

# cPanel API 2 Functions - WebmailApps::listwebmailapps

Guide to cPanel API 2

Return Data

Filter and Sort Output

Paginate Output

Output Columns

Calls from the WHM API

cPanel Tags (deprecated)

AddonDomain:: adddondomain

omain

AddonDomain:: deladdondomain

AddonDomain:: listaddondomains

## Backups

Backups:: listfullbackups

## Bandwidth

Bandwidth:: addhttpbandwidth

Bandwidth:: getbwdata

Bandwidth:: gethourlyaveragebwoveryear

## BoxTrapper

BoxTrapper:: accountmanagelist

## Branding

Branding:: addbrandingobj

Branding:: applist

Branding:: brandingeditor

Branding:: createpkg

Branding:: cssmerge

Branding:: delbrandingobj

Branding:: delpkg

Branding:: gensprites

## Description

This function retrieves information about an account's Webmail applications.

### Warning:

- We **strongly** recommend that you use the following **UAPI** function instead of this function:
  - `WebmailApps::listwebmailapps` — This function lists the account's available webmail clients.
- We deprecated **and** removed this function in cPanel & WHM version 11.44. For help to update custom code that uses this function, send an email to [integration@cpanel.net](mailto:integration@cpanel.net).

### Important:

In cPanel & WHM version 76 and later, when you disable the Webmail role, the system **disables** this function. For more information, read our [How to Use Server Profiles](#) documentation.

## Examples

### WHM API (JSON)

```
https://hostname.example.com:2087/cpsess#####/json-api/cpanel?cpanel_jsonapi_user=user&cpanel_jsonapi_api_version=2&cpanel_jsonapi_module=WebmailApps&cpanel_jsonapi_func=listwebmailapps
```

### Note:

For more information, read our [Calls from the WHM API](#) documentation.

## Function information

## About this module

The Webmail Apps module displays information about the account's Webmail applications.

Branding:: getbrandingpkg

Branding:: getbrandingpkgstatus

Branding:: getdefaultbrandingpkg

Branding:: installbrandingpkgs

Branding:: installimages

Branding:: killimages

Branding:: listingtypes

Branding:: listobjecttypes

Branding:: preloadconf

Branding:: resetall

Branding:: resetscripts

Branding:: resethtml

Branding:: resolvefile

Branding:: resolvelocalcss

Branding:: savelocalcss

Branding:: setbrandingpkgstatus

Branding:: showpackages

Branding:: spritelist

#### ▼ CSVImport

CSVImport:: columnchoices

CSVImport:: configimport

CSVImport:: data

CSVImport:: fetchimportdata

CSVImport:: isenabled

CSVImport:: loaddata

CSVImport:: processdata

CSVImport:: sendcontact

CSVImport:: uploadimport

#### ▼ LiveAPI PHP Class

```
$cpanel = new  
CPANEL(); // Connect  
to cPanel - only do  
this once.
```

```
// List Webmail  
applications  
$list_webmail =  
$cpanel->api2(  
    'WebmailApps',  
    'listwebmailapps'  
);
```

#### Note:

For more information, read our [Guide to the LiveAPI System](#).

#### ▼ LiveAPI Perl Module

```
my $cpliveapi =  
Cpanel::LiveAPI->new(  
); # Connect to  
cPanel - only do this  
once.
```

```
# List Webmail  
applications  
my $list_webmail =  
$cpliveapi->api2(  
    'WebmailApps',  
    'listwebmailapps',  
);
```

#### Note:

For more information, read our [Guide to the LiveAPI System](#).

## About cPanel API 2

cPanel API 2 accesses and modifies data for cPanel accounts.

#### Notes:

- The  
Fe  
  
int  
• Ur  
mi  
us  
20  
or  
20  
)`  
20  
or  
20  
)

## Find a function

-

- Contactus:: isenab led
    - Contactus:: sendc ontact
  - Cron
    - Cron:: add\_line
    - Cron:: edit\_line
    - Cron:: fetchcron
    - Cron:: get\_email
    - Cron:: listcron
    - Cron:: remove\_line
    - Cron:: set\_email
  - CustInfo
    - CustInfo:: contacte mails
    - CustInfo:: contactp refs
    - CustInfo:: displayc ontactinfo
    - CustInfo:: savecon tactinfo
  - DBmap
    - DBmap:: status
    - DBmap:: version
  - DKIMUI
    - DKIMUI:: available
    - DKIMUI:: getrecor ds
    - DKIMUI:: install
    - DKIMUI:: installed
    - DKIMUI:: uninstall
  - Denylp
    - Denylp:: listdenyip s
  - DiskCounter
    - DiskCounter:: disk \_counter
  - DiskUsage
    - DiskUsage:: buildc ache
    - DiskUsage:: clearc ache
    - DiskUsage:: fetch\_ raw\_disk\_usage
    - DiskUsage:: fetchd iskusage
    - DiskUsage:: fetchd iskusagewithextras

## ▼ cPanel Tag System (deprecated)

### Warnings:

- In cPanel & WHM version 11.30 and later, cPanel tags are **deprecat ed**. We **strongly** recommend that you **only** use the [LiveAPI](#) system to call the cPanel APIs. Examples are **only** present in order to help developers move from the old cPanel tag system to our [LiveAPI](#).
- cPanel API 2 calls that use cPanel tags vary in code syntax and in their output.
- For more information, read our [Dep recated cPanel Tag Usage](#) docume ntation.

## ▼ Command Line

Because we removed this function before we introduced this functionality, you cannot call this function via the command line.

### Notes:

- You **must** [URI-encode](#) values.
- `username` represents your account-level username.
- You **must** run the `--user=username` command.
- For more information and additional output options, read our [Guide to cPanel API 2](#) documentation or run the `cpapi2 --help` command.
- If you run CloudLinux™, you **must** use the full path of the `cpapi2` command:

```
/usr/local
/cpanel/bi
n/cpapi2
```

## ▼ Output (JSON)

```
{
  "cpanelresult": {
    "apiversion": 2,
    "func":
```

- cPan el API 2 Func tions - Emai l::edit quot a — This functi on modi fies an email acco unt's disk quot a.
- cPan el API 2 Func tions - Emai l::pas swdp op — This functi on modi fies an email acco unt's pass word .

- ▼ DnsLookup
  - DnsLookup:: name2ip
- ▼ DomainLookup
  - DomainLookup:: countbaseddomains
  - DomainLookup:: getbaseddomains
  - DomainLookup:: getdocroot
  - DomainLookup:: getdocroots
  - DomainLookup:: getmaindomain
- ▼ Email
  - Email:: accountname
  - Email:: adddomainforward
  - Email:: addforward
  - Email:: addmx
  - Email:: addpop
  - Email:: browseboxes
  - Email:: changemx
  - Email:: checkmaindiscard
  - Email:: clearpopcache
  - Email:: deletefilter
  - Email:: delforward
  - Email:: delmx
  - Email:: delpop
  - Email:: disablefilter
  - Email:: editquota
  - Email:: enablefilter
  - Email:: fetchautoreponder
  - Email:: fetchcharmaps
  - Email:: filteractions
  - Email:: filterlist
  - Email:: filtername
  - Email:: filterrules
  - Email:: get\_archiving\_configuration
  - Email:: get\_archiving\_default\_configu

```

"listwebmailapps",
  "data": [
    {
      "feature":
        "horde",
      "icon":
        "/webmail/x3mail/images/horde.gif",
      "url":
        "/cpsess1658535621/horde/index.php?cpanel=1",
      "id":
        "horde",
      "displayname":
        "Horde",
      "if":
        "!$CONF{ 'skiphorde' }"
    },
    {
      "icon":
        "/webmail/x3mail/images/roundcube_logo.png",
      "url":
        "/cpsess1658535621/3rdparty/roundcube/index.php",
      "id":
        "roundcube",
      "displayname":
        "RoundCube",
      "if":
        "!$CONF{ 'skiproundcube' }"
    },
    {
      "feature":
        "squirrelmail",
      "icon":
        "/webmail/x3mail/images/squirrelmail_logo.gif",
      "url":
        "/cpsess1658535621/3rdparty/squirrelmail/index.php",
      "id":
        "squirrelmail",
      "displayname":

```

- cPanel API 2 Functions - Email::listdefaultaddresses — This function retrieves the domain's default address and its rules.
- cPanel API 2 Functions - Email::listaliasbackups — This function retrieves a list of the account's domains that use aliases and custom default addresses.

ration  
Email: get\_archiving\_types  
Email: get\_default\_email\_quota  
Email: get\_email\_signing  
Email: get\_max\_email\_quota  
Email: getabsbrowse\_dir  
Email: getalwaysaccept  
Email: getdiskusage  
Email: getmxcheck  
Email: has\_delegated\_mailman\_lists  
Email: list\_system\_filter\_info  
Email: listaliasesbackups  
Email: listautoresponders  
Email: listdefaultaddresses  
Email: listdomainforwards  
Email: listfilterbackups  
Email: listfilters  
Email: listforwards  
Email: listlists  
Email: listmaildomains  
Email: listmx  
Email: listmxs  
Email: listpops  
Email: listpopssingle  
Email: listpopswithdisk  
Email: listpopswithimage  
Email: loadfilter  
Email: passwdpop  
Email: reorderfilters

```
"SquirrelMail",  
  "if":  
"!$CONF{'skipsqmail'}  
"  
  }  
],  
  "event": {  
    "result": 1  
  },  
  "module":
```

Email:: [set\\_archiving\\_configuration](#)

Email:: [set\\_archiving\\_default\\_configuration](#)

Email:: [set\\_email\\_signing](#)

Email:: [setalwaysaccept](#)

Email:: [setdefaultaddress](#)

Email:: [setmxcheck](#)

Email:: [storefilter](#)

Email:: [tracefilter](#)

#### ▼ [EmailTrack](#)

EmailTrack:: [search](#)

EmailTrack:: [stats](#)

EmailTrack:: [trace](#)

#### ▼ [Encoding](#)

Encoding:: [get\\_encodings](#)

Encoding:: [guess\\_file](#)

Encoding:: [guess\\_file\\_opts](#)

#### ▼ [FSTest](#)

FSTest:: [dirisempty](#)

#### ▼ [Fileman](#)

Fileman:: [autocomplete\\_dir](#)

Fileman:: [fileop](#)

Fileman:: [getabsdir](#)

Fileman:: [getdir](#)

Fileman:: [getdiractions](#)

Fileman:: [getdiskinfo](#)

Fileman:: [getedittyope](#)

Fileman:: [getfileactions](#)


Fileman:: [getpath](#)

Fileman:: [listfiles](#)

Fileman:: [mkdir](#)

Fileman:: [mkfile](#)

Fileman:: [savefile](#)

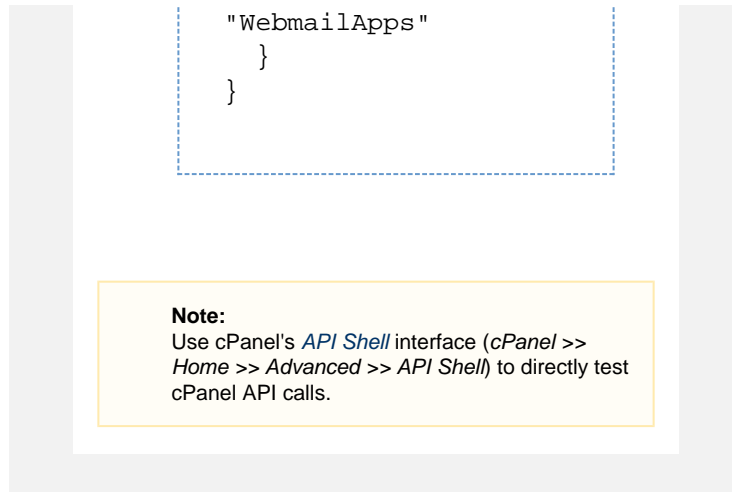

## Parameters

This function does not accept parameters.

## Returns

Parameter	Type	Description	Possible values	Example
<code>feature</code>	<i>string</i>	The Webmail application's feature name.	A valid string.	horde
<code>icon</code>	<i>string</i>	The path to the Webmail application's icon file.	A valid file path, relative to the home directory.	<code>/webmail/x3mail/images/horde.gif</code>
<code>url</code>	<i>string</i>	The URL to the Webmail application's location.	A valid URL, relative to the home directory.	<code>/cpsess1658535621/horde/index.php?cpanel=1</code>
<code>id</code>	<i>string</i>	The Webmail application's ID.	A valid string.	horde
<code>displayname</code>	<i>string</i>	The Webmail application's display name.	A valid string.	Horde
<code>if</code>	<i>string</i>	The conditional statement that the interface uses to determine whether to display the Webmail application.	A conditional statement.  For more information, read <a href="#">this Stackoverflow article</a> .	<code>!\$CONF{'skiphorde'}</code>

- Fileman:: search
- Fileman:: statfiles
- Fileman:: uploadfiles
- Fileman:: viewfile
- ▼ ForcePassword
  - ForcePassword:: get\_force\_password\_flags
  - ForcePassword:: update\_force\_password\_flags
- ▼ Frontpage
  - Frontpage:: fopenabled
  - Frontpage:: list
- ▼ Ftp
  - Ftp:: addftp
  - Ftp:: delftp
  - Ftp:: listftp
  - Ftp:: listftpsessions
  - Ftp:: listftpwithdisk
  - Ftp:: passwd
  - Ftp:: setquota
- ▼ Gpg
  - Gpg:: listgpgkeys
  - Gpg:: listsecretgpgkeys
  - Gpg:: number\_of\_private\_keys
  - Gpg:: number\_of\_public\_keys
- ▼ Htaccess
  - Htaccess:: listusers
  - Htaccess:: listusers
- ▼ HttpUtils
  - HttpUtils:: getdirindices
- ▼ ImageManager
  - ImageManager:: thumbnail
- ▼ LVEInfo
  - LVEInfo:: getUsage
- ▼ LangMods
  - LangMods:: getarcname
  - LangMods:: getkey

reason	string	A reason for failure. <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"><b>Note</b> : This function only returns a reason value if it failed.</div>	A string that describes the error.	This is an error message.
result	Boolean	Whether the function succeeded.	<ul style="list-style-type: none"> <li>• 1 — The function succeeded.</li> <li>• 0 — The function failed.</li> </ul>	1

LangMods:: getpre  
fix

LangMods:: install

LangMods:: langlis  
t

LangMods:: list\_av  
ailable

LangMods:: list\_in  
stalled

LangMods:: magic  
\_status

LangMods:: pre\_ru  
n

LangMods:: search

LangMods:: setup

LangMods:: uninst  
all

LangMods:: updat  
e

▼ LeechProtect

LeechProtect:: set  
up

▼ Locale

Locale:: get\_encod  
ing

Locale:: get\_html\_  
dir\_attr

Locale:: get\_locale  
\_name

Locale:: get\_user\_  
ocale

Locale:: get\_user\_  
ocale\_name

Locale:: numf

▼ Logaholic

Logaholic:: adduse  
r

Logaholic:: adduse  
rprofile

Logaholic:: deleteu  
ser

Logaholic:: deleteu  
serprofile

Logaholic:: edituse  
r

Logaholic:: fetchus  
er

Logaholic:: listuser  
profiles

Logaholic:: logahol  
iclink



Logaholic:: proces  
sstats

▼ Mime

Mime:: list\_hotlinks

Mime:: listhandlers

Mime:: listmime

Mime:: listredirects

Mime:: redirectname

Mime:: redirecturlname

▼ MysqlFE

MysqlFE:: authorizehost

MysqlFE:: change  
dbuserpassword

MysqlFE:: created  
b

MysqlFE:: created  
buser

MysqlFE:: dbuserexists

MysqlFE:: deauthorizehost

MysqlFE:: deleted  
b

MysqlFE:: deleted  
buser

MysqlFE:: getalldb  
sinfo

MysqlFE:: getalldb  
usersanddbs

MysqlFE:: getdatabasesprivileges

MysqlFE:: getdatabases

MysqlFE:: gethosts

MysqlFE:: getmysqlprivileges

MysqlFE:: getmysqlserverprivileges

MysqlFE:: has\_my  
cnf\_for\_cpuser

MysqlFE:: listdbs

MysqlFE:: listdatabasesackup

MysqlFE:: listhosts

MysqlFE:: listusers

MysqlFE:: listusers  
indb

MysqlFE:: revoked  
buserprivileges

MysqlFE:: setdbu  
erprivileges

MysqlFE:: userdbp  
rivs

▼ MysqlOptimizer

MysqlOptimizer:: f  
etch\_slow\_queries

▼ NVData

NVData:: get

NVData:: set

NVData:: setall

▼ Net

Net:: dnszone

Net:: traceroute

▼ News

News:: does\_news  
\_exist

News:: does\_news  
\_type\_exist

News:: get\_news

▼ PHPINI

PHPINI:: getallopti  
ons

PHPINI:: getoption  
s

▼ Park

Park:: listaddondo  
mains

Park:: listparkeddo  
mains

Park:: park

Park:: unpark

▼ Passwd

Passwd:: change\_  
password

Passwd:: set\_dige  
st\_auth

▼ PasswdStrength

PasswdStrength::  
appstrengths

PasswdStrength::  
get\_password\_stre  
ngth

PasswdStrength::  
get\_required\_stren  
gth

▼ Postgres

Postgres:: listdbs

Postgres:: listusers

Postgres:: listusers  
indb

Postgres:: userexi  
sts

▼ Rand

Rand:: getranddat  
a

▼ Resellers

Resellers:: get\_su  
b\_accounts

▼ RoR

RoR:: addapp

RoR:: changeapp

RoR:: importrails

RoR:: listapps

RoR:: listrewrites

RoR:: needsimport

RoR:: removeapp

RoR:: removerewri  
te

RoR:: restartapp

RoR:: setuprewrite

RoR:: softrestartap  
p

RoR:: startapp

RoR:: stopapp

▼ SetLang

SetLang:: setlocale

▼ SourceIPCheck

SourceIPCheck:: a  
ddip

SourceIPCheck:: d  
elip

SourceIPCheck:: g  
etaccount

SourceIPCheck:: li  
stips

SourceIPCheck:: l  
oadsecquestions

SourceIPCheck:: r  
esetsecquestions

SourceIPCheck:: s  
amplequestions

SourceIPCheck:: s  
avesecquestions

▼ SPFUJ

SPFUJ:: available

SPFUJ:: count\_sett  
ings

SPFUI:: entries\_co  
mplete

SPFUI:: get\_raw\_r  
ecord

SPFUI:: getmainse  
rverip

SPFUI:: install

SPFUI:: installed

SPFUI:: list\_settin  
gs

SPFUI:: load\_curr  
ent\_values

SPFUI:: uninstall

▼ SSH

SSH:: authkey

SSH:: converttopp  
k

SSH:: delkey

SSH:: fetchkey

SSH:: genkey

SSH:: genkey\_leg  
acy

SSH:: importkey

SSH:: listkeys

▼ SSL

SSL:: fetchcabundl  
e

SSL:: fetchinfo

SSL:: genctr

SSL:: gencsr

SSL:: genkey

SSL:: getcnname

SSL:: installssl

SSL:: listcrts

SSL:: listcsrs

SSL:: listkeys

SSL:: listsslitems

SSL:: uploadcrt

SSL:: uploadkey

▼ SSLInfo

SSLInfo:: fetchinfo

▼ StatCache

StatCache:: clearc  
ache

▼ Stats

Stats:: getmonthly

bandwidth

Stats:: getmonthly  
domainbandwidth

Stats:: getthismont  
hsbwusage

Stats:: lastapache  
hits

Stats:: lastvisitors

Stats:: listanalog

Stats:: listawstats

Stats:: listlastvisito  
rs

Stats:: listrawlogs

Stats:: listurchin

Stats:: listwebalize  
r

▼ StatsBar

StatsBar:: getrowc  
ounter

StatsBar:: rowcoun  
ter

StatsBar:: setrowc  
ounter

StatsBar:: stat

▼ SubDomain

SubDomain:: adds  
ubdomain

SubDomain:: chan  
gedocroot

SubDomain:: delsu  
bdomain

SubDomain:: getre  
servedsubdomains

SubDomain:: listsu  
bdomains

SubDomain:: validr  
egex

▼ Themes

Themes:: apply\_n  
ew\_theme

Themes:: does\_cp  
anel\_theme\_exist

Themes:: get\_avail  
able\_themes

Themes:: get\_the  
mes\_list

Themes:: restore\_  
saved\_theme

▼ UI

UI:: dynamicinclud  
elist

UI:: includelist

UI:: listform

UI:: paginate

UI:: paginate\_list

▼ UserHttpUtils

UserHttpUtils:: get  
dirindices

▼ WebDisk

WebDisk:: addweb  
disk

WebDisk:: delweb  
disk

WebDisk:: hasdige  
st

WebDisk:: listwebd  
isks

WebDisk:: passwd  
webdisk

WebDisk:: set\_dig  
est\_auth

WebDisk:: set\_ho  
mdir

WebDisk:: set\_per  
ms

WebDisk:: setstatu  
s

▼ WebmailApps

WebmailApps:: list  
webmailapps

▼ ZoneEdit

ZoneEdit:: add\_zo  
ne\_record

ZoneEdit:: edit\_zo  
ne\_record

ZoneEdit:: fetch\_c  
panel\_generated\_  
domains

ZoneEdit:: fetchzo  
ne

ZoneEdit:: fetchzo  
ne\_records

ZoneEdit:: fetchzo  
nes

ZoneEdit:: get\_zon  
e\_record

ZoneEdit:: remove  
\_zone\_record

ZoneEdit:: resetzo  
ne

