

UAPI Functions - ResourceUsage::get_usages

Guide to UAPI

- Return Data
- Filter Output
- Sort Output
- Paginate Output
- Output Columns
- Calls from the WHM API
- Custom UAPI Modules

- Backup
 - Backup::fullbackup_to_ftp
 - Backup::fullbackup_to_homedir
 - Backup::fullbackup_to_scp_with_key

- Backup::fullbackup_to_scp_with_password
- Backup::list_backups

- Bandwidth
 - Bandwidth::get_enabled_protocols
 - Bandwidth::get_retention_periods
 - Bandwidth::query

- Batch
 - Batch::strict

- Brand
 - Brand::read

- Branding
 - Branding::file
 - Branding::get_applications
 - Branding::get_application_information
 - Branding::get_available_applications
 - Branding::get_information_for_applications

Description

This function retrieves resource usage and custom statistics for a cPanel user account. For more information, read our [cPanel Interface](#) and [cPanel Plugins - Pluggable Statistics Modules](#) documentation.

Examples

▼ cPanel or Webmail Session URL

```
https://hostname.example.com:2083/cpsess#####/execute/ResourceUsage/get_usages
```

Note:

This example calls the UAPI function via a cPanel session. For more information, read our [Guide to UAPI](#) documentation.

▼ LiveAPI PHP Class

```
$cpanel = new CPANEL(); // Connect to cPanel - only do this once.  
  
// Retrieve resource usage statistics for a cPanel user account.  
$get_usages = $cpanel->uapi('ResourceUsage', 'get_usages');
```

Note:

For more information, read our [Guide to the LiveAPI System](#).

Function information

About this module

The ResourceUsage module displays resource use statistics.

About UAPI

UAPI accesses and modifies data for cPanel accounts.

- Branding:: image
- Branding:: include
- Branding:: spritelist
- ▼ CacheBuster
 - CacheBuster:: read
 - CacheBuster:: update
- ▼ Chkservd
 - Chkservd:: get_external_ports
 - Chkservd:: get_external_ports_ssl
- ▼ Chrome
 - Chrome:: get_domain
- ▼ Contactus
 - Contactus:: is_enabled
- ▼ cPAddons
 - cPAddons:: get_available_addons
 - cPAddons:: get_instance_settings
 - cPAddons:: list_addon_instances
- ▼ cPGreyList
 - cPGreyList:: disable_all_domains
 - cPGreyList:: disable_domains
 - cPGreyList:: enable_all_domains
 - cPGreyList:: enable_domains
 - cPGreyList:: has_greylisting_enabled
 - cPGreyList:: list_domains
- ▼ DAV
 - DAV:: disable_shared_global_addressbook
 - DAV:: enable_shared_global_addressbook
 - DAV:: get_calendar_contacts_config
 - DAV:: has_shared_global_addressbook
 - DAV:: is_dav_service_enabled

▼ LiveAPI Perl Module

```
my $cpliveapi =  
Cpanel::LiveAPI->new(  
); # Connect to  
cPanel - only do this  
once.  
  
# Retrieve resource  
usage statistics for  
a cPanel user  
account.  
my $get_usages =  
$cpanel->uapi(  
  'ResourceUsage',  
  'get_usages'  
);
```

Note:
For more information, read our [Guide to the LiveAPI System](#).

▼ cPanel Template Toolkit

```
<!-- List the  
account's resource  
usage statistics. -->  
[% data = execute(  
  'ResourceUsage',  
  'get_usages' ); %]  
[% FOREACH q = data  
  %]  
  <p>  
    [% q %]  
  </p>  
[% END %]
```

Note:
For more information, read our [Guide to Template Toolkit documentation](#).

Notes:

- [Th](#)
[Fe](#)
- [Ur](#)
[mu](#)
[us](#)
[20](#)
[or](#)
[20](#)
[\).\`](#)
[20](#)
[or](#)
[20](#)
[\).](#)

Find a function

- [glob](#)
[ally](#)
[uniq](#)
[ue](#)
[identi](#)
[fier \(](#)
[GUI](#)
[D\)](#)
[by](#)
[folde](#)
[r.](#)
- [UAPI](#)
[Mod](#)
[ules](#)
[-](#)
[Mailb](#)
[oxes](#)
— [T](#)
[he](#)
[M](#)
[ailb](#)
[oxes](#)
[mod](#)
[ule](#)
[man](#)
[ages](#)
[email](#)
[mess](#)
[ages](#)
[.](#)

DAV:: is_horde_enabled

▼ DCV

DCV:: check_domains_via_dns

DCV:: check_domains_via_http

DCV:: ensure_domains_can_pass_dcv

▼ DomainInfo

DomainInfo:: domains_data

DomainInfo:: list_domains

DomainInfo:: main_domain_builtin_subdomain_aliases

DomainInfo:: single_domain_data

▼ DNS

DNS:: ensure_domains_reside_only_locally

DNS:: has_local_authority

▼ DNSSEC

DNSSEC:: disable_dnssec

DNSSEC:: enable_dnssec

DNSSEC:: fetch_dns_records

DNSSEC:: set_nsec3

DNSSEC:: unset_nsec3

▼ Email

Email:: account_name

Email:: add_auto_responder

Email:: add_domain_forwarder

Email:: add_forwarder

Email:: add_list

Email:: add_mailman_delegates

Email:: add_mx

Email:: add_pop

Email:: add_spam_filter

▼ Command Line

```
uapi --user=username  
ResourceUsage  
get_usages
```

Notes:

- You **must** URI-encode values.
- username represents your account-level username.
- For more information and additional output options, read our [Guide to UAPI](#) documentation or run the `uapi --help` command.
- If you run CloudLinux™, you **must** use the full path of the `uapi` command:

```
/usr/local  
/cpanel/bin/uapi
```

▼ Output (JSON)

```
{  
  "errors": null,  
  "messages": null,  
  "metadata": {  
    "transformed": 1  
  },  
  "status": 1,  
  "data": [  
    {  
      "description":  
        "Disk Usage",  
      "formatter":  
        "format_bytes",  
      "id":  
        "disk_usage",  
      "maximum": undef,  
      "url":  
        "diskusage/index.html"  
    },  
    {  
      "usage": "4427776"  
    },  
    {  
      "description":  
        "MySQL® Disk Usage",  
      "formatter":  
        "format_bytes",
```

- UAPI Functions - Email::edit_pop_quota — This function changes an email address's quota.
- UAPI Functions - SpamAssassin::get_user_preferences — This function lists the Apache SpamAssassin™ settings for the account.

Email: browse_mailbox
Email: change_mx
Email: check_fastmail
Email: check_pipe_forwarder
Email: delete_auto_responder
Email: delete_domin_main_forwarder
Email: delete_filter
Email: delete_forwarder
Email: delete_held_messages
Email: delete_list
Email: delete_mx
Email: delete_pop
Email: disable_filter
Email: disable_mailbox_autocreate
Email: disable_spam_assassin
Email: disable_spam_autodelete
Email: disable_spam_box
Email: dispatch_client_settings
Email: edit_pop_quota
Email: enable_filter
Email: enable_mailbox_autocreate
Email: enable_spam_assassin
Email: enable_spam_box
Email: fetch_charmaps
Email: fts_rescan_mailbox
Email: generate_mailman_opt
Email: get_auto_responder
Email: get_chase

```
"id":  
"cachedmysqldiskusage",  
  "maximum": undef,  
  "url": undef,  
  "usage": 0  
}, {  
  "description":  
"Bandwidth",  
  "formatter":  
"format_bytes",  
  "id": "bandwidth",  
  "maximum":  
1048576000,  
  "url":  
"stats/bandwidth.html",  
  "usage": 2986  
}, {  
  "description":  
"Addon Domains",  
  "formatter": undef,  
  "id":  
"addon_domains",  
  "maximum": undef,  
  "url":  
"addon/index.html",  
  "usage": 4  
}, {  
  "description":  
"Subdomains",  
  "formatter": undef,  
  "id": "subdomains",  
  "maximum": undef,  
  "url":  
"subdomain/index.html",  
  "usage": "4"  
}, {  
  "description":  
"Aliases",  
  "formatter": undef,  
  "id": "aliases",  
  "maximum": undef,  
  "url":  
"park/index.html",  
  "usage": 0  
}, {  
  "description":  
"Email Accounts",  
  "formatter": undef,  
  "id":  
"email_accounts",
```

- UAPI Functions - SpamAssassin::clear_spam_box - This function clears the spam box of all its contents for all email accounts.

ts
Email: get_client_settings
Email: get_default_email_quota
Email: get_default_email_quota_mib
Email: get_disk_usage
Email: get_filter
Email: get_held_message_count
Email: get_mailbox_autocreate
Email: get_mailman_delegates
Email: get_main_account_disk_usage
Email: get_main_account_disk_usage_bytes
Email: get_max_email_quota
Email: get_max_email_quota_mib
Email: get_pop_quota
Email: get_spam_settings
Email: get_webmail_settings
Email: has_delegated_mailman_lists
Email: has_plaintext_authentication
Email: hold_outgoing
Email: is_integer
Email: list_autoresponders
Email: list_default_address
Email: list_domain_forwarders
Email: list_filters
Email: list_filters_backups
Email: list_forwarders
Email: list_forward

```
"maximum": undef,  
"url":  
"mail/pops/index.html",  
  "usage": 1  
}, {  
  "description":  
  "Mailing Lists",  
  "formatter": undef,  
  "id":  
  "mailing_lists",  
  "maximum": undef,  
  "url":  
  "mail/lists.html",  
  "usage": 0  
}, {  
  "description":  
  "Autoresponders",  
  "formatter": undef,  
  "id":  
  "autoresponders",  
  "maximum": undef,  
  "url":  
  "mail/autores.html",  
  "usage": 0  
}, {  
  "description":  
  "Forwarders",  
  "formatter": undef,  
  "id": "forwarders",  
  "maximum": undef,  
  "url":  
  "mail/fwds.html",  
  "usage": 0  
}, {  
  "description":  
  "Email Filters",  
  "formatter": undef,  
  "id":  
  "email_filters",  
  "maximum": undef,  
  "url":  
  "mail/filters/management_filters.html",  
  "usage": 1  
}, {  
  "description": "FTP  
Accounts",  
  "formatter": undef,  
  "id":  
  "ftp_accounts",
```

ers_backups
Email: list_lists
Email: list_mail_omains
Email: list_mx
Email: list_pops
Email: list_pops_with_disk
Email: list_system_filter_info
Email: passwd_list
Email: passwd_pop
Email: release_outgoing
Email: remove_mailman_delegates
Email: reorder_filters
Email: set_always_accept
Email: set_default_address
Email: set_list_privacy_options
Email: stats_db_status
Email: store_filter
Email: suspend_incoming
Email: suspend_login
Email: suspend_outgoing
Email: trace_filter
Email: unsuspend_incoming
Email: unsuspend_login
Email: unsuspend_outgoing
Email: verify_password
▼ EmailAuth
EmailAuth: disable_dkim
EmailAuth: enable_dkim
EmailAuth: ensure_dkim_keys_exist

```
"maximum": undef,  
"url":  
"ftp/accounts.html",  
"usage": "0"  
}, {  
  "description":  
  "MySQL® Databases",  
  "formatter": undef,  
  "id":  
  "mysql_databases",  
  "maximum": 15,  
  "url":  
  "sql/index.html",  
  "usage": 0  
}, {  
  "description":  
  "Percentage",  
  "formatter":  
  "format_bytes",  
  "id": "disk_usage",  
  "maximum": undef,  
  "url":  
  "diskusage/index.html",  
  "usage": 4427776
```

EmailAuth:: fetch_
dkim_private_keys

EmailAuth:: install_
_dkim_private_key
s

EmailAuth:: install_
_spf_records

EmailAuth:: validat
e_current_dkims

EmailAuth:: validat
e_current_ptrs

EmailAuth:: validat
e_current_spfs

ExternalAuthenticat
ion

ExternalAuthentic
ation:: add_authn_li
nk

ExternalAuthentic
ation:: configured_
modules

ExternalAuthentic
ation:: get_authn_lin
ks

ExternalAuthentic
ation:: has_external_
_auth_modules_co
nfigured

ExternalAuthentic
ation:: remove_auth
n_link

Features

Features:: has_fea
ture

Features:: list_feat
ures

Fileman

Fileman:: autocom
pletedir

Fileman:: empty_tr
ash

Fileman:: get_file_
content

Fileman:: get_file_i
nformation

Fileman:: list_files


Fileman:: save_file_
content

Fileman:: transcod
e

Fileman:: upload_fi
les

Ftp

Ftp:: add_ftp

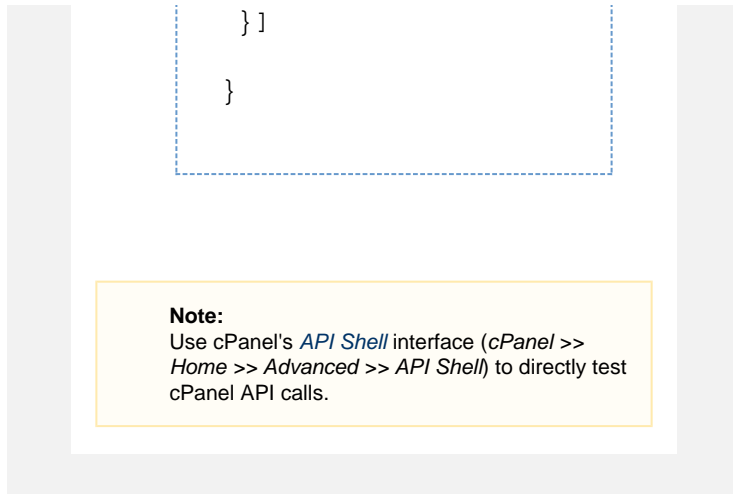

Parameters

This function does not accept parameters.

Returns

Return	Type	Description	Possible values	Example
data	array of hashes	This array of hashes contains results from the account's query.	This array of hashes contains the description, formatter, id, maximum, url, and usage returns.	
description	string	The resource's UI display name. This function returns this value in the data array of hashes.	A string value.	MySQL® Databases
formatter	string	The resource's defined output format, if applicable. Note: Third-party modules will return their defined formatter value. This function returns this value in the data array of hashes.	<ul style="list-style-type: none"> format_bytes format_bytes_per_second percent An undefined value. 	format_bytes
id	string	The resource's reference name. Notes: <ul style="list-style-type: none"> Ce 	<ul style="list-style-type: none"> disk_usage filesusage 	mysql_databases

Ftp:: allows_anonymous_ftp

Ftp:: allows_anonymous_ftp_incoming

Ftp:: delete_ftp

Ftp:: ftp_exists

Ftp:: get_ftp_daemon_info

Ftp:: get_port

Ftp:: get_quota

Ftp:: get_welcome_message

Ftp:: kill_session

Ftp:: list_ftp

Ftp:: list_ftp_with_disk

Ftp:: list_sessions

Ftp:: passwd

Ftp:: server_name

Ftp:: set_anonymous_ftp

Ftp:: set_anonymous_ftp_incoming

Ftp:: set_homedir

Ftp:: set_quota

Ftp:: set_welcome_message

▼ Integration

Integration:: fetch_url

▼ KnownHosts

KnownHosts:: create

KnownHosts:: delete

KnownHosts:: update

KnownHosts:: verify

▼ LangPHP

LangPHP:: php_get_domain_handler

LangPHP:: php_get_impacted_domains

LangPHP:: php_get_installed_versions

LangPHP:: php_get

r
t
a
i
n
i
d
v
a
l
u
e
s
m
a
y
n
o
t
d
i
s
p
l
a
y
,
b
a
s
e
d
o
n
t
h
e
s
e
r
v
e
r
'
s
c
u
r
r
e
n
t
p
r
o
f
i
l
e
. F
o
r
m
o
r
e
i
n
f
o
r
m
a
t
i
o
n
,
r
e
a
d
o
u
r
H
o
w
t

N
o
t
e
:
T
h
i
s
f
u
n
c
t
i
o
n
o
n
l
y
r
e
t
u
r
n
s
t
h
i
s
v
a
l
u
e
i
f
t
h
e
D
i
s
p
l
a
y
F
i
l
e
U
s
a
g
e
i
n
f
o
r
m
a
t
i
o
n
i
n
t
h
e
c
P
a
n
e
l
s
t
a
t
s
b
a
r
s
e

t_system_default_version
LangPHP:: php_get_vhost_versions
LangPHP:: php_ini_get_user_basic_directives
LangPHP:: php_ini_get_user_content
LangPHP:: php_ini_get_user_paths
LangPHP:: php_ini_set_user_basic_directives
LangPHP:: php_ini_set_user_content
LangPHP:: php_set_vhost_versions

▼ LastLogin

LastLogin:: get_last_or_current_logged_in_ip

▼ Locale

Locale:: get_attributes

▼ Mailboxes

Mailboxes:: expunge_mailbox_messages

Mailboxes:: expunge_messages_for_mailbox_guid

Mailboxes:: get_mailbox_status

Mailboxes:: has_utf8_mailbox_names

Mailboxes:: set_utf8_mailbox_names

▼ Market

Market:: cancel_pending_ssl_certificate

Market:: create_shopping_cart

Market:: get_all_products

Market:: get_certificate_status_details

Market:: get_login_url

Market:: get_pending_ssl_certificates

Market:: get_provi

o
U
S
E
R
S
E
R
P
R
O
F
I
L
E
S
D
O
C
U
M
E
N
T
A
T
I
O

t
t
i
n
g
i
s
e
n
a
b
l
e
d
i
n
t
h
e
D
i
s
p
l
a
y
s
e
c
t
i
o
n
o
f
W
H
M
,
s
T
w
e
a
k
S
e
t
t
i
n
g
s
i
n
t
e
r
f
a
c
e
(
W
H
M
>
>
H
o
m
e
>
>
S
e
r
v
e
r
C
o
n
f
i
g
u
r
a

der_specific_dcv_constraints

Market:: get_providers_list

Market:: get_ssl_certificate_if_available

Market:: process_ssl_pending_queue

Market:: request_ssl_certificates

Market:: set_status_of_pending_queue_items

Market:: set_url_after_checkout

Market:: validate_login_token

▼ Mime

Mime:: add_handler

Mime:: add_hotlink

Mime:: add_mime

Mime:: add_redirect

Mime:: delete_handler

Mime:: delete_hotlink

Mime:: delete_mime

Mime:: delete_redirect

Mime:: list_handlers

Mime:: list_hotlinks

Mime:: list_mime

Mime:: list_redirects

Mime:: redirect_info

▼ ModSecurity

ModSecurity:: disable_all_domains

ModSecurity:: disable_domains

ModSecurity:: enable_all_domains

ModSecurity:: enable_domains

ModSecurity:: has_modsecurity_inst

n . W e c h a n g e d t h i s r e t u r n i n c p a n e l & W H M v e r s i o n 7 6 .

t i o n > T w e a k S e t t i n g s

This function returns this value in the data array of hashes.

alled

ModSecurity:: list_domains

▼ Mysql

Mysql:: add_host

Mysql:: add_host_note

Mysql :: check_database

Mysql:: create_database

Mysql:: create_user

Mysql:: delete_database

Mysql:: delete_host

Mysql:: delete_user

Mysql:: get_host_notes

Mysql:: get_privileges_on_database

Mysql:: get_restrictions

Mysql:: get_server_information

Mysql:: locate_server

Mysql:: rename_database

Mysql:: rename_user

Mysql:: repair_database

Mysql:: revoke_access_to_database

Mysql:: set_password

Mysql:: set_privileges_on_database

▼ Notifications

Notifications:: get_notifications_count

▼ NVData

NVData:: get

NVData:: set

▼ Parser

Parser:: firstfile_relative_uri

▼ PassengerApps

)
.

- cachedmysql.disk.usage
- cachedpostgres.disk.usage

**N
o
t
e
:
T
h
i
s
f
u
n
c
t
i
o
n
o
n
l
y
r
e
t
u
r
n
s
t
h
i
s
v
a
l
u
e
i
f
P
o
s
t
g
r
e
S
Q
L
®
d
a
t
a
b
a
s
e
s
a
r
e
e
n
a
b
l
e
d
.**

- bandwidth
- addon_domains
- subdomains

PassengerApps:: disable_application

PassengerApps:: edit_application

PassengerApps:: enable_application

PassengerApps:: list_applications

PassengerApps:: register_application

PassengerApps:: unregister_application

▼ **PasswdStrength**

PasswdStrength:: get_required_strength

▼ **Personalization**

Personalization::set

Personalization::get

▼ **Postgresql**

Postgresql:: create_database

Postgresql:: create_user

Postgresql:: delete_database

Postgresql:: get_restrictions

Postgresql:: grant_all_privileges

Postgresql:: rename_database

Postgresql:: rename_user

Postgresql:: rename_user_no_password

Postgresql:: revoke_all_privileges

Postgresql:: set_password

▼ **Pushbullet**

Pushbullet:: send_test_message

▼ **Quota**

Quota:: get_quota_info

▼ **Resellers**

Resellers:: list_accounts

- aliases
- email_accounts
- mailing_lists

Note: This function is only returned if Mailman service is enabled. For more information, r

- ▼ ResourceUsage
 - ResourceUsage:: get_usages
- ▼ Restore
 - Restore:: directory_listing
 - Restore:: get_users
 - Restore:: query_file_info
 - Restore:: restore_file
- ▼ Session
 - Session:: create_temp_user
- ▼ SiteTemplates
 - SiteTemplates:: list_site_templates
 - SiteTemplates:: list_user_settings
 - SiteTemplates:: publish
- ▼ SpamAssassin
 - SpamAssassin :: clear_spam_box
 - SpamAssassin:: get_symbolic_test_names
 - SpamAssassin:: get_user_preferences
 - SpamAssassin:: update_user_preference
- ▼ SSH
 - SSH:: get_port
- ▼ SSL
 - SSL:: add_autossl_excluded_domains
 - SSL:: check_shared_cert
 - SSL:: delete_cert
 - SSL:: delete_csr
 - SSL:: delete_key
 - SSL:: delete_ssl
 - SSL :: disable_mail_sni
 - SSL:: enable_mail_sni
 - SSL:: fetch_best_for_domain

SSL:: fetch_cert_info

SSL:: fetch_certificates_for_fqdns

SSL:: fetch_key_and_cabundle_for_certificate

SSL:: find_certificates_for_key

SSL:: find_csrs_for_key

SSL:: generate_certificate

SSL:: generate_csr

SSL:: generate_key

SSL:: get_autossl_excluded_domains

SSL:: get_autossl_pending_queue

SSL:: get_autossl_problems

SSL:: get_cabundle

SSL:: get_cn_name

SSL:: install_ssl

SSL:: installed_hosts

SSL:: installed_hosts

SSL:: is_autossl_check_in_progress

SSL:: is_mail_sni_supported

SSL:: is_sni_supported

SSL:: list_certs

SSL:: list_csrs

SSL:: list_keys

SSL:: list_ssl_items

SSL:: mail_sni_status

SSL:: rebuild_mail_sni_config

SSL:: rebuildssldb

SSL:: remove_autossl_excluded_domains

n
.

- autoresponders
- forwarders
- email_filters
- ftp_accounts

Note: This function is only returned when this value is set to FTP accounts. See this section for more details.

- SSL:: set_autossl_excluded_domains
- SSL:: set_cert_friendly_name
- SSL:: set_csr_friendly_name
- SSL:: set_key_friendly_name
- SSL:: set_primary_ssl
- SSL:: set_ssl_share
- SSL:: show_cert
- SSL:: show_csr
- SSL:: show_key
- SSL:: start_autossl_check
- SSL:: upload_cert
- SSL:: upload_key
- StatsBar
 - StatsBar:: get_stats
- Styles
 - Styles:: current
 - Styles:: list
 - Styles:: set_default
 - Styles:: update
- SubDomain
 - SubDomain:: add_subdomain
- Themes
 - Themes:: get_theme_base
 - Themes:: list
 - Themes:: update
- TwoFactorAuth
 - TwoFactorAuth:: generate_user_configuration
 - TwoFactorAuth:: get_user_configuration
 - TwoFactorAuth:: remove_user_configuration
 - TwoFactorAuth:: set_user_configuration
- UserManager
 - UserManager:: check_account_conflic

- mysql_databases

N
o
t
e
:
T
h
i
s
f
u
n
c
t
i
o
n
o
n
l
y
r
e
t
u
r
n
s
t
h
i
s
v
a
l
u
e
i
f
M
y
S
Q
L
d
a
t
a
b
a
s
e
s
a
r
e
e
n
a
b
l
e
d
.

- postgresql_databases

- ts
- UserManager:: create_user
- UserManager:: delete_user
- UserManager:: dismiss_user
- UserManager:: edit_user
- UserManager:: list_users
- UserManager:: lookup_service_account
- UserManager:: lookup_user
- UserManager:: merge_service_account
- UserManager:: unlink_service_account
- ▼ UserTasks
 - UserTasks:: delete
 - UserTasks:: retrieve
- ▼ VersionControl
 - VersionControl:: create
 - VersionControl:: delete
 - VersionControl:: retrieve
 - VersionControl:: update
- ▼ VersionControlDeployment
 - VersionControlDeployment:: create
 - VersionControlDeployment:: delete
 - VersionControlDeployment:: retrieve
- ▼ WebDisk
 - WebDisk:: delete_user
 - WebDisk:: set_home_dir
 - WebDisk:: set_password
 - WebDisk:: set_permissions
- ▼ WebmailApps

maximum	integer	<p>The resource's maximum usage value.</p> <div style="border: 1px solid orange; padding: 5px; margin: 5px 0;"> <p>Note: This function returns an undefined value for an undefined (unlimited) quota.</p> </div> <p>This function returns this value in the data array of hashes.</p>	A non-negative integer value.	15
url	string	<p>The resource's defined URL link to its corresponding interface, in applicable.</p> <p>This function returns this value in the data array of hashes.</p>	A valid string.	sql/index.html
usage	integer	<p>The resource's current usage value.</p> <p>This function returns this value in the data array of hashes.</p>	A non-negative integer value.	0

WebmailApps:: list
webmailapps

▼ WebVhosts

WebVhost:: list_do
mains

WebVhost:: list_ssl
_capable_domains

▼ WordPressBackup

WordPressBackup
:: any_running

WordPressBackup
:: cancel

WordPressBackup
:: cleanup

WordPressBackup
:: get_available_ba
ckups

WordPressBackup
:: is_running

WordPressBackup
:: start

▼ WordPressInstance

Manager

WordPressInstanc
eManager:: cancel
_scan

WordPressInstanc
eManager:: cleanu
p_scan

WordPressInstanc
eManager:: chang
e_admin_passwor
d

WordPressInstanc
eManager:: config
ure_autoupdate

WordPressInstanc
eManager:: get_ap
i_version

WordPressInstanc
eManager:: get_in
stance_by_id

WordPressInstanc
eManager:: get_in
stances

WordPressInstanc
eManager:: get_lat
est_wordpress_ver
sion_from_wordpr
ess_org

WordPressInstanc
eManager:: get_sc
an_results

WordPressInstanc
eManager:: is_inst
allable_addon_ava
ilable

WordPressInstanc
eManager:: **start_s
can**

▼ **WordPressRestore**

WordPressRestore
:: **any_running**

WordPressRestore
:: **cleanup**

WordPressRestore
:: **start**