

WHM API 1 Functions - ea4_list_profiles

Guide to WHM API 1

- Return Data
- Filter Output
- Sort Output
- Paginate Output
- Output Columns
- Call cPanel API 2 and UAPI

Description

This function returns a list of all EasyApache 4 profiles and the packages each profile provides.

Note:
For more information, read our [EasyApache 4](#) documentation.

Important:
In cPanel & WHM version 76 and later, when you disable the `WebServerRole`, the system **disables** this function. For more information, read our [How to Use Server Profiles](#) documentation.

- Account Restoration
- restore_modules_summary
- restore_queue_activate
- restore_queue_add_task
- restore_queue_clear_all_completed_tasks
- restore_queue_clear_all_failed_tasks
- restore_queue_clear_all_pending_tasks
- restore_queue_clear_all_tasks
- restore_queue_clear_completed_task
- restore_queue_clear_pending_task
- restore_queue_is_active
- restore_queue_list_active
- restore_queue_list_completed
- restore_queue

Examples

JSON API

```
https://hostname.example.com:2087/cpsess#####/json-api/ea4_list_profiles?api.version=1
```

XML API

```
https://hostname.example.com:2087/cpsess#####/xml-api/ea4_list_profiles?api.version=1
```

Function information

About WHM API 1

WHM API 1 performs functions and accesses data in WHM.

Notes:

- Scro
- Ycmtus20 or20)tc

ue_list_pending
restore_queue_state
restoreaccount
verify_new_username_for_restore

Accounts

accountsummary
applist
createacct
domainuserdata
editquota
forcepasswordchange
get_domain_info
getdomainowner
has_digest_auth
has_mycnf_for_cpuser
limitbw
list_users
listaccts
listlockedaccounts
listsuspended
modifyacct
myprivs
passwd
removeacct
set_digest_auth
showbw
suspendacct
unsuspendacct
untrack_acct_id
verify_new_username

Addon Domains

Command Line

```
whmapil  
ea4_list_profiles
```

Notes:

- You **must** URI-encode values.
- For more information and additional output options, read our [Guide to WHM API 1](#) documentation or run the `whmapil --help` command.
- If you run CloudLinux™, you **must** use the full path of the `whmapil` command:

```
/usr/local  
/cpanel/bin/  
whmapil
```

Output (JSON)

```
{  
  "data" : {  
    "cpanel" : [  
      {  
        "version"  
      : "1.0",  
        "pkgs" :  
      [  
        "ea-apache24",  
        "ea-apache24-config",  
        ...  
      ],  
        "desc" :  
        "The currently  
        installed packages on  
        the server.",  
        "validation_data" : {  
        "not_on_server" : []  
        },  
        "name" :  
        "Current Profile",  
        "active"  
      : 1  
    },  
  ],  
}
```

Find a function

- WHM API 1 Functions - package_manager_resolve_actions — This function resolves the state of a set of Easy Apache 4 RPM packages.

convert_add
on_fetch_co
nversion_de
tails

convert_add
on_fetch_do
main_details

convert_add
on_get_con
version_stat
us

convert_add
on_initiate_c
onversion

convert_add
on_list_add
on_domains

convert_add
on_list_conv
ersions

▼ Authentication

api_token_c
reate

api_token_li
st

api_token_r
evoke

api_token_u
pdate

disable_aut
hentication_
provider

disable_fail
ing_authenti
cation_provi
ders

enable_auth
entication_p
rovider

get_availabl
e_authentic
ation_provi
ders

get_login_ur
l

get_provider
_client_confi
gurations

get_provider
_configurati
on_fields

get_provider
_display_co
nfigurations

get_users_a
uthn_linked
_accounts

```
{
  "version"
: "0.2",
  "tags" :
[
  "Apache 2.4",
    "PHP
7.0",
    "PHP
5.5",
    "PHP
5.6",
    "All
PHP Opts"
  ],
  "pkgs" :
[
  "ea-apache24",
  "ea-apr",
    ...
  ],
  "desc" :
  "This is the MPM
Worker cPanel profile
plus every PHP option
(sans recode and
zendguard due to
incompatibilities).
This package can host
multiple sites and
users.",
  "validation_data" : {
    "not_on_server" : []
  },
  "name" :
  "All PHP Options +
OpCache",
  "path" :
  "allphp-opcache.json"
},
{
  "name" :
  "All PHP Options +
ZendGuard",
  "validation_data" : {
    "not_on_server" : []
```

- WHM API 1 Sections - Easy Apache — Easy Apache functions allow you to manage your Easy Apache 4 settings.

- WHM API 1 Sections - PHP — PHP functions allow you to manage your system's PHP configuration.

link_user_authn_provider
 set_provider_client_configurations
 set_provider_display_configurations
 twofactorauth_disable_policy
 twofactorauth_enable_policy
 twofactorauth_generate_tfa_config
 twofactorauth_get_issue_r
 twofactorauth_get_user_configs
 twofactorauth_policy_status
 twofactorauth_remove_user_config
 twofactorauth_set_issuer
 twofactorauth_set_tfa_config
 unlink_user_authn_provider
 validate_login_token
 Backups
 backup_config_get
 backup_config_set
 backup_data_list
 backup_destination_add
 backup_destination_delete
 backup_destination_get
 backup_destination_list

```

    },
    "path" :
    "allphp.json",
    "version"
    : "0.2",
    "desc" :
    "This is the default
    cPanel profile plus
    every PHP option
    (sans recode and
    opcache due to
    incompatibilities).
    This package can host
    multiple sites and
    users.",
    "pkgs" :
    [
    "ea-apache24",
    "ea-apr",
    ...
    ],
    "tags" :
    [
    "Apache 2.4",
    "PHP
    7.0",
    "PHP
    5.5",
    "PHP
    5.6",
    "All
    PHP Opts"
    ]
  },
  {
    "path" :
    "default.json",
    "name" :
    "cPanel Default",
    "validation_data" : {
    "not_on_server" : []
    },
    "desc" :
    "This is the standard
    Apache package with
    up-to-date PHP and
    modules, including
    PHP-FPM. This package
  
```

- WHM API 1 Functions - php_get_installed_versions — This function returns the installed PHP versions on a server.

backup_destination_set
backup_destination_validate
backup_get_transport_status
backup_list_transported
backup_set_list
backup_skip_users_all
backup_skip_users_all_status
backup_user_list
convert_and_migrate_from_legacy_config
get_users_with_backup_metadata
list_cparchive_files
start_background_packagect
toggle_user_backup_state
▼ cPHulk
cphulk_statuses
create_cphulk_record
delete_cphulk_record
disable_cphulk
enable_cphulk
flush_cphulk_login_history
flush_cphulk_login_history_for_ips
get_countries_with_known_ip_ranges

```
can host multiple
sites and users.",
    "pkgs" :
[
    "ea-apache24",
    "ea-apr",
    ...
],
    "tags" :
[
    "Apache 2.4",
    "PHP
5.5",
    "PHP
5.6",
    "PHP
7.0"
    ],
    "version"
: "0.2"
    },
    {
    "tags" :
[
    "Apache 2.4",
    "PHP
7.0",
    "PHP
5.5",
    "PHP
5.6",
    "MPM
ITK"
    ],
    "desc" :
"This profile
includes the modules
from the Basic
profile but replaces
MPM Worker with MPM
ITK to further
increase security for
your server. MPM ITK
creates a more secure
environment than Mod
Ruid2, but uses more
resources.",
    "pkgs" :
[
```

```
get_cphulk_brutes
get_cphulk_excessive_brutes
get_cphulk_failed_logins
get_cphulk_user_brutes
load_cphulk_config
read_cphulk_records
save_cphulk_config
set_cphulk_config_key
```

▼ Databases

```
background_mysql_upgrade_status
current_mysql_version
installable_mysql_versions
latest_available_mysql_version
list_databases_users
list_databases
list_mysql_databases_and_users
remote_mysql_create_profile
remote_mysql_create_profile_via_ssh
remote_mysql_delete_profile
remote_mysql_initiate_profile_activation
remote_mysql_monitor_profile_activation
remote_mysql_read_prof
```

```
"ea-apache24",
"ea-apr",
    ],
    "version"
: "0.2",
    "path" :
"mpm_itk.json",
"validation_data" : {
"not_on_server" : []
},
    "name" :
"cPanel Default + MPM
ITK"
    },
    {
        "desc" :
"This Apache web
server is beneficial
for static content
and secure servers.
This server does not
use PHP support.",
        "pkgs" :
[
"ea-apache24",
"ea-apr",
"ea-apr-util",
"ea-apache24-mod_mpm_
worker",
"ea-apache24-mod_ssl",
,
"ea-apache24-mod_suex
ec",
"ea-apache24-mod_defl
ate",
"ea-apache24-mod_expi
res",
"ea-apache24-mod_head
ers",
```

| | |
|--------------------------------|--|
| ile | |
| remote_mysql_read_profiles | "ea-apache24-mod_proxy", |
| remote_mysql_update_profile | "ea-apache24-mod_cgid", |
| remote_mysql_validate_profile | "ea-apache24-mod_security2" |
| rename_mysql_database |], "tags" : |
| rename_mysql_user | ["Apache 2.4", "No |
| rename_postgresql_database | PHP" |
| rename_postgresql_user |], "version" |
| set_local_mysql_root_password | : "0.1", "path" : |
| set_mysql_password | "nophp.json", "name" : |
| set_postgresql_password | "No PHP", "validation_data" : { |
| start_background_mysql_upgrade | "not_on_server" : [] } }, { |
| ▼ DNS | "tags" : |
| adddns | [|
| addzonerecord | "Apache 2.4", "Ruby |
| addzonerecord (Reverse DNS) | 2.4", "Passenger 5.1" |
| dumpzone |], "pkgs" : |
| editzonerecord | [|
| get_nameserver_config | "ea-apache24", ... "desc" : |
| getzonerecord | "This profile installs standard Apache packages with mod_passenger and ea-ruby24. This profile enables the Application Manager interface in cPanel, |
| has_local_authority | |
| killdns | |
| listmxs | |
| listzones | |
| lookupnsip | |
| lookupnsips | |

```
removezone
record

resetzone

resolvedom
ainname

savemxs

setresolvers

update_nam
eservers_co
nfig
```

▼ EasyApache

```
ea4_get_cur
rently_install
ed_packages

ea4_get_ea
_pkgs_state

ea4_list_pro
files

ea4_migrati
on

ea4_pre_mi
grate_check

ea4_recom
mendations

ea4_save_p
rofile

ea4_tomcat
85_add

ea4_tomcat
85_list

ea4_tomcat
85_rem
```

▼ Greylisting

```
cpgreylist_is
_server_net
block_truste
d

cpgreylist_li
st_entries_f
or_common
_mail_provid
er

cpgreylist_lo
ad_common
_mail_provid
ers_config

cpgreylist_s
ave_commo
n_mail_provi
ders_config

cpgreylist_st
atus

cpgreylist_tr
ust_entries_
```

```
which allows users to
configure Ruby
applications to be
deployed via
mod_passenger.",
    "version"
: "0.3",
    "path" :
"rubypassenger.json",
"validation_data" : {
"not_on_server" : []
},
    "name" :
"Ruby via
mod_passenger"
},
{
    "path" :
"worker.json",
    "name" :
"cPanel Worker MPM",
"validation_data" : {
"not_on_server" : []
},
    "desc" :
"This profile uses
the worker MPM and
includes suexec,
suphp and
mod_security2 to
improve the security
of your server.",
    "pkgs" :
[
"ea-apache24",
    ""
],
    "tags" :
[
"Apache 2.4",
    "PHP
5.5",
    "PHP
5.6",
    "PHP
7.0"
],
```


for_common_mail_provider
cpgreylist_untrusted_entries_for_common_mail_provider
create_cpgreylist_trusted_host
delete_cpgreylist_trusted_host
disable_cpgreylist
enable_cpgreylist
load_cpgreylist_config
read_cpgreylist_deferred_entries
read_cpgreylist_trusted_host
save_cpgreylist_config

▼ Integration

batch
cpanel
create_integration_group
create_integration_link
get_integration_link_user_config
list_integration_groups
list_integration_links
remove_integration_group
remove_integration_link
update_integration_link_token

▼ IP Addresses

addips
delip
get_public_i

```
      "version"
    : "0.3"
      }
    ],
    "custom" : [
      {
        "path" :
"example.json",

"validation_data" : {

"not_on_server" : []
      },
        "name" :
"Example",
        "tags" :
[],
        "pkgs" :
[
"ea-apache24"
      ],
        "desc" :
"",
        "version"
    : "0.1"
      }
    ]
  },
  "metadata":{
    "reason":"OK",
    "result":1,
    "version":1,

"command":"ea4_list_p
```

p
get_shared_ip
ipv6_disable_account
ipv6_enable_account
ipv6_range_add
ipv6_range_edit
ipv6_range_list
ipv6_range_remove
ipv6_range_usage
listips
nat_checkip
nat_set_public_ip
setsiteip
▼ Mail
disable_dkim
disable_mail_sni
emailtrack_search
emailtrack_stats
emailtrack_user_stats
enable_dkim
enable_mail_sni
ensure_dkim_keys_exist
exim_configuration_check
expunge_mailbox_messages
expunge_messages_for_mailbox_guid
fetch_dkim_private_keys
fetch_mail_

```
rofiles"  
    }  
}
```

▼ Output (XML)

```
<result>  
  <data>  
    <cpanel>  
      <name>Current  
Profile</name>  
  
      <active>1</active>  
      <desc>The  
currently installed  
packages on the  
server.</desc>  
  
      <pkgs>ea-apache24</pk  
gs>  
  
      <pkgs>ea-apache24-con  
fig</pkgs>  
      ...  
  
      <validation_data>  
  
    </validation_data>  
  
    <version>1.0</version  
>  
      </cpanel>  
      <cpanel>  
        <name>All PHP  
Options +  
OpCache</name>  
        <desc>This is  
the MPM Worker cPanel  
profile plus every  
PHP option (sans  
recode and zendguard  
due to  
incompatibilities).  
This package can host  
multiple sites and  
users.</desc>  
  
        <path>allphp-opcache.  
json</path>  
  
      <pkgs>ea-apache24</pk
```

queue
generate_m
obileconfig
get_mailbox
_status
get_mailbox
_status_list
get_user_e
mail_forwar
d_destinatio
n
hold_outgoi
ng_email
install_dkim
_private_key
s
install_spf_r
ecords
is_sni_supp
orted
list_pops_for
mail_sni_sta
tus
rebuild_mail
_sni_config
release_out
going_email
save_spamd
_config
set_user_e
mail_forwar
d_destinatio
n
suspend_ou
tgoing_email
unsuspend_
outgoing_e
mail
validate_cur
rent_installe
d_exim_conf
ig
validate_cur
rent_dkims
validate_cur
rent_ptrs
validate_cur
rent_spfs
validate_exi
m_configura
tion_syntax
▼ Market
disable_mar
ket_provider

```
gs>  
<pkgs>ea-apr</pkgs>  
...  
  <tags>Apache  
2.4</tags>  
  <tags>PHP  
7.0</tags>  
  <tags>PHP  
5.5</tags>  
  <tags>PHP  
5.6</tags>  
  <tags>All PHP  
Opts</tags>  
<validation_data>  
</validation_data>  
<version>0.2</version  
>  
  </cpanel>  
  <cpanel>  
    <name>All PHP  
Options +  
ZendGuard</name>  
    <desc>This is  
the default cPanel  
profile plus every  
PHP option (sans  
recode and opcache  
due to  
incompatibilities).  
This package can host  
multiple sites and  
users.</desc>  
  <path>allphp.json</pa  
th>  
<pkgs>ea-apache24</pk  
gs>  
<pkgs>ea-apr</pkgs>  
...  
  <tags>Apache  
2.4</tags>  
  <tags>PHP  
7.0</tags>  
  <tags>PHP  
5.5</tags>  
  <tags>PHP  
5.6</tags>
```

enable_market_provider
get_adjusted_market_providers_products
get_market_providers_commission_config
get_market_providers_list
get_market_providers_product_metadata
get_market_providers_products
set_market_product_attribute
set_market_provider_commission_id

▼ ModSecurity™

modsec_added_rule
modsec_added_vendor
modsec_assemble_config_text
modsec_batch_settings
modsec_check_rule
modsec_clone_rule
modsec_deploy_all_rule_changes
modsec_deploy_rule_changes
modsec_deploy_settings_changes
modsec_disable_rule
modsec_disable_vendor
modsec_disable_vendor_configs

```
<tags>All PHP
Opts</tags>

<validation_data>

</validation_data>

<version>0.2</version
>
  </cpanel>
  <cpanel>
    <name>cPanel
Default</name>
    <desc>This is
the standard Apache
package with
up-to-date PHP and
modules, including
PHP-FPM. This package
can host multiple
sites and
users.</desc>

<path>default.json</p
ath>

<pkg>ea-apache24</pk
gs>

<pkg>ea-apr</pkg>

...
  <tags>Apache
2.4</tags>
  <tags>PHP
5.5</tags>
  <tags>PHP
5.6</tags>
  <tags>PHP
7.0</tags>

<validation_data>

</validation_data>

<version>0.2</version
>
  </cpanel>
  <cpanel>
    <name>cPanel
Default + MPM
ITK</name>
    <desc>This
profile includes the
```

modsec_disable_vendor_updates
modsec_disable_all_rule_changes
modsec_disable_rule_changes
modsec_edit_rule
modsec_enable_vendor
modsec_enable_vendor_configs
modsec_enable_vendor_updates
modsec_get_config_text
modsec_get_configs
modsec_get_configs_with_changes_pending
modsec_get_log
modsec_get_rules
modsec_get_settings
modsec_get_vendors
modsec_is_installed
modsec_make_config_active
modsec_make_config_inactive
modsec_preview_vendor
modsec_remove_rule
modsec_remove_setting
modsec_remove_vendor
modsec_report_rule

modules from the Basic profile but replaces MPM Worker with MPM ITK to further increase security for your server. MPM ITK creates a more secure environment than Mod Ruid2, but uses more resources.</desc>

<path>mpm_itk.json</path>

<pkgs>ea-apache24</pkgs>

<pkgs>ea-apr</pkgs>

...

<tags>Apache 2.4</tags>

<tags>PHP 7.0</tags>

<tags>PHP 5.5</tags>

<tags>PHP 5.6</tags>

<tags>MPM ITK</tags>

<validation_data>

</validation_data>

<version>0.2</version>

</cpanel>

<cpanel>

<name>No PHP</name>

<desc>This Apache web server is beneficial for static content and secure servers. This server does not use PHP support.</desc>

<path>nophp.json</path>

<pkgs>ea-apache24</pkgs>

| | |
|--|---|
| modsec_set _config_text | gs> |
| modsec_set _setting | <pkgs>ea-apr</pkgs> |
| modsec_un disable_rule | <pkgs>ea-apr-util</pkgs> |
| modsec_up date_vendor | gs> |
| modsec_up date_vendor | <pkgs>ea-apache24-mod _mpm_worker</pkgs> |
| ▼ Packages | |
| _getpkgexte n_sionform | <pkgs>ea-apache24-mod _ssl</pkgs> |
| add_overrid e_features_f or_user | <pkgs>ea-apache24-mod _suexec</pkgs> |
| addpkg | |
| addpkgext | <pkgs>ea-apache24-mod _deflate</pkgs> |
| changepack age | |
| create_featu relist | <pkgs>ea-apache24-mod _expires</pkgs> |
| delete_featu relist | |
| delpkgext | <pkgs>ea-apache24-mod _headers</pkgs> |
| editpkg | |
| get_availabl e_applicatio ns | <pkgs>ea-apache24-mod _proxy</pkgs> |
| get_availabl e_featurelist s | <pkgs>ea-apache24-mod _cgid</pkgs> |
| get_feature_ metadata | <pkgs>ea-apache24-mod _security2</pkgs> |
| get_feature_ names | <tags>Apache 2.4</tags> |
| get_featureli st_data | <tags>No PHP</tags> |
| get_featureli sts | <validation_data> |
| get_users_f eatures_sett ings | </validation_data> |
| getfeaturelis t | <version>0.1</version > |
| getpkginfo | </cpanel> |
| killpkg | <cpanel> |
| listpkgs | <name>Ruby via mod_passenger</name> |
| manage_fea tures | <desc>This profile installs standard Apache packages with mod_passenger and |
| matchpkgs | |
| read_feature list | |

remove_override_features_for_user
update_featurelist
verify_user_has_feature

▼ PHP

convert_all_domains_to_fpm
get_fpm_count_and_utilization
is_conversion_in_progress
php_get_default_accounts_to_fpm
php_get_handlers
php_get_impacted_domains
php_get_installed_versions
php_get_old_fpm_flag
php_get_system_default_version
php_get_versions_by_version
php_get_versions
php_ini_get_content
php_ini_get_directives
php_ini_set_content
php_ini_set_directives
php_set_default_accounts_to_fpm
php_set_handler
php_set_old_fpm_flag
php_set_session_save_p

ea-ruby24. This profile enables the Application Manager interface in cPanel, which allows users to configure Ruby applications to be deployed via mod_passenger.</desc>

```
<path>rubypassenger.json</path>
```

```
<pkgs>ea-apache24</pkgs>
```

...

```
<tags>Apache 2.4</tags>
```

```
<tags>Ruby 2.4</tags>
```

```
<tags>Passenger 5.1</tags>
```

```
<validation_data>
```

```
</validation_data>
```

```
<version>0.3</version>
```

```
</cpanel>
```

```
<cpanel>
```

```
<name>cPanel
```

```
Worker MPM</name>
```

```
<desc>This
```

```
profile uses the worker MPM and
```

```
includes suexec, suphp and
```

```
mod_security2 to improve the security
```

```
of your
```

```
server.</desc>
```

```
<path>worker.json</path>
```

```
<pkgs>ea-apache24</pkgs>
```

...

```
<tags>Apache 2.4</tags>
```

| | |
|--|--------------------------------------|
| ath | <tags>PHP |
| php_set_sys tem_default _version | 5.5</tags> <tags>PHP |
| php_set_vh ost_versions | 5.6</tags> <tags>PHP |
| 7.0</tags> | |
| ▼ Resellers | |
| acccounts | <validation_data> |
| get_public_c ontact | </validation_data> |
| getresellerip s | <version>0.3</version > |
| listaccls | </cpanel> |
| listresellers | <custom> |
| resellerstats | |
| saveacllist | <name>Test</name> <desc></desc> |
| set_public_c ontact | <path> foo bar.json</path> |
| setaccls | |
| setresellerip s | <pkgs>ea-apache24</pk gs> |
| setresellerli mits | <validation_data> |
| setresellerm ainip | </validation_data> |
| setresellern ameservers | <version>0.1</version > |
| setresellerp ackagelimit | </custom> |
| setupreselle r | </data> <metadata> |
| suspendres eller | <result>1</result> |
| terminateres eller | <version>1</version> |
| unsetuprese ller | <reason>OK</reason> |
| unsuspendr eseller | <command>ea4_list_pkg s</command> |
| ▼ RPM | |
| delete_rpm_ version | |
| edit_rpm_ve rsion | |
| get_rpm_ver sion_data | |
| install_rpm_ plugin | |
| list_rpms | |
| package_m | |

anager_fixache

package_manager_get_build_log

package_manager_get_package_info

package_manager_is_performing_actions

package_manager_list_packages

package_manager_resolve_actions

package_manager_submit_actions

package_manager_upgrade

uninstall_rpm_plugin

Script Hooks

delete_hook

edit_hook

list_hooks

reorder_hooks

Security

accessssh

authorizesshkey

check_remote_ssh_connection

convertopenssh_tputty

deletesshkey

generatesshkeypair

importsshkey


listsshkeys

Server

Administration

add_configuserserver

configureba

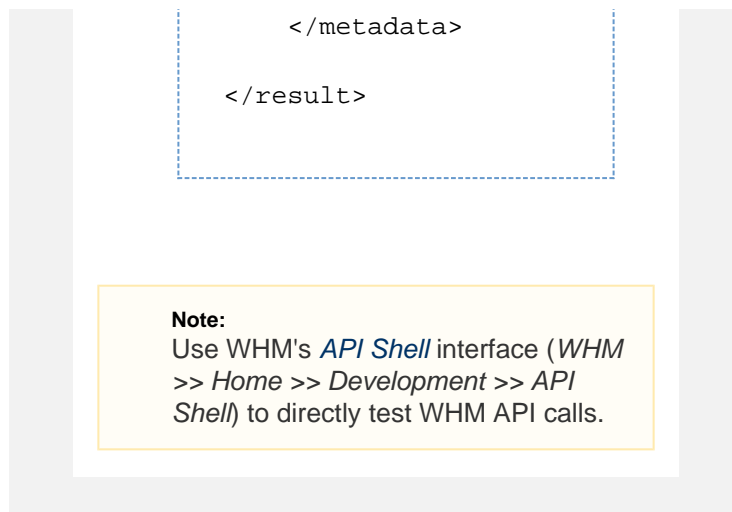

Parameters

This function does not accept parameters.

Returns

| Return | Type | Description | Possible values | Example |
|--------|-----------------|---------------------------------------|---|---------|
| cpanel | array of hashes | An array of cPanel's settings hashes. | This array of hashes includes the version, desc, name, path, pkgs, active, tags, and validation_data returns. | |

| | | | | | |
|--|--------------------|-------------------------------|---|--|--------------------|
| <p>ckgroundprocesskiller</p> <p>configureserver</p> <p>cors_proxy_get</p> <p>create_user_session</p> <p>delete_configclusterserver</p> <p>enable_monitor_all_enabled_services</p> <p>get_all_contact_importances</p> <p>get_appconfig_application_list</p> <p>get_application_contact_event_importance</p> <p>get_application_contact_importance</p> <p>get_available_profiles</p> | <p>custom</p> | <p><i>array of hashes</i></p> | <p>An array of custom settings hashes.</p> <div data-bbox="734 226 873 1033" style="border: 1px solid black; padding: 5px;"> <p>Note : This function returns the custom override name arrays when the server administrator or a third-party vendor creates the profile.</p> </div> | <p>This array of hashes includes the version, desc, name, path, pkgs, tags, and validation_data returns.</p> | |
| <p>get_current_profile</p> <p>get_password_strength</p> <p>get_remote_access_hash</p> <p>get_service_config</p> <p>get_service_config_key</p> <p>get_tweaksetting</p> <p>get_update_availability</p> <p>get_users_links</p> <p>getdiskusage</p> <p>gethostname</p> <p>is_role_enabled</p> <p>list_configclusterservers</p> | <p>vendor_name</p> | <p><i>array of hashes</i></p> | <p>An array of vendor settings hashes.</p> <p>In this return, vendor_name is a vendor's name.</p> <div data-bbox="734 1276 873 1967" style="border: 1px solid black; padding: 5px;"> <p>Note : • This function returns the custom</p> </div> | <p>This array of hashes includes the version, desc, name, path, pkgs, tags, and validation_data returns.</p> | <p>ExampleHost</p> |

loadavg
nvget
nvset
personalization_get
personalization_set
purchase_a_license
reboot
remove_in_progress_exim_config_edit
restartservice
restore_config_from_file
restore_config_from_upload
run_cpkeyctl
send_test_posturl
send_test_pushbullet_note
servicestatus
set_application_contact_event_importance
set_application_contact_importance
set_primary_servername
set_service_config_key
set_tweaksetting
sethostname
setminimumpasswordstrengths
start_profile_activation
system_needs_reboot
systemloada

m
o
r
v
e
n
d
o
r
_
n
a
m
e
a
r
r
a
y
s
w
h
e
n
t
h
e
s
e
r
v
e
r
a
d
m
i
n
i
s
t
r
a
t
o
r
o
r
a
t
h
i
r
d
-
p
a
r
t
y
v
e
n
d
o
r
c
r
e
a
t
e
s
t
h
e
p
r
o

vg
update_conf
igclusterserv
er
update_cont
act_email
verify_aim_a
ccess
verify_icq_a
ccess
verify_oscar
_access
verify_postu
rl_access
verify_pushb
ullet_access

▼ SSL

disable_aut
ossl
fetch_servic
e_ssl_comp
onents
fetch_ssl_ce
rtificates_for
_fqdns
fetch_ssl_vh
osts
fetch_vhost
_ssl_compo
nents
fetchcrtinfo
fetchsslinfo
generatessl
get_autossl
_check_sch
edule
get_autossl
_log
get_autossl
_logs_catalo
g
get_autossl
_metadata
get_autossl
_pending_q
ueue
get_autossl
_pending_q
ueue_for_do
main
get_autossl
_pending_q
ueue_for_us
er

f
i
l

get_autossl_problems_for_domain
get_autossl_problems_for_user
get_autossl_providers
get_best_ssl_domain_for_service
install_service_ssl_certificate
installssl
listcrts
rebuildinstall_edssldb
rebuildusers_sldb
reset_autossl_provider
reset_service_ssl_certificate
set_autossl_metadata
set_autossl_metadata_key
set_autossl_provider
start_autossl_check_for_all_users
start_autossl_check_for_one_user

▼ Styles and Themes

generate_control_plugin
list_styles
load_style
remove_log
remove_style
save_style
set_default

▼ Support Tickets

ticket_create_stub_ticket

• The vendor — name hash may contain multiple IP addresses. This system can install multiple IP

ticket_get_s
upport_agre
ement

ticket_get_s
upport_info

ticket_grant

ticket_list

ticket_remov
e_closed

ticket_revok
e

ticket_ssh_t
est

ticket_ssh_t
est_start

ticket_updat
e_service_a
greement_a
pproval

ticket_valida
te_oauth2_c
ode

ticket_whitel
ist_check

ticket_whitel
ist_setup

ticket_whitel
ist_unsetup

▼ Transfers

abort_transf
er_session

analyze_tra
nsfer_sessio
n_remote

available_tr
ansfer_mod
ules

create_remo
te_root_tran
sfer_session

create_remo
te_user_tran
sfer_session

delete_accou
nt_archives

enqueue_tra
nsfer_item

fetch_transf
er_session_l
og

get_transfer
_session_st
ate

pause_trans
fer_session

o
r

remote_basi
c_credential
_check

retrieve_tran
sfer_session
_remote_an
alysis

start_transfe
r_session

transfer_mo
dule_schem
a

validate_sys
tem_user

▼ Updates

accept_eula

get_avaiabl
e_tiers

get_current_
lts_expiratio
n_status

get_lts_wex
pire

getlongterm
support

installed_ver
sions

set_cpanel_
updates

set_tier

update_upd
ateconf

version

| | | | | |
|---------|---------|---|---|---|
| | | | S | |
| active | Boolean | Whether the cPanel profile's settings are active. The function returns this value in the hashes of the cpanel array of hashes. | <ul style="list-style-type: none">1 — Active.0 — Inactive. | 1 |
| version | string | The profile's current version ID. The function returns this value in the hashes of the cpanel, custom, or vendor_name array of hashes. | A version ID. | 1.2 |
| desc | string | A description of the profile. The function returns this value in the hashes of the cpanel, custom, or vendor_name array of hashes. | A description. | The currently installed packages on the server. |
| name | string | The profile name. The function returns this value in the hashes of the cpanel, custom, or vendor_name array of hashes. | A profile name. | No PHP |
| path | string | The file name of the profile. The function returns this value in the hashes of the cpanel, custom, or vendor_name array of hashes. | A system path. | default.json |
| pkgs | array | The RPM packages included in the profile. The function returns this value in the hashes of the cpanel, custom, or vendor_name array of hashes. | An array of RPM packages. | ea-apache24 |

| | | | | |
|-----------------|--------------|--|---------------------------------------|------------|
| tags | <i>array</i> | <p>Labels that highlight key attributes of a profile.</p> <p>The function returns this value in the hashes of the <code>cpanel</code>, <code>custom</code>, or <code>vendor_name</code> array of hashes.</p> | An array of profile labels. | Apache 2.4 |
| validation_data | <i>array</i> | <p>The packages not installed on the server.</p> <p>The function returns this value in the hashes of the <code>cpanel</code>, <code>custom</code>, or <code>vendor_name</code> array of hashes.</p> | An array of uninstalled RPM packages. | [] |