

WHM API 1 Functions - get_autossl_logs_catalog

Guide to WHM API 1

- Return Data
- Filter Output
- Sort Output
- Paginate Output
- Output Columns
- Use WHM API to Call cPanel API & UAPI

- Accounts accounts ummary
- applist
- createacct
- domainuser data
- editquota
- forcepasswordchange
- has_digest_auth
- has_mycnf_for_cpuser
- limitbw
- listaccts
- listlockedaccounts
- listsuspended
- modifyacct
- myprivs
- passwd
- removeacct
- set_digest_auth
- showbw
- suspendacct
- unsuspendacct
- untrack_acct

Description

This function lists the AutoSSL feature's log files.

Examples

JSON API

```
https://hostname.example.com:2087/cpsess#####/json-api/get_autossl_logs_catalog?api.version=1
```

XML API

```
https://hostname.example.com:2087/cpsess#####/xml-api/get_autossl_logs_catalog?api.version=1
```

Command Line

```
whmapil get_autossl_logs_catalog
```

Notes:

- You **must** URI-encode values.
- For more information and additional output options, read our [Guide to WHM API 1](#) documentation or run the `whmapil --help` command.
- We introduced this functionality in cPanel & WHM version 11.52.0.8.

Output (JSON)

```
{  "data": {    "payload": [      {        "in_progress": 1,        "provider": "cPanel",        "start_time": "2016-06"
```

Function information

About WHM API 1

WHM API 1 performs functions and accesses data in WHM.

Notes:

- Sc
- ro
- us
- Yc
- mi
- us
- 20
- or
- 20
-) t

_id
 verify_new_username
 Account
 Restoration
 restore_modules_summary
 restore_queue_activate
 restore_queue_add_tasks
 restore_queue_clear_all_completed_tasks
 restore_queue_clear_all_failed_tasks
 restore_queue_clear_all_pending_tasks
 restore_queue_clear_all_tasks
 restore_queue_clear_completed_tasks
 restore_queue_clear_pending_task
 restore_queue_is_active
 restore_queue_list_active
 restore_queue_list_completed
 restore_queue_list_pending
 restore_queue_state
 restoreaccount
 verify_new_username_for_restore.
 Addon Domains
 convert_addon_fetch_conversion_de

```

-09T13:58:13Z",
  "username": "username"
    },
    {
      "in_progress": 1,
      "provider": "cPanel",
      "start_time": "2016-06-09T13:59:04Z",
      "username": "username"
        },
        {
          "in_progress": 1,
          "provider": "cPanel",
          "start_time": "2016-06-09T14:10:01Z",
          "username": "username"
            },
            {
              "in_progress": 1,
              "provider": "cPanel",
              "start_time": "2016-06-09T14:25:37Z",
              "username": "username"
                }
          ]
        },
        {
          "metadata": {
            "reason": "OK",
            "command": "get_autoss_l_logs_catalog",
            "result": 1,
  
```

Find a function

- WHM API 1 Functions - listcerts — This function lists the server's domains with installed SSL certificates.
- WHM API 1 Functions - delete_ssh_key — This function deletes an SSH key from the server.

tails
convert_add
on_fetch_do
main_details

convert_add
on_get_con
version_stat
us

convert_add
on_initiate_c
onversion

convert_add
on_list_add
on_domains

convert_add
on_list_conv
ersions

▼ Authentication

api_token_c
reate

api_token_li
st

api_token_r
evoke

api_token_u
pdate

disable_aut
hentication_
provider

disable_fail
ing_authenti
cation_provi
ders

enable_auth
entication_p
rovider

link_user_au
thn_provider

get_availabl
e_authentic
ation_provi
ders

get_login_ur
l

get_provider
_client_confi
gurations

get_provider
_configurati
on_fields

get_provider
_display_co
nfigurations

get_users_a
uthn_linked
_accounts

```
    "version":1  
  }  
}
```

▼ Output (XML)

```
<result>  
  <data>  
    <payload>  
  
    <in_progress>1</in_pr  
ogress>  
  
    <provider>cPanel</pro  
vider>  
  
    <start_time>2016-06-0  
9T13:58:13Z</start_ti  
me>  
  
    <username>username</u  
sername>  
    </payload>  
    <payload>  
  
    <in_progress>1</in_pr  
ogress>  
  
    <provider>cPanel</pro  
vider>  
  
    <start_time>2016-06-0  
9T13:59:04Z</start_ti  
me>  
  
    <username>username</u  
sername>  
    </payload>  
    <payload>  
  
    <in_progress>1</in_pr  
ogress>  
  
    <provider>cPanel</pro  
vider>  
  
    <start_time>2016-06-0  
9T14:10:01Z</start_ti  
me>  
  
    <username>username</u
```

- WHM API 1 Functions - authorize_sshkey — This function authorizes a key to access the server via SSH.
- WHM API 1 Functions - check_remote_ssh_connection — This function tests an SSH connection to another server.

set_provider
_client_conf
igurations

set_provider
_display_co
nfigurations

twofactoraut
h_disable_p
olicy

twofactoraut
h_enable_p
olicy

twofactoraut
h_generate_
tfa_config

twofactoraut
h_get_issue
r

twofactoraut
h_get_user_
configs

twofactoraut
h_policy_sta
tus

twofactoraut
h_remove_u
ser_config

twofactoraut
h_set_issuer

twofactoraut
h_set_tfa_c
onfig

unlink_user_
authn_provi
der

validate_logi
n_token

▼ Backups

backup_conf
ig_get

backup_conf
ig_set

backup_dat
e_list

backup_dest
ination_add

backup_dest
ination_dele
te

backup_dest
ination_get

backup_dest
ination_list

backup_dest
ination_set

```
sername>
  </payload>
  <payload>

<in_progress>1</in_pr
ogress>


<provider>cPanel</pro
vider>

<start_time>2016-06-0
9T14:25:37Z</start_ti
me>

<username>username</u
sername>
  </payload>
</data>
<metadata>
  <reason>OK</reason>

<command>get_autossl_
logs_catalog</command
>
  <result>1</result>
```

[backup_destination_validate](#)
[backup_set_list](#)
[backup_skip_users_all](#)
[backup_skip_users_all_status](#)
[backup_user_list](#)
[convert_and_migrate_from_legacy_config](#)
[list_cparchive_files](#)
[start_background_pkgacct](#)
[toggle_user_backup_status](#)

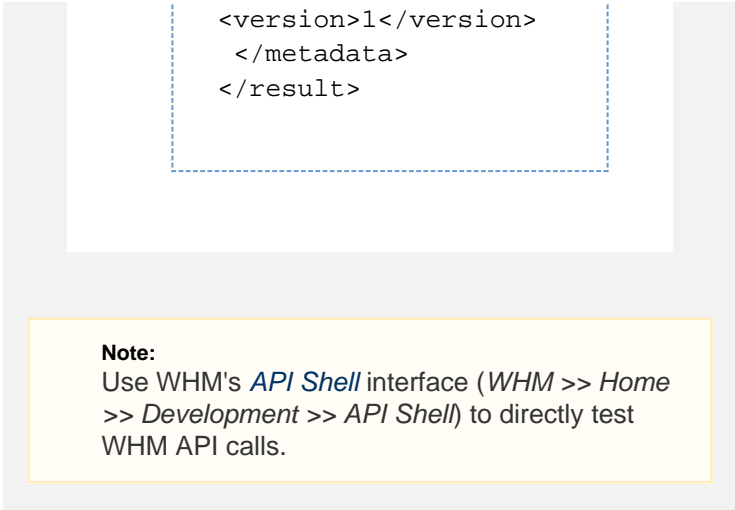

▼ cPHulk

[cphulk_statuses](#)
[create_cphulk_record](#)
[delete_cphulk_record](#)
[disable_cphulk](#)
[enable_cphulk](#)
[flush_cphulk_login_history](#)
[flush_cphulk_login_history_for_ips](#)
[get_cphulk_brutes](#)
[get_cphulk_excessive_brutes](#)
[get_cphulk_failed_logins](#)
[load_cphulk_config](#)
[read_cphulk_records](#)
[save_cphulk_config](#)

Parameters

This function does not accept parameters.

Returns

Return	Type	Description	Possible values	Example
payload	array of hashes	An array of hashes that contains information about an AutoSSL log file.	This array of hashes includes the <code>in_progress</code> , <code>provider</code> , <code>start_time</code> , and <code>username</code> returns.	
<code>in_progress</code>	Boolean	Whether AutoSSL is in progress. The function returns this value in the <code>payload</code> array of hashes.	<ul style="list-style-type: none"> 1 — AutoSSL is in progress. 0 — AutoSSL is not in progress. 	1
<code>provider</code>	string	The AutoSSL provider's name. The function returns this value in the <code>payload</code> array of hashes.	A valid AutoSSL provider's name. For example: <ul style="list-style-type: none"> cPanel LetsEncrypt 	cPanel
<code>start_time</code>	string	When the system created the log file. The function returns this value in the <code>payload</code> array of hashes.	A time value, in ISO-8601 format.	2016-06-09T14:25:37Z

▼ Databases

- background_mysql_upgrade_status
- current_mysql_version
- installable_mysql_versions
- latest_available_mysql_version
- list_database_users
- list_databases
- list_mysql_databases_and_users
- remote_mysql_create_profile
- remote_mysql_create_profile_via_ssh
- remote_mysql_delete_profile
- remote_mysql_initiate_profile_activation
- remote_mysql_monitor_profile_activation
- remote_mysql_read_profile
- remote_mysql_read_profiles
- remote_mysql_update_profile
- remote_mysql_validate_profile
- rename_mysql_database
- rename_mysql_user
- rename_postgresql_database

username	<i>string</i>	The user associated with the AutoSSL log entry.	The username of a cPanel user that the account owns.	username
		The function returns this value in the <code>payload</code> array of hashes.	* — Applies to all users.	

rename_pos
tgresql_user

set_local_m
ysql_root_p
assword

set_mysql_p
assword

set_postgre
sql_passwor
d

start_backgr
ound_mysql
_upgrade

▼ DNS

adddns

addzonerec
ord

addzonerec
ord
(Reverse
DNS)

dumpzone

editzonerec
ord

get_nameese
rver_config

getzonereco
rd

killdns

listmxs

listzones

lookupnsip

lookupnsips

removezone
record

resetzone

resolvedom
ainname

savemxs

setresolvers

▼ EasyApache

ea4_get_cur
rently_install
ed_packages

ea4_get_ea
_pkgs_state

ea4_list_pro
files

ea4_pre_mi
grate_check

ea4_recom
mendations

ea4_save_p
rofile

▼ Greylisting

cpgreylist_is
_server_net
block_truste
d

cpgreylist_li
st_entries_f
or_common
_mail_provid
er

cpgreylist_lo
ad_common
_mail_provid
ers_config

cpgreylist_s
ave_commo
n_mail_provi
ders_config

cpgreylist_st
atus

cpgreylist_tr
ust_entries_
for_common
_mail_provid
er

cpgreylist_u
ntrust_entrie
s_for_comm
on_mail_pro
vider

create_cpgr
eylist_truste
d_host

delete_cpgr
eylist_truste
d_host

disable_cpgr
eylist

enable_cpgr
eylist

load_cpgrey
list_config

read_cpgrey
list_deferred
_entries

read_cpgrey
list_trusted_
host

save_cpgrey
list_config

▼ Integration

batch

cpanel

create_integration_group

create_integration_link

get_integration_link_user_config

list_integration_groups

list_integration_links

remove_integration_group

remove_integration_link

update_integration_link_token

▼ IP Addresses

addips

delip

get_public_ip

get_shared_ip

ipv6_disable_account

ipv6_enable_account

ipv6_range_add

ipv6_range_edit

ipv6_range_list

ipv6_range_remove

ipv6_range_usage

listips

nat_checkip

nat_set_public_ip

setsiteip

▼ Mail

disable_mail_sni

emailtrack_search

emailtrack_stats

emailtrack_u
ser_stats

enable_mail
_sni

exim_config
uration_che
ck

expunge_m
ailbox_mess
ages

expunge_m
essages_for
_mailbox_gu
id

fetch_mail_
queue

generate_m
obileconfig

get_mailbox
_status

get_mailbox
_status_list

get_user_e
mail_forwar
d_destinatio
n

hold_outgoi
ng_email

is_sni_supp
orted

list_pops_for

mail_sni_sta
tus

rebuild_mail
_sni_config

release_out
going_email

save_spamd
_config

set_user_e
mail_forwar
d_destinatio
n

suspend_ou
tgoing_email

unsuspend_
outgoing_e
mail

validate_cur
rent_installe
d_exim_conf
ig

validate_exi
m_configura
tion_syntax

▼ Market

disable_market_provider

enable_market_provider

get_adjusted_market_providers_products

get_market_providers_commission_config

get_market_providers_list

get_market_providers_product_metadata

get_market_providers_products

set_market_product_attribute

set_market_provider_commission_id

▼ ModSecurity™

modsec_add_rule

modsec_add_vendor

modsec_batch_settings

modsec_clone_rule

modsec_deploy_all_rule_changes

modsec_deploy_rule_changes

modsec_deploy_settings_changes

modsec_discard_rule_changes

modsec_disable_rule

modsec_disable_vendor

modsec_disable_vendor_configs

modsec_disable_vendor_updates

modsec_disable_all_rule_changes

modsec_edit_rule

modsec_enable_vendor

modsec_enable_vendor_configs

modsec_enable_vendor_updates

modsec_get_config_text

modsec_get_configs

modsec_get_configs_with_changes_pending

modsec_get_log

modsec_get_rules

modsec_get_settings

modsec_get_vendors

modsec_is_installed

modsec_make_config_active

modsec_make_config_inactive

modsec_preview_vendor

modsec_remove_rule

modsec_remove_setting

modsec_remove_vendor

modsec_report_rule

modsec_set_config_text

modsec_set
_setting

modsec_un
disable_rule

modsec_up
date_vendor

▼ Packages

_getpkgexte
nsionform

add_overrid
e_features_f
or_user

addpkg

addpkgext

changepack
age

create_featu
relist

delete_featu
relist

delpkgext

editpkg

get_availabl
e_featurelist
s

get_feature_
metadata

get_feature_
names

get_featureli
st_data

get_users_f
eatures_sett
ings

getfeaturelis
t

getpkginfo

killpkg

listpkgs

manage_fea
tures

matchpkgs

package_m
anager_fixc
ache

package_m
anager_get_
package_inf
o

package_m
anager_reso
lve_actions

read_feature
list

remove_override_feature
s_for_user

update_featurelist

verify_user_has_feature

▼ PHP

php_get_handlers

php_get_impacted_domains

php_get_installed_versions

php_get_system_default_version

php_get_versions_by_version

php_get_versions

php_ini_get_content

php_ini_get_directives

php_ini_set_content

php_ini_set_directives

php_set_handler

php_set_system_default_version

php_set_versions

php_set_old_fpm_flag

php_get_old_fpm_flag

get_fpm_count_and_utilization

php_get_default_accounts_to_fpm

php_set_default_accounts_to_fpm

convert_all_domains_to_fpm

▼ Public Contact

get_public_contact

set_public_contact

▼ Resellers

acctcounts

getresellers

listacts

listresellers

resellerstats

saveacllist

setacts

setresellers

setresellerlimits

setresellermainip

setresellernameservers

setresellerpackagelimit

setupreseller

suspendreseller

terminatereseller

unsetupreseller

unsuspendreseller

▼ Script Hooks

delete_hook

edit_hook

list_hooks

reorder_hooks

▼ Security

accesshash

authorizesshkey

check_remote_ssh_connection

convertopen
sshtoputty

deletesshke
y

generatessh
keypair

importsshke
y

listsshkeys

▼ Server

Administration

add_configcl
usterserver

configureba
ckgroundpro
cesskiller

configureser
vice

cors_proxy_
get

create_user
_session

delete_confi
gclusterserv
er

delete_rpm_
version

edit_rpm_ve
rsion

enable_mon
itor_all_ena
bled_service
s

get_appconf
ig_applicatio
n_list

get_applicati
on_contact_
event_import
tance

get_applicati
on_contact_
importance

get_all_cont
act_importa
nces

get_passwor
d_strength

get_remote_
access_has
h

get_rpm_ver
sion_data

get_service_
config

get_service_
config_key

get_update_
availability

get_tweakse
tting

get_users_
links

getdiskusag
e

gethostnam
e

install_rpm_
plugin

list_configcl
usterservers

list_rpms

loadavg

nvget

nvset

purchase_a
_license

reboot

remove_in_
progress_ex
im_config_e
dit

restartservic
e

run_cpkeyclt

send_test_p
osturl

send_test_p
ushbullet_n
ote

servicestatu
s

set_applicati
on_contact_
event_impor
tance

set_applicati
on_contact_
importance

set_primary_
_servername
e

set_service_
config_key

set_tweakse
tting

sethostname

e

setminimum
passwordstr
engths

systemloada
vg

system_nee
ds_reboot

uninstall_rp
m_plugin

update_conf
igclusterserv
er

verify_aim_a
ccess

verify_icq_a
ccess

verify_oscar
_access

verify_postu
rl_access

verify_pushb
ullet_access

▼ SSL

disable_aut
ossl

fetch_servic
e_ssl_comp
onents

fetch_ssl_ce
rtificates_for
_fqdns

fetch_ssl_vh
osts

fetch_vhost
_ssl_compo
nents

fetchcrtinfo

fetchsslinfo

generatessl

get_autoss
l_check_sch
edule

get_autoss
l_log

get_autoss
l_logs_catalo
g

get_autoss
l_pending_q
ueue

get_autoss
l_pending_q
ueue_for_do

main

get_autoss
pending
queue_for_
user

get_autoss
problems
for_domain

get_autoss
problems
for_user

get_autoss
_providers

get_best_ssl
domain_for_
service

install_servi
ce_ssl_certif
icate

installssl

listcerts

rebuildinstall
edssldb

rebuildusers
sldb

reset_autos
ssl_provider

reset_servic
e_ssl_certifi
cate

set_autoss_
metadata

set_autoss_
provider

start_autoss
_check_for_
all_users

start_autoss
_check_for_
one_user

▼ Styles and Themes

list_styles

load_style

remove_log
o

remove_styl
e

save_style

set_default

▼ Support Tickets

ticket_creat
e_stub_ticke
t

ticket_get_
support_agr
reement

ticket_grant

ticket_list

ticket_remov
e_closed

ticket_revok
e

ticket_ssh_t
est

ticket_ssh_t
est_start

ticket_updat
e_service_a
greement_a
pproval

ticket_valida
te_oauth2_c
ode

ticket_whitel
ist_check

ticket_whitel
ist_setup

ticket_whitel
ist_unsetup

▼ Transfers

abort_transf
er_session

analyze_tra
nsfer_sessio
n_remote

available_tr
ansfer_mod
ules

create_remo
te_root_tran
sfer_session

create_remo
te_user_tran
sfer_session

enqueue_tra
nsfer_item

fetch_transf
er_session_l
og

get_transfer
_session_st
ate

pause_trans
fer_session

remote_basi
c_credential
_check

retrieve_tran

sfer_session
_remote_an
alysis

start_transfe
r_session

transfer_mo
dule_schem
a

validate_sys
tem_user

▼ Updates

get_availabl
e_tiers

get_current_
lts_expiratio
n_status

get_lts_wex
pire

getlongterm
support

installed_ver
sions

set_cpanel_
updates

set_tier

update_upd
ateconf

version