

cPanel API 1 Functions - Serverinfo::servicestatus

Guide to cPanel API 1

Return Data

cPanel Tags
(deprecated)

Bandwidth:
displaybandwidth

er

Bandwidth: displaybandwidth

Bandwidth: displaybandwidth

Bandwidth: displaybandwidth

▼ BoxTrapper

BoxTrapper: changestatus

BoxTrapper: cleanconfigfilelist

BoxTrapper: editmessage

BoxTrapper: fetchconfigfile

BoxTrapper: getboxconfdir

BoxTrapper: listmessages

BoxTrapper: logcontrols

BoxTrapper: messageaction

BoxTrapper: multi-messageaction

BoxTrapper: resetmessage

BoxTrapper: saveconfigfile

BoxTrapper: saveconfig

BoxTrapper: showautowhitelist

BoxTrapper: showemails

BoxTrapper: showfromname

BoxTrapper: showlog

Description

This function displays the status of services that the `chkserverd` daemon monitors.

Warning:
cPanel API 1 is **deprecated**. We **strongly** recommend that you **do not use** cPanel API 1. However, no equivalent function exists in our newer APIs.

Important:
In cPanel & WHM version 76 and later, when you disable the `WebServerRole`, the system **disables** this function. For more information, read our [How to Use Server Profiles](#) documentation.

Examples

▼ LiveAPI PHP Class

```
$cpanel = new  
CPANEL(); // Connect  
to cPanel - only do  
this once.  
$list_servicestatus =  
$cpanel->apil('Server  
info','servicestatus'  
); // Call the  
function.
```

Note:
For more information, read our [Guide to the LiveAPI System](#).

Function information

About this module

The `Serverinfo` module displays the status of services on your server.

About cPanel API 1

cPanel API 1 accesses information about cPanel accounts.

BoxTrapper:: show message
BoxTrapper:: show queue
BoxTrapper:: show queuesearch
BoxTrapper:: show queuetime
BoxTrapper:: status
BoxTrapper:: statusbutton

Branding

Branding:: file
Branding:: image
Branding:: killing
Branding:: setbrandingpkg
Branding:: setmyacctspkg
Branding:: setupdirs
Branding:: tempsetbrandingpkg

Cgi

Cgi:: backuplink
Cgi:: displayurchin
Cgi:: phpmyadminlink

Chkserverd

Chkserverd:: getximport
Chkserverd:: getximport_ssl

ClamScanner

ClamScanner:: bars

cPAddons

cPAddons:: mainpg

Cron

Cron:: crontab_perms

CustInfo

CustInfo:: getemail

Denylp

Denylp:: adddenyip
Denylp:: deldenyip
Denylp:: listdenyips

LiveAPI Perl Module

```
my $cpliveapi =  
Cpanel::LiveAPI->new(  
); # Connect to  
cPanel - only do this  
once.  
my  
$list_servicestatus =  
$cpliveapi->apil('Serverinfo', 'servicestatus'); # Call the  
function.
```

Note:

For more information, read our [Guide to the LiveAPI System](#).

cPanel Tag System (deprecated)

Warning:

In cPanel & WHM version 11.30 and later, cPanel tags are **deprecated**. We provide this example to help developers move from the old cPanel tag system to our [LiveAPI](#) system. We **strongly** recommend that you **only** use the [LiveAPI](#) system to call the cPanel APIs.

```
<cpanel  
Module="Serverinfo::servicestatus(">
```

Warning:
cPanel API deprecated. We **strongly** recommend cPanel API or UAPI instead.

Notes:

- The
- Ur
- mi
- us
- 20
- or
- 20
-)
- 20
- or
- 20
-)

Find
a
function

▼ DiskUsage

DiskUsage:: show manager

▼ Email

Email:: addautoresponder

Email:: addforward

Email:: addfilter

Email:: addlist

Email:: addmx

Email:: addpop

Email:: addspam

Email:: addspambox

Email:: addspamfilter

Email:: changemx

Email:: checkfastmail

Email:: checkpipewd

Email:: clearspambox

Email:: delautoresponder

Email:: deldforward

Email:: delfilter

Email:: dellist

Email:: delmx

Email:: delpop

Email:: delspam

Email:: delspambox

Email:: disable_spam_autodelete

Email:: editquota

Email:: enable_spam_autodelete

Email:: getaging

Email:: getarsbody

Email:: getarscharset

Email:: getarsfrom

Email:: getarshtml

Email:: getarsinterval

▼ Command Line

```
cpapil
--user=username
Serverinfo
servicestatus
```

Notes:

- You **must** URI-encode these values.
- username represents your account-level username.
- For more information and additional output options, read our [Guide to cPanel API 1](#) documentation or run the `cpapil --help` command.
- If you run CloudLinux™, you **must** use the full path of the `cpapil` command:

```
/usr/local
/cpanel/bin/cpapil
```

▼ Output (HTML)

```
<tr
class="statusrow">
  <td
class="statuscell">ex
im-12</td>
  <td
class="statuscell">up
</td>
  <td
class="statuscell"></td>
</tr>
<tr
class="statusrow">
  <td
class="statuscell">my
sql
(5.0.89-community)</td>
  <td
```

- [cPanel API 1 Modules - ProxyUtils](#) — The ProxyUtils module retrieves proxy addresses for applications.
- [cPanel API 1 Modules - Serverinfo](#) — The Serverinfo module displays the status of services on your server.

Email: getarsstart
Email: getarsstop
Email: getarssubject
Email: getmailserver
Email: getmailserveruser
Email: getpopquota
Email: has_spam_as_acl
Email: has_spam_autodelete
Email: listmaildomains
Email: listmaildomainsopt
Email: listmaildomainsoptndef
Email: mainacctdiskused
Email: passwdlist
Email: passwdpop
Email: setmxaccept
Email: spamboxstatus
Email: spamstatus
Email: tracefilter

▼ Fileman

Fileman: changeperm
Fileman: delfile
Fileman: dofileop
Fileman: emptytrash
Fileman: extractfile
Fileman: fileimg
Fileman: fmmkdir
Fileman: fmmkfile
Fileman: fmpushfile
Fileman: fmrename
Fileman: fmsavefile
Fileman: fmsaveht

```
class="statuscell">do  
wn</td>  
<td  
class="statuscell"><i  
mg  
src="/red-status.gif"  
></td>  
</tr>  
<tr  
class="statusrow">  
<td  
class="statuscell">cp  
srvd</td>  
<td  
class="statuscell">up  
</td>  
<td  
class="statuscell"><i  
mg  
src="/green-status.gi  
f"></td>  
</tr>  
<tr  
class="statusrow">  
<td  
class="statuscell">im  
ap</td>  
<td  
class="statuscell">up  
</td>  
<td  
class="statuscell"><i  
mg
```

- cPanel API 1 Functions - Service status — This function displays the status of services that the cPanel daemon monitors.

mfile

Fileman:: fullbacku
p

Fileman:: getfile

Fileman:: htmleedito
r

Fileman:: killdir

Fileman:: listfiles

Fileman:: listfullba
ckups

Fileman:: listtempl
ates

Fileman:: restoreaf

Fileman:: restored
b

Fileman:: restorefil
e

Fileman:: restorefil
es

Fileman:: savehtml
file

Fileman:: showper
m

Fileman:: uploadfil
es

Fileman:: viewfile

▼ Frontpage

FrontPage:: addfp

FrontPage:: delfp

FrontPage:: fpstat
us

▼ Ftp

Ftp:: addftp

Ftp:: delftp

Ftp:: ftpquota

Ftp:: ftpservernam
e

Ftp:: ftpstatslogin

Ftp:: get_anonftp

Ftp:: get_anonftpin


Ftp:: get_welcome
msg

Ftp:: getftpquota

Ftp:: kill_ftp_sessi
on

Ftp:: listftpstatsurl

Ftp:: passwdfp

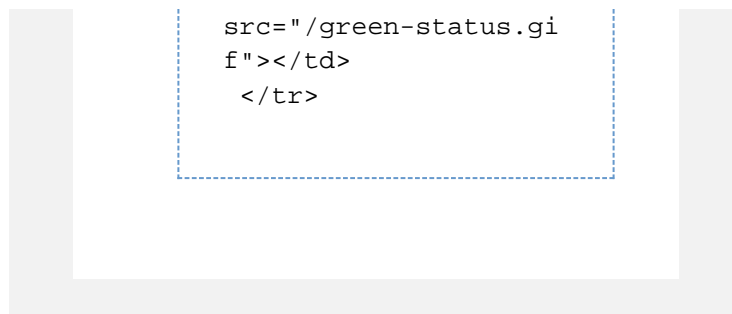

Parameters

This function does not accept parameters.

Returns

This function returns a table of the status of services that the `chkservd` daemon monitors.

Ftp:: set_anonftp

Ftp:: set_anonftpin

Ftp:: set_welcome
msg

▼ Gpg

Gpg:: deletekey

Gpg:: exportkey

Gpg:: exportsecret
key

Gpg:: genkey

Gpg:: importkeys

▼ Htaccess

Htaccess:: checkpr
otected

Htaccess:: del_use
r

Htaccess:: getinde
x

Htaccess:: htdirls

Htaccess:: number
_of_users

Htaccess:: phpsele
ctable

Htaccess:: resnam
e

Htaccess:: set_pas
s

Htaccess:: set_pro
tect

Htaccess:: setinde
x

Htaccess:: setphpr
eference

Htaccess:: showus
ers

▼ ImageManager

ImageManager:: c
onvert

ImageManager:: di
mensions

ImageManager:: h
dimension

ImageManager:: s
cale

ImageManager:: th
umbnail

ImageManager:: w
dimension

▼ LastLogin

LastLogin:: lastlogi
n

▼ LeechProtect

LeechProtect:: disable

LeechProtect:: enable

LeechProtect:: setup

LeechProtect:: showpasswdfile

LeechProtect:: status

▼ LogManager

LogManager:: listdownloads

LogManager:: save settings

LogManager:: show settings

▼ MagicRevision

MagicRevision:: uri

▼ Mime

Mime:: add_handler

Mime:: add_hotlink

Mime:: add_mime

Mime:: add_redirect

Mime:: del_handler

Mime:: del_hotlink

Mime:: del_mime

Mime:: del_redirect

Mime:: linkallownull

Mime:: linkenable

Mime:: linkexts

Mime:: linkrurl

Mime:: linkurls

▼ Mysql

Mysql:: adddb

Mysql:: addhost

Mysql:: adduser

Mysql:: adduserdb

Mysql:: checkdb

Mysql:: deldb

Mysql:: delhost

Mysql:: deluser

Mysql:: deluserdb

Mysql:: gethost
Mysql:: initcache
Mysql:: listdbs
Mysql:: listdbsopt
Mysql:: listusers
Mysql:: listusersopt
Mysql:: number_of
_dbs
Mysql:: number_of
_users
Mysql:: repairdb
Mysql:: routines
Mysql:: updatepriv
s

▼ Net

Net:: dnslookup
Net:: dnszone
Net:: sethastracero
ute

▼ News

News:: displaynew
s

▼ NVData

NVData:: set

▼ OptimizeWS

OptimizeWS:: load
optimizesettings
OptimizeWS:: load
optimizesettings (b
ytes)
OptimizeWS:: opti
mizews

▼ Park

Park:: disabledir
ect
Park:: getredirectu
rl
Park:: park
Park:: setredirectur
l
Park:: unpark

▼ Postgres

Postgres:: adddb
Postgres:: adduser
Postgres:: adduser
db
Postgres:: deldb
Postgres:: deluser

Postgres:: deluser
db

Postgres:: initcach
e

Postgres:: listdbso
pt

Postgres:: listusers
opt

Postgres:: number
_of_dbs

Postgres:: number
_of_users

▼ ProxyUtils

ProxyUtils:: proxya
ddress

▼ Resellers

Resellers:: accoun
tlistopt

Resellers:: themeli
stopt

▼ Serverinfo

Serverinfo:: servic
estatus

▼ SetLang

SetLang:: listlangs
opt

SetLang:: setlang

▼ SpamAssassin

SpamAssassin:: co
nfig

SpamAssassin:: sa
veconfig

▼ SSH

SSH:: getport

▼ SSL

SSL:: delete

SSL:: deletectr

SSL:: deletecsr

SSL:: deletekey

SSL:: genctr

SSL:: gencsr

SSL:: genkey

SSL:: getcabundle

SSL:: getcname

SSL:: install

SSL:: installedhost

SSL:: listkeysopt

SSL:: showcrt

SSL:: showcsr

SSL:: showkey

SSL:: sslsharedsta
tus

SSL:: uploadcrt

SSL:: uploadkey

▼ StatManager

StatManager:: doF
orm

StatManager:: upd
ateUserConfig

▼ Stats

Stats:: analoglist

Stats:: awstats

Stats:: bwbar

Stats:: errlog

Stats:: lastvisitors

Stats:: showbandw
idth

Stats:: webalizer

Stats:: webalizerftp

▼ SubDomain

SubDomain:: adds
ubdomain

SubDomain:: cplist
subdomains

SubDomain:: disab
lesubrd

SubDomain:: listsu
bdomainsop

SubDomain:: setsu
burl

▼ UI

UI:: confirm

UI:: redirect

UI:: showresult