

cPanel API 2 Functions - MysqlFE::getmysqlserverprivileges

Guide to cPanel API 2

Return Data

Filter and Sort Output

Paginate Output

Output Columns

Calls from the WHM API

cPanel Tags (deprecated)

Description

This function lists the MySQL® server's available privileges.

Warning:

We **strongly** recommend that you use [UAPI](#) instead of cPanel API 2. However, no equivalent UAPI function exists.

Important:

In cPanel & WHM version 76 and later, when you disable the MySQL role, the system **disables** this function. For more information, read our [How to Use Server Profiles](#) documentation.

Function information

Examples

[AddonDomain](#)

WHM API (JSON)

```
https://hostname.example.com:2087/cpsess#####/json-api/cpanel?cpanel_jsonapi_user=user&cpanel_jsonapi_api_version=2&cpanel_jsonapi_module=MysqlFE&cpanel_jsonapi_function=getmysqlserverprivileges
```

Note:

For more information, read our [Calls from the WHM API](#) documentation.

- AddonDomain: `addomain`
- AddonDomain: `deladdondomain`
- AddonDomain: `listaddondomains`
- Backups: `listfullbackups`
- Bandwidth: `addhttpbandwidth`
- Bandwidth: `getbwdata`
- Bandwidth: `gethourlyaveragebwoveryear`
- BoxTrapper: `accountmanagelist`
- Branding: `addbrandingobj`
- Branding: `applist`
- Branding: `brandingeditor`
- Branding: `createpkg`
- Branding: `cssmerge`
- Branding: `delbrandingobj`
- Branding: `delpkg`
- Branding: `gensprites`

About this module

The MysqlFE module manages MySQL databases, users, and services.

Branding:: getbrandingpkg

Branding:: getbrandingpkgstatus

Branding:: getdefaultbrandingpkg

Branding:: installbrandingpkgs

Branding:: installimages

Branding:: killimages

Branding:: listingtypes

Branding:: listobjecttypes

Branding:: preloadconf

Branding:: resetall

Branding:: resetscripts

Branding:: resethtml

Branding:: resolvefile

Branding:: resolvelocalcss

Branding:: savelocalcss

Branding:: setbrandingpkgstatus

Branding:: showpackages

Branding:: spritelist

▼ CSVImport

CSVImport:: columnchoices

CSVImport:: configimport

CSVImport:: data

CSVImport:: fetchimportdata

CSVImport:: isenabled

CSVImport:: loaddata

CSVImport:: processdata

CSVImport:: sendcontact

CSVImport:: uploadimport

▼ LiveAPI PHP Class

```
$cpanel = new  
CPANEL(); // Connect  
to cPanel - only do  
this once.  
  
// List all MySQL  
permissions  
$all_privileges =  
$cpanel->api2(  
    'MysqlFE',  
    'getmysqlserverprivileges'  
);
```

Note:

For more information, read our [Guide to the LiveAPI System](#).

▼ LiveAPI Perl Module

```
my $cpliveapi =  
Cpanel::LiveAPI->new(  
); # Connect to  
cPanel - only do this  
once.  
  
# List all MySQL  
permissions  
my $all_privileges =  
$cpliveapi->api2(  
    'MysqlFE',  
    'getmysqlserverprivileges',  
);
```

Note:

For more information, read our [Guide to the LiveAPI System](#).

About cPanel API 2

cPanel API 2 accesses and modifies data for cPanel accounts.

Notes:

- The `Fe` int
- The `Ur` `mi` `us` `or` `20` `or` `20` `).` `'` `20` `or` `20` `).`

Find a function

- Contactus:: isenab
led
 - Contactus:: sendc
ontact
 - Cron:: add_line
 - Cron:: edit_line
 - Cron:: fetchcron
 - Cron:: get_email
 - Cron:: listcron
 - Cron:: remove_line
 - Cron:: set_email
 - CustInfo:: contacte
mails
 - CustInfo:: contactp
refs
 - CustInfo:: displayc
ontactinfo
 - CustInfo:: savecon
tactinfo
 - DBmap:: status
 - DBmap:: version
 - DKIMUI:: available
 - DKIMUI:: getrecor
ds
 - DKIMUI:: install
 - DKIMUI:: installed
 - DKIMUI:: uninstall
 - Denylp:: listdenyip
s
 - DiskCounter:: disk
_counter
 - DiskUsage:: buildc
ache
 - DiskUsage:: clearc
ache
 - DiskUsage:: fetch_
raw_disk_usage
 - DiskUsage:: fetchd
iskusage
 - DiskUsage:: fetchd
iskusagewithextras

▼ cPanel Tag System (deprecated)

Warnings:

- In cPanel & WHM version 11.30 and later, cPanel tags are **deprecat**ed. We **strongly** recommend that you **only** use the [LiveAPI](#) system to call the cPanel APIs. Examples are **only** present in order to help developers move from the old cPanel tag system to our [LiveAPI](#).
- cPanel API 2 calls that use cPanel tags vary in code syntax and in their output.
- For more information, read our [Deprecat](#)ed cPanel Tag Usage docume
ntation.

▼ Command Line

```
cpapi2
--user=username
MysqlFE
getmysqlserverprivile
ges
```

Notes:

- You **must** **URI-encode** values.
- username represents your account-level username.
- You **must** run the `--user=username` command.
- For more information and additional output options, read our [Guide to cPanel API 2](#) documentation or run the `cpapi2 --help` command.
- If you run CloudLinux™, you **must** use the full path of the `cpapi2` command:

```
/usr/local
/cpanel/bi
n/cpapi2
```

▼ Output (JSON)

```
{
  "cpanelresult": {
    "apiversion": 2,
    "data": [
      {
        "privilege":
```

- cPan
el
API
2
Mod
ules
-
Mysq
LFE
—
The
Mysq
LFE
mod
ule
man
ages
MyS
QL®
data
base
s,
user
s,
and
servi
ces.
- cPan
el
API
2
Func
tions
-
Mysq
LFE::
auth
orize
host
—
This
functi
on
auth
orize
sa
host
for
remo
te
acce
ss to
the
acco
unt's
data
base
.

- ▼ DnsLookup
 - DnsLookup:: name2ip
- ▼ DomainLookup
 - DomainLookup:: countbaseddomains
 - DomainLookup:: getbaseddomains
 - DomainLookup:: getdocroot
 - DomainLookup:: getdocroots
 - DomainLookup:: getmaindomain
- ▼ Email
 - Email:: accountname
 - Email:: adddomainforward
 - Email:: addforward
 - Email:: addmx
 - Email:: addpop
 - Email:: browseboxes
 - Email:: changemx
 - Email:: checkmaindiscard
 - Email:: clearpopcache
 - Email:: deletefilter
 - Email:: delforward
 - Email:: delmx
 - Email:: delpop
 - Email:: disablefilter
 - Email:: editquota
 - Email:: enablefilter
 - Email:: fetchautoresponder
 - Email:: fetchcharmaps
 - Email:: filteractions
 - Email:: filterlist
 - Email:: filtername
 - Email:: filterrules
 - Email:: get_archiving_configuration
 - Email:: get_archiving_default_configu

```

"ALTER ",

"description": "To
alter the table"
    },
    {
        "privilege":
"ALTER ROUTINE",

"description": "To
alter or drop stored
functions\procedures
"
    },
    {
        "privilege":
"CREATE ",

"description": "To
create new databases
and tables"
    },
    {
        "privilege":
"CREATE ROUTINE",

"description": "To
use CREATE
FUNCTION\PROCEDURE"
    },
    {
        "privilege":
"CREATE TEMPORARY
TABLES",

"description": "To
use CREATE TEMPORARY
TABLE"
    },
    {
        "privilege":
"CREATE VIEW",

"description": "To
create new views"
    },
    {
        "privilege":
"DELETE",

"description": "To
delete existing rows"
    },

```

- cPanel API 2 Functions - MySQL:: changeuserpassword — This function changes a database user's password.
- cPanel API 2 Functions - MySQL:: createdb — This function creates a database.

ration
Email: get_archiving_types
Email: get_default_email_quota
Email: get_email_signing
Email: get_max_email_quota
Email: getabsbrowse_dir
Email: getalwaysaccept
Email: getdiskusage
Email: getmxcheck
Email: has_delegated_mailman_lists
Email: list_system_filter_info
Email: listaliasesbackups
Email: listautoresponders
Email: listdefaultaddresses
Email: listdomainforwards
Email: listfilterbackups
Email: listfilters
Email: listforwards
Email: listlists
Email: listmaildomains
Email: listmx
Email: listmxs
Email: listpops
Email: listpopssingle
Email: listpopswithdisk
Email: listpopswithimage
Email: loadfilter
Email: passwdpop
Email: reorderfilters

```
{
  "privilege":
  "DROP",
  "description": "To
drop databases,
tables, and views"
},
{
  "privilege":
  "EXECUTE",
  "description": "To
execute stored
routines"
},
{
  "privilege":
  "FILE",
  "description": "To
read and write files
on the server"
},
{
  "privilege":
  "GRANT OPTION",
  "description": "To
give to other users
those privileges you
possess"
},
{
  "privilege":
  "INDEX",
  "description": "To
create or drop
indexes"
},
{
  "privilege":
  "INSERT",
  "description": "To
insert data into
tables"
},
{
  "privilege":
  "LOCK TABLES",
```

Email:: set_archiving_configuration

Email:: set_archiving_default_configuration

Email:: set_email_signing

Email:: setalwaysaccept

Email:: setdefaultaddress

Email:: setmxcheck

Email:: storefilter

Email:: tracefilter

▼ EmailTrack

EmailTrack:: search

EmailTrack:: stats

EmailTrack:: trace

▼ Encoding

Encoding:: get_encodings

Encoding:: guess_file

Encoding:: guess_file_opts

▼ FSTest

FSTest:: dirisempty

▼ Fileman

Fileman:: autocompletedir

Fileman:: fileop

Fileman:: getabsdir

Fileman:: getdir

Fileman:: getdiractions

Fileman:: getdiskinfo

Fileman:: getedittype

Fileman:: getfileactions

Fileman:: getpath

Fileman:: listfiles

Fileman:: mkdir

Fileman:: mkfile

Fileman:: savefile

```
"description": "To use LOCK TABLES (together with SELECT privilege)"
```

```
    },  
    {  
      "privilege":  
"REFERENCES",
```

```
"description": "To have references on tables"
```

```
    },  
    {  
      "privilege":  
"SELECT",
```

```
"description": "To retrieve rows from table"
```

```
    },  
    {  
      "privilege":  
"SHOW VIEW",
```

```
"description": "To see views with SHOW CREATE VIEW"
```

```
    },  
    {  
      "privilege":  
"TRIGGER",
```


```
"description": "To use triggers"
```

```
    },  
    {  
      "privilege":  
"UPDATE",
```

```
"description": "To update existing rows"
```

```
    }  
  ],  
  "func":  
"getmysqlserverprivileges",  
  "event": {  
    "result": 1  
  },  
  "module":  
"MysqlFE"  
}
```

- Fileman:: search
- Fileman:: statfiles
- Fileman:: uploadfiles
- Fileman:: viewfile
- ForcePassword:: get_force_password_flags
 - ForcePassword:: update_force_password_flags
- Frontpage:: fpenabled
 - Frontpage:: list
- Ftp:: addftp
 - Ftp:: delftp
 - Ftp:: listftp
 - Ftp:: listftpsessions
 - Ftp:: listftpwithdisk
 - Ftp:: passwd
 - Ftp:: setquota
- Gpg:: listgpgkeys
 - Gpg:: listsecretgpgkeys
 - Gpg:: number_of_private_keys
 - Gpg:: number_of_public_keys
- Htaccess:: listuser
 - Htaccess:: listusers
- HttpUtils:: getdirindices
- ImageManager:: thumbnail
- LVEInfo:: getUsage
- LangMods:: getarcname
 - LangMods:: getkey

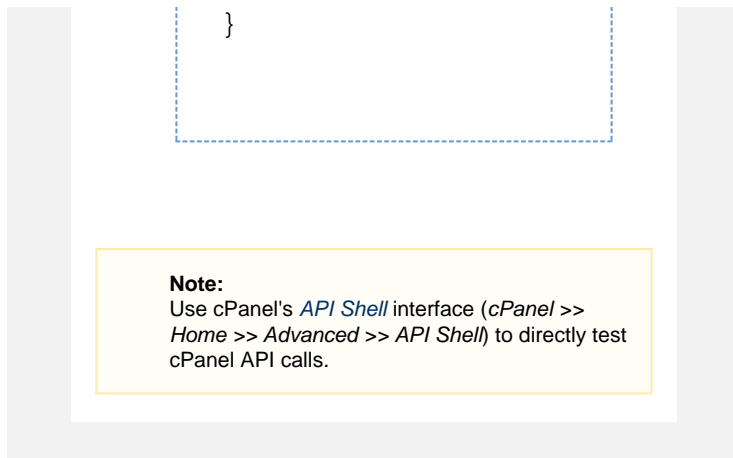

Parameters

This function does not accept parameters.

Returns

Return	Type	Description	Possible values	Example
	hash	A hash that contains information about each privilege.	A hash that contains the privileges and description returns.	
privileges	string	A privilege name. The function returns this value in the privilege information hash.	<ul style="list-style-type: none"> • "ALTER" • "ALTER ROUTINE" • "CREATE" • "CREATE ROUTINE" • "CREATE TEMPORARY TABLES" • "CREATE VIEW" • "DELETE" • "DROP" • "EVENT" • "EXECUTE" • "INDEX" • "INSERT" • "LOCK TABLES" • "REFERENCES" • "SELECT" • "SHOW VIEW" • "TRIGGER" • "UPDATE" 	ALTER

LangMods:: getpre
fix

LangMods:: install

LangMods:: langlis
t

LangMods:: list_av
ailable

LangMods:: list_in
stalled

LangMods:: magic
_status

LangMods:: pre_ru
n

LangMods:: search

LangMods:: setup

LangMods:: uninst
all

LangMods:: updat
e

▼ LeechProtect

LeechProtect:: set
up

▼ Locale

Locale:: get_encod
ing

Locale:: get_html_
dir_attr

Locale:: get_locale
_name

Locale:: get_user_
ocale

Locale:: get_user_
ocale_name

Locale:: numf

▼ Logaholic

Logaholic:: adduse
r

Logaholic:: adduse
rprofile

Logaholic:: deleteu
ser

Logaholic:: deleteu
serprofile

Logaholic:: edituse
r

Logaholic:: fetchus
er

Logaholic:: listuser
profiles

Logaholic:: logahol
iclink

	description	string	A description of the privilege. The function returns this value in the privilege information hash.	A valid string.	To alter the table
	reason	string	A reason for failure. Note : This function only returns a reason value if it failed.	A string that describes the error.	This is an error message.
	result	Boolean	Whether the function succeeded.	<ul style="list-style-type: none"> • 1 — The function succeeded. • 0 — The function failed. 	1

Logaholic:: proces
sstats

▼ Mime

Mime:: list_hotlinks

Mime:: listhandlers

Mime:: listmime

Mime:: listredirects

Mime:: redirectname

Mime:: redirecturlname

▼ MysqlFE

MysqlFE:: authorizehost

MysqlFE:: change
dbuserpassword

MysqlFE:: created
b

MysqlFE:: created
buser

MysqlFE:: dbuserexists

MysqlFE:: deauthorizehost

MysqlFE:: deleted
b

MysqlFE:: deleted
buser

MysqlFE:: getalldb
sinfo

MysqlFE:: getalldb
usersanddbs

MysqlFE:: getdatabasesprivileges

MysqlFE:: getdatabases

MysqlFE:: gethosts

MysqlFE:: getmysqlprivileges

MysqlFE:: getmysqlserverprivileges

MysqlFE:: has_my
cnf_for_cpuser

MysqlFE:: listdbs

MysqlFE:: listdatabasesackup

MysqlFE:: listhosts

MysqlFE:: listusers

MysqlFE:: listusers
indb

MysqlFE:: revoked
buserprivileges

MysqlFE:: setdbus
erprivileges

MysqlFE:: userdbp
rivs

▼ MysqlOptimizer

MysqlOptimizer:: f
etch_slow_queries

▼ NVData

NVData:: get

NVData:: set

NVData:: setall

▼ Net

Net:: dnszone

Net:: traceroute

▼ News

News:: does_news
_exist

News:: does_news
_type_exist

News:: get_news

▼ PHPINI

PHPINI:: getallopti
ons

PHPINI:: getoption
s

▼ Park

Park:: listaddondo
mains

Park:: listparkeddo
mains

Park:: park

Park:: unpark

▼ Passwd

Passwd:: change_
password

Passwd:: set_dige
st_auth

▼ PasswdStrength

PasswdStrength::
appstrengths

PasswdStrength::
get_password_stre
ngth

PasswdStrength::
get_required_stren
gth

▼ Postgres

Postgres:: listdbs

Postgres:: listusers

Postgres:: listusers
indb

Postgres:: userexi
sts

▼ Rand

Rand:: getranddat
a

▼ Resellers

Resellers:: get_su
b_accounts

▼ RoR

RoR:: addapp

RoR:: changeapp

RoR:: importrails

RoR:: listapps

RoR:: listrewrites

RoR:: needsimport

RoR:: removeapp

RoR:: removerewri
te

RoR:: restartapp

RoR:: setuprewrite

RoR:: softrestartap
p

RoR:: startapp

RoR:: stopapp

▼ SetLang

SetLang:: setlocale

▼ SourceIPCheck

SourceIPCheck:: a
ddip

SourceIPCheck:: d
elip

SourceIPCheck:: g
etaccount

SourceIPCheck:: li
stips

SourceIPCheck:: l
oadsecquestions

SourceIPCheck:: r
esetsecquestions

SourceIPCheck:: s
amplequestions

SourceIPCheck:: s
avesecquestions

▼ SPFUJ

SPFUJ:: available

SPFUJ:: count_sett
ings

SPFUI:: entries_co
mplete

SPFUI:: get_raw_r
ecord

SPFUI:: getmainse
rverip

SPFUI:: install

SPFUI:: installed

SPFUI:: list_settin
gs

SPFUI:: load_curr
ent_values

SPFUI:: uninstall

▼ SSH

SSH:: authkey

SSH:: converttopp
k

SSH:: delkey

SSH:: fetchkey

SSH:: genkey

SSH:: genkey_leg
acy

SSH:: importkey

SSH:: listkeys

▼ SSL

SSL:: fetchcabundl
e

SSL:: fetchinfo

SSL:: genctr

SSL:: gencsr

SSL:: genkey

SSL:: getcnname

SSL:: installssl

SSL:: listcrts

SSL:: listcsrs

SSL:: listkeys

SSL:: listsslitems

SSL:: uploadcrt

SSL:: uploadkey

▼ SSLInfo

SSLInfo:: fetchinfo

▼ StatCache

StatCache:: clearc
ache

▼ Stats

Stats:: getmonthly

bandwidth

Stats:: getmonthly
domainbandwidth

Stats:: getthismont
hsbwusage

Stats:: lastapache
hits

Stats:: lastvisitors

Stats:: listanalog

Stats:: listawstats

Stats:: listlastvisito
rs

Stats:: listrawlogs

Stats:: listurchin

Stats:: listwebalize
r

▼ StatsBar

StatsBar:: getrowc
ounter

StatsBar:: rowcoun
ter

StatsBar:: setrowc
ounter

StatsBar:: stat

▼ SubDomain

SubDomain:: adds
ubdomain

SubDomain:: chan
gedocroot

SubDomain:: delsu
bdomain

SubDomain:: getre
servedsubdomains

SubDomain:: listsu
bdomains

SubDomain:: validr
egex

▼ Themes

Themes:: apply_n
ew_theme

Themes:: does_cp
anel_theme_exist

Themes:: get_avail
able_themes

Themes:: get_the
mes_list

Themes:: restore_
saved_theme

▼ UI

UI:: dynamicinclud
elist

UI:: includelist

UI:: listform

UI:: paginate

UI:: paginate_list

▼ UserHttpUtils

UserHttpUtils:: get
dirindices

▼ WebDisk

WebDisk:: addweb
disk

WebDisk:: delweb
disk

WebDisk:: hasdige
st

WebDisk:: listwebd
isks

WebDisk:: passwd
webdisk

WebDisk:: set_dig
est_auth

WebDisk:: set_ho
mdir

WebDisk:: set_per
ms

WebDisk:: setstatu
s

▼ WebmailApps

WebmailApps:: list
webmailapps

▼ ZoneEdit

ZoneEdit:: add_zo
ne_record

ZoneEdit:: edit_zo
ne_record

ZoneEdit:: fetch_c
panel_generated_
domains

ZoneEdit:: fetchzo
ne

ZoneEdit:: fetchzo
ne_records

ZoneEdit:: fetchzo
nes

ZoneEdit:: get_zon
e_record

ZoneEdit:: remove
_zone_record

ZoneEdit:: resetzo
ne

