

UAPI Functions - SSL::show_cert

Guide to UAPI

Return Data
Filter Output
Sort Output
Paginate Output
Output Columns
Calls from the WHM API
Custom UAPI Modules

Backup
Backup::fullbackup_to_ftp
Backup::fullbackup_to_homedir
Backup::fullbackup_to_scp_with_key

Backup::fullbackup_to_scp_with_password
Backup::list_backups

Bandwidth
Bandwidth::get_enabled_protocols
Bandwidth::get_retention_periods
Bandwidth::query

Batch
Batch::strict

Brand
Brand::read

Branding
Branding::file
Branding::get_applications
Branding::get_application_information
Branding::get_available_applications
Branding::get_info

Description

This function retrieves a certificate.

Examples

▼ cPanel or Webmail Session URL

```
https://hostname.example.com:2083/cpsess#####/execute/SSL/show_cert?friendly_name=TestCert
```

▼

Note:

This example calls the UAPI function via a cPanel session. For more information, read our [Guide to UAPI](#) documentation.

▼ LiveAPI PHP Class

```
$cpanel = new CPANEL(); // Connect to cPanel - only do this once.  
  
// Retrieve the certificate  
"TestCert"  
$SSL_show_cert = $cpanel->uapi('SSL', 'show_cert', array('friendly_name' => 'TestCert', ));
```

Note:

For more information, read our [Guide to the LiveAPI System](#).

Function information

About this module

The SSL module manages certificates, certificate requests, and keys on your server.

About UAPI

UAPI accesses and modifies data for cPanel accounts.

information_for_applications

Branding:: image

Branding:: include

Branding:: spritelist

CacheBuster

CacheBuster:: read

CacheBuster:: update

Chkserverd

Chkserverd:: get_exim_ports

Chkserverd:: get_exim_ports_ssl

Chrome

Chrome:: get_dom

Contactus

Contactus:: is_enabled

cPAddons

cPAddons:: get_available_addons

cPAddons:: get_instance_settings

cPAddons:: list_addon_instances

cPGreyList

cPGreyList:: disable_all_domains

cPGreyList:: disable_domains

cPGreyList:: enable_all_domains

cPGreyList:: enable_domains

cPGreyList:: has_greylisting_enabled

cPGreyList:: list_domains

DAV

DAV:: disable_shared_global_addressbook

DAV:: enable_shared_global_addressbook

DAV:: get_calendar_contacts_config

DAV:: has_shared_global_addressbook

LiveAPI Perl Module

```
my $cpliveapi =  
Cpanel::LiveAPI->new(  
); # Connect to  
cPanel - only do this  
once.
```

```
# Retrieve the  
certificate  
"TestCert"  
my $$SSL_show_cert =  
$cpliveapi->uapi(  
  'SSL',  
  'show_cert', {  
  
    'friendly_name'  
=> 'TestCert',  
  }  
);
```

Note:

For more information, read our [Guide to the LiveAPI System](#).

cPanel Template Toolkit

```
<!-- Retrieve the  
certificate  
"TestCert" -->  
[% data = execute(  
  'SSL', 'show_cert', {  
    friendly_name =>  
    'TestCert' } ); %]  
[% FOREACH q = data  
  %]  
  <p>  
    [% q %]  
  </p>  
[% END %]
```

Note:

For more information, read our [Guide to Template Toolkit documentation](#).

Notes:

- The `Fe`
- The `int`
- The `Ur`
- The `mu`
- The `us`
- The `20`
- The `or`
- The `20`
- The `20`
- The `or`
- The `20`
- The `20`

Find
a
function

- UAPI Functions - SSL: delete_ssl | — This function removes SSL from a domain.

DAV:: is_dav_service_enabled

DAV:: is_horde_enabled

DCV

DCV:: check_domains_via_dns

DCV:: check_domains_via_http

DCV:: ensure_domains_can_pass_dcv

DomainInfo

DomainInfo:: domains_data

DomainInfo:: list_domains

DomainInfo:: main_domain_builtin_subdomain_aliases

DomainInfo:: single_domain_data

DNS

DNS:: ensure_domains_reside_only_locally

DNS:: has_local_authority

DNSSEC

DNSSEC:: disable_dnssec

DNSSEC:: enable_dnssec

DNSSEC:: fetch_dns_records

DNSSEC:: set_nsec3

DNSSEC:: unset_nsec3

Email

Email:: account_name

Email:: add_auto_responder

Email:: add_domain_forwarder

Email:: add_forwarder

Email:: add_list

Email:: add_mailman_delegates

Email:: add_mx

Email:: add_pop

Command Line

```
uapi --user=username
SSL show_cert
friendly_name=TestCertificate
```

Notes:

- You **must** URI-encode values.
- `username` represents your account-level username.
- For more information and additional output options, read our [Guide to UAPI](#) documentation or run the `uapi --help` command.
- If you run CloudLinux™, you **must** use the full path of the `uapi` command:

```
/usr/local
/cpanel/bin/uapi
```

Output (JSON)

```
{
  "messages": null,
  "errors": null,
  "status": 1,
  "data": {
    "cert":
    "-----BEGIN
    CERTIFICATE-----
    MIIDcTCCAImgAwIBAgIFA
    U+BNVgwDQYJKoZIhvcNAQ
    EFBQAwUTESMBAGA1UEAww
    J
    c2lza28udGxkMQswCQYDV
    QQGEwJVUzEPMA0GA1UECg
    wGY1BhbmVsMQswCQYDVQQ
    I
    DAJUWDEQMA4GA1UEBwwHS
    G91c3RvbG91c3RvbG91c3R
    YyMjI2MTlaFw0xNTEwMDY
    Y
    MjI2MTlaMFEwEjAQBGNVB
    AMMCXNpc2tvLnRsc2ZELMA
    kGA1UEBhMCVVMxZDZANBgN
    V
```

- UAPI Functions - SSL: :fetch_certificate_for_domain — This function retrieves the best-available certificate for the domain.
- UAPI Functions - SSL: :fetch_certificate_info — This function retrieves all of a certificate's available information.

Email:: add_spam_filter
Email:: browse_mailbox
Email:: change_mx
Email:: check_fastmail
Email:: check_pipe_forwarder
Email:: delete_auto_responder
Email:: delete_do_main_forwarder
Email:: delete_filter
Email:: delete_forwarder
Email:: delete_held_messages
Email:: delete_list
Email:: delete_mx
Email:: delete_pop
Email:: disable_filter
Email:: disable_mailbox_autocreate
Email:: disable_spam_assassin
Email:: disable_spam_autodelete
Email:: disable_spam_box
Email:: dispatch_client_settings
Email:: edit_pop_quota
Email:: enable_filter
Email:: enable_mailbox_autocreate
Email:: enable_spam_assassin
Email:: enable_spam_box
Email:: fetch_charmaps
Email:: fts_rescan_mailbox
Email:: generate_mailman_otp
Email:: get_auto_r

BAoMBmNQYW51bDELMAkGA
1UECAwCVFgxEADAObgNVBA
cMB0hvdXN0b24wgGEiMA0
G
CSqGSIB3DQEBAQUAA4IBD
wAwggEKAoIBAQC9zx6zGi
HdmWA0dKtoXmJiWXPZ9E3
P
Xx3YHsjFEWW7e5pH0vZ+j
VMzDmm5nsJ7RXrAkZO1Iv
pIpVLvoQfiJOWVvkD+o9F
W
voK1tWJS72FSgPju+58mA
2ieBuc87A790Pzuv1P3NR
3zFLAJUR99zkHR1fpri/d
a
M3PBW08ET48FWkyUlkOeZ
aU1F67/+wrEiNgg+t1qhK
OCAB61PdNVkLaSGHimksu
C
+Czk8Kq9nuS0E0TCnDtjj
EyJ455FUcaCfcz1Tb8xkB
/F90Re74yTzD+v1k0tFMG
6
PLj/ajIwWqw00qmQ8wX3N
RxxkGz5kVO1wrVJarKQ5
EYQ3/mgvit0v6dAgMBAAG
j
UDBOMB0GA1UdDgQWBRRw+
wKBo34+bgexjAa3EMDsgS
Cd7zAfBgNVHSMEGDAWgBR
w
+wKBo34+bgexjAa3EMDsg
SCd7zAMBgNVHRMEBTADAQ
H/MA0GCSqGSIB3DQEBBQU
A
A4IBAQCHRXIs53opzKM2r
M8Qe8lcw524WK6hqy2EWr
ZHp78N7rU7/6DQ/I3hv3W
h
cDDIO04I2/Xhe88MLBaLo
M367Ya+vy7CaLr14aLi/S
fQsZMA0ALBvMao+Fis0iV
w
FYq/NLgSXw+fgnpFskt8v
8iQZ+4Kaal8U8e9sVgu8m
0RgO7rzymleRiIKpsKdlr
h
/SD7LbSN7M7TRL3QqF7lt
w9sQhAAsQcRaBBF21pdWr
qhiGZ+Eioo3hhgwNavH2a
g
qz78ddHwrFpHFwrEeUk10

- UAPI Functions - SSL: :fetch_key_and_certificate — This function extracts the private key and CA bundle information from a certificate.

esponder
Email: get_charts
Email: get_client_settings
Email: get_default_email_quota
Email: get_default_email_quota_mib
Email: get_disk_usage
Email: get_filter
Email: get_held_message_count
Email: get_mailbox_autocreate
Email: get_mailman_delegates
Email: get_main_account_disk_usage
Email: get_main_account_disk_usage_bytes
Email: get_max_email_quota
Email: get_max_email_quota_mib
Email: get_pop_quota
Email: get_spam_settings
Email: get_webmail_settings
Email: has_delegated_mailman_lists
Email: has_plaintext_authentication
Email: hold_outgoing
Email: is_integer
Email: list_auto_responders
Email: list_default_address
Email: list_domain_forwarders
Email: list_filters
Email: list_filters_backups
Email: list_forward

```
fpPb76MYIce7xIy/4oQNd
g6fOq4l/FrajBv+WkzDVP
a
Km6r7YmwfLN/YMZBHXSRS
8oOGP9W
-----END
CERTIFICATE-----",
    "text":
    "Certificate:\n
    Data:\n Version: 3
    (0x2)\n Serial
    Number:\n
    d1:e8:74:8c:d0:69:d2:
    55\n
        Signature
        Algorithm:
        sha1WithRSAEncryption
        \n Issuer: CN =
        example.com, C = US,
        emailAddress =
        username@example.com,
        O = Example, ST =
        Texas, L =
        Houston\n Validity\n
        Not Before: Apr
        10 22:38:10 2013
        GMT\n Not After : Apr
        10 22:38:10 2014
        GMT\n
        Subject: CN =
        example.com, C = US,
        emailAddress =
        username@example.com,
        O = Example, ST =
        Texas, L = Houston\n
        Subject Public
        Key Info:\n Public
        Key Algorithm:
        rsaEncryption\n
        Public-Key: (2048
        bit)\n Modulus:\n
        00:c6:9c:e3:37:1a:fc:
        e6:1b:e4:29:4d:8e:ee:
        ec:\n bd:7a:52:12:ef:
        34:71:64:77:e0:79:76:
        6d:ba:f0:\n
        77:fd:f0:92:18:b0:84:
        c3:f7:12:3a:a9:b9:1d:
        16:\n
        6c:a0:10:6d:f0:55:17:
        35:27:ff:81:a7:46:e6:
```

ers	d4:\n
Email:: list_forward_ers_backups	36:97:34:01:3a:2f:6d:61:9a:
Email:: list_lists	04:20:e3:fd:06:11:\n
Email:: list_mail_domains	8b:a4:5e:4f:6d:0d:93:8e:3b:cc:cb:19:b3:cb:74:\n
Email:: list_mx	
Email:: list_pops	
Email:: list_pops_with_disk	7a:54:82:ae:52:9e:46:31:7a:02:44:0b:7b:26:e8:\n
Email:: list_system_filter_info	84:aa:91:2b:25:c1:42:0c:cc:5d:c4:d5:c4:cf:df:\n
Email:: passwd_list	
Email:: passwd_pop	
Email:: release_outgoing	de:4c:7c:22:99:ab:06:79:99:16:1e:a7:49:5b:9b:\n
Email:: remove_mailman_delegates	89:97:18:3c:1e:4b:c6:c5:b5:b2:9d:7d:be:b9:91:\n
Email:: reorder_filters	
Email:: set_always_accept	c6:08:38:7d:dc:81:18:2b:0c:2c:da:29:f4:aa:a2:\n
Email:: set_default_address	72:46:d9:c2:68:31:89:51:ab:32:af:7a:8d:9b:a7:\n
Email:: set_list_privacy_options	
Email:: stats_db_status	d8:b8:b5:37:21:03:91:1d:4e:d8:fc:f1:0e:1f:96:\n
Email:: store_filter	
Email:: suspend_incoming	17:d6:90:25:c1:3a:1a:76:4c:9e:2b:7e:b9:9c:f5:\n
Email:: suspend_login	86:0a:cf:ea:2f:eb:bc:33:ee:69:49:b9:c2:e6:a0:\n
Email:: suspend_outgoing	ef:ee:90:19:4a:2a:64:7e:ef:96:46:7e:7d:e2:35:\n
Email:: trace_filter	
Email:: unsuspend_incoming	
Email:: unsuspend_login	ec:d9:cf:34:42:7a:3d:c1:22:b9:68:a2:b3:02:a3:\n
Email:: unsuspend_outgoing	7f:f5\n
Email:: verify_password	Exponent: 65537 (0x10001)\n X509v3 extensions:\n X509v3 Subject Key Identifier: \n 6A:A1:EA:62:FB:B2:C4:AC:04:B0:43:DD:56:BE:
▼ EmailAuth	
EmailAuth:: disable_dkim	
EmailAuth:: enable_dkim	

```
EmailAuth:: ensure
_dkim_keys_exist

EmailAuth:: fetch_
dkim_private_keys

EmailAuth:: install
_dkim_private_key
s

EmailAuth:: install
_spf_records

EmailAuth:: validat
e_current_dkims

EmailAuth:: validat
e_current_ptrs

EmailAuth:: validat
e_current_spfs

ExternalAuthenticat
ion
  ExternalAuthentica
tion:: add_authn_li
nk

  ExternalAuthentica
tion:: configured_
modules

  ExternalAuthentica
tion:: get_authn_lin
ks

  ExternalAuthentica
tion:: has_external
_auth_modules_co
nfigured

  ExternalAuthentica
tion:: remove_auth
n_link

Features
  Features:: get_feat
ure_metadata

  Features:: has_fea
ture

  Features:: list_feat
ures

Fileman
  Fileman:: autocom
pletedir

  Fileman:: empty_tr
ash

  Fileman:: get_file_
content

  Fileman:: get_file_i
nformation

  Fileman:: list_files

  Fileman:: save_file
_content

  Fileman:: transcod
e
```

```
8A:8D:FA:16:D3:F4\n
      X509v3 Authority
Key Identifier: \n
keyid:6A:A1:EA:62:FB:
B2:C4:AC:04:B0:43:DD:
56:BE:8A:8D:FA:16:D3:
F4\n\n
      X509v3 Basic
Constraints: \n
CA:TRUE\n Signature
Algorithm:
sha1WithRSAEncryption
\n

3c:1e:f7:3d:20:1b:a2:
bd:5c:d6:0f:2a:9e:f3:
b0:83:bf:a9:\n
a0:90:9b:96:b1:a6:1e:
8b:be:7c:f5:72:58:a0:
48:3e:68: 43:\n

06:37:63:0a:cb:9c:23:
98:c6:9e:f1:73:e8:4b:
71:ac:07:fc:\n
d0:5c:e1:55:4f:be:a7:
75:5a:57:da:a1:c2:46:
63:8f:3a:70:\n

4c:42:3c:03:4c:a0:47:
a3:fc:
ae:15:03:25:a5:78:63:
a2:73:\n
cd:47:d5:64:7c:d4:f5:
85:f7:03:b8:b4:d8:95:
75:6a:78:5c:\n

e6:c7:69:02:7b:a4:fc:
4d:8c:80:7b:c7:1c:71:
04:ba:53:71:\n 7a:
ce:00:cb:0e:5e:21:89:
02:ba:90:02:8e:b5:79:
8e:84:50:\n

b0:21:63:b0:ac:19:80:
c5:1d:a2:95:68:b7:ee:
35:10:fa:db:\n
f5:bf:b0:16:b1:34:76:
f2:d6:ee:07:3b:6d:b6:
0c:1d:b4:e5:\n

53:50:23:b8:c4:bf:fe:
d6:77:ec:89:68:a0:d8:
dd:f4:f5:fa:\n
```

Fileman:: upload_files

- ▼ Ftp
 - Ftp:: add_ftp
 - Ftp:: allows_anonymous_ftp
 - Ftp:: allows_anonymous_ftp_incoming
 - Ftp:: delete_ftp
 - Ftp:: ftp_exists
 - Ftp:: get_ftp_daemon_info
 - Ftp:: get_port
 - Ftp:: get_quota
 - Ftp:: get_welcome_message
 - Ftp:: kill_session
 - Ftp:: list_ftp
 - Ftp:: list_ftp_with_disk
 - Ftp:: list_sessions
 - Ftp:: passwd
 - Ftp:: server_name
 - Ftp:: set_anonymous_ftp
 - Ftp:: set_anonymous_ftp_incoming
 - Ftp:: set_homedir
 - Ftp:: set_quota
 - Ftp:: set_welcome_message
- ▼ Integration
 - Integration:: fetch_url
- ▼ KnownHosts
 - KnownHosts:: create
 - KnownHosts:: delete
 - KnownHosts:: update
 - KnownHosts:: verify
- ▼ LangPHP
 - LangPHP:: php_get_domain_handler
 - LangPHP:: php_get_impacted_domains

```
7d:f6:c4:72:02:b1:e8:
87:f7:e1:16:71:80:2e:
e7:94:7b:eb:\n

c6:a7:07:36:05:6d:34:
b4:25:74:e9:c2:2c:9e:
3d:bc:97:8e:\n
84:ce:cc:4f:1f:11:67:
ad:30:f6:83:3e:be:bb:
88:48:10:65:\n
    f7:4b:2f:80\n",
    "details": {

"is_self_signed": 1,

"validation_type": "dv
",

"signature_algorithm"
:"sha256WithRSAEncryp
tion",
    "subject": {
        "commonName":
"example.com",

"stateOrProvinceName"
: "Texas",

"organizationName":
"Example",

"emailAddress":
"username@example.com
",

"countryName": "US",

"localityName":
"Houston"
    },
    "modulus": "THE
MODULUS INFORMATION",
    "issuer": {
        "commonName":
"example.com",

"stateOrProvinceName"
: "Texas",

"organizationName":
"Example",

"emailAddress":
```


LangPHP:: php_get_installed_versions

LangPHP:: php_get_system_default_version

LangPHP:: php_get_vhost_versions

LangPHP:: php_ini_get_user_basic_directives

LangPHP:: php_ini_get_user_content

LangPHP:: php_ini_get_user_paths

LangPHP:: php_ini_set_user_basic_directives

LangPHP:: php_ini_set_user_content

LangPHP:: php_set_vhost_versions

▼ LastLogin

LastLogin:: get_last_or_current_logged_in_ip

▼ Locale

Locale:: get_attributes

▼ Mailboxes

Mailboxes:: expunge_mailbox_messages

Mailboxes:: expunge_messages_for_mailbox_guid

Mailboxes:: get_mailbox_status

Mailboxes:: has_utf8_mailbox_names

Mailboxes:: set_utf8_mailbox_names

▼ Market

Market:: cancel_pending_ssl_certificate

Market:: create_shopping_cart

Market:: get_all_products

Market:: get_certificate_status_details

Market:: get_login_url

```
"username@example.com",
"countryName": "US",
"localityName":
"Houston"
},
"not_before":
1365633490,
"not_after":
1397169490,
"domains": [
"example.com"
],
"key_algorithm":
"rsaEncryption",
"id":
"example_com_c69ce_37ff5_1397169490_169c717cb2c260281df792788accf041",
"friendly_name":
"TestCert"
}
}
```

Market:: get_pending_ssl_certificates

Market:: get_provider_specific_dcv_constraints

Market:: get_providers_list

Market:: get_ssl_certificate_if_available

Market:: process_ssl_pending_queue

Market:: request_ssl_certificates

Market:: set_status_of_pending_queue_items

Market:: set_url_after_checkout

Market:: validate_login_token

▼ Mime

Mime:: add_handler

Mime:: add_hotlink

Mime:: add_mime

Mime:: add_redirect

Mime:: delete_handler

Mime:: delete_hotlink

Mime:: delete_mime

Mime:: delete_redirect

Mime:: list_handlers

Mime:: list_hotlinks

Mime:: list_mime

Mime:: list_redirects


Mime:: redirect_info

▼ ModSecurity

ModSecurity:: disable_all_domains

ModSecurity:: disable_domains

ModSecurity:: enable_all_domains

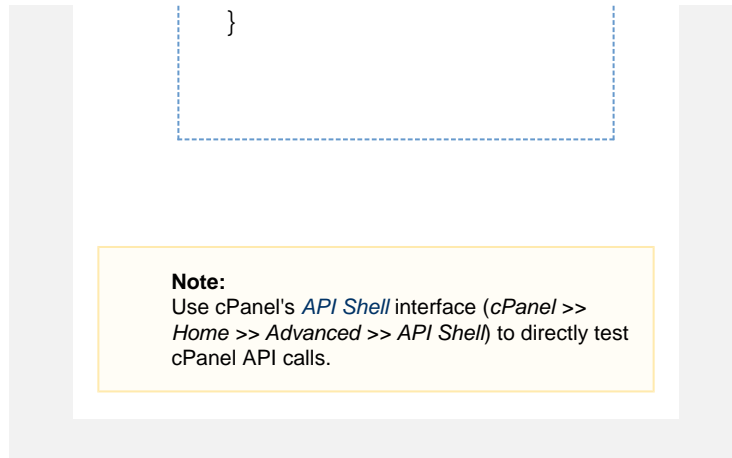

Parameters

Note:
You **must** include one of the following parameters:

Parameter	Type	Description	Possible values	Example
id	string	The certificate's ID.	A valid string.	example_com_c69ce_37ff5_1397169490_169c717cb2c260281df792788accf041
friendly_name	string	The certificate's friendly name.	A valid string.	TestCert

Returns

Return	Type	Description	Possible values	Example
cert	string	The contents of the certificate.	A valid certificate file in Base64 PEM format.	<p>▼ Click to view...</p> <pre> -----BEGIN CERTIFICATE ----- MIIDcTCCAlm gAwIBAgIFAU +BNVgwdQYJK oZIhvcNAQEF BQAwUTESMBA GA1UEAwJ c2lza28udGx kMQswCQYDVQ QGEwJVUzEPM A0GA1UECgwg Y1BhbmVsMQs wCQYDVQOI DAJUWDEQMA4 GA1UEBwwHSG 9lc3RvbjaeF w0xNDEwMDYy MjI2MTIaFw0 xNTEwMDYy MjI2MTIaMFE xEjAQBgNVBA MMCXNjc2tV nRsZDELMAKG A1UEBhMCMVVM xDzANBgNV BAoMBmNQYw5 lbDELMAkGA1 UECAwCVFgxE DAOBgNVBACM B0hvdXN0b24 wggE1MA0G CSqGSIb3DQE </pre>

ModSecurity:: enable_domains

ModSecurity:: has_modsecurity_installed

ModSecurity:: list_domains

▼ Mysql

Mysql:: add_host

Mysql:: add_host_note

Mysql:: check_database

Mysql:: create_database

Mysql:: create_user

Mysql:: delete_database

Mysql:: delete_host

Mysql:: delete_user

Mysql:: get_host_notes

Mysql:: get_privileges_on_database

Mysql:: get_restrictions

Mysql:: get_server_information

Mysql:: locate_server

Mysql:: rename_database

Mysql:: rename_user

Mysql:: repair_database

Mysql:: revoke_access_to_database

Mysql:: set_password

Mysql:: set_privileges_on_database

▼ Notifications

Notifications:: get_notifications_count

▼ NVData

NVData:: get

NVData:: set

BAQUAA4IBDw
AwwgEKAoIBA
QC9zx6zGiHd
mWA0dKtoXmJ
iWXpZ9E3P
Xx3YHs jFEWW
7e5pH0vz+ jV
MzDmm5nsJ7R
XrAkZ01IvpI
pVLvoQFiJOW
VvkD+o9fW
voK1tWJS72F
SgPju+58mA2
ieBuc87A790
Pzuv1P3NR3z
FLAjUR99zkH
R1fpri/da
M3PBW08ET48
FWkyUlKoeZa
ULF67/+wrEi
Ngg+t1qhKOC
AB61PdNVkLa
SGHimksuC
+Czk8Kq9nuS
0E0TCnDt jJE
yJ455FUcaCf
cz1Tb8xkB/F
90Re74yTzD+
v1k0tFMG6
PLj/ajIwWgw
00qmQ8wX3NR
xkWgGz5kV01
wrVJarKQ5EY
Q3/mgvi0v6
dAgMBAAGj
UDBOMB0GA1U
dDgQWBBRw+w
KBo34+bgexj
Aa3EMDsgSCd
7zAfbgNVHSM
EGDAWgBRw
+wKBo34+bg
xjAa3EMDsgS
Cd7zAMBqNVH
RMEBTADAQH/
MA0GCSqGSIb
3DQEBBQUA
A4IBAQCCHRXI
s53opzKM2rM
8Qe81cw524W
K6hqy2EWxZH
p78N7rU7/6D
Q/I3hv3Wh
cDDIO04I2/X
he88MLBaLoM
367Ya+vy7Ca
Lr14aLi/SfQ
szMA0ALBvMa
o+Fis01Vw
FYq/NLgSXw+
fgnpFskt8v8
iQZ+4Kaa18U
8e9sVgu8m0R
g07rzym1eRi
IKpsKdirh
/SD7LbSN7M7
TRL3QqF71tw
9sQhAAsQcRa
BBF21pdWrqh
iGZ+Eioo3hh
gwNavH2ag
qz78ddHwrFp
HFwrEeUk1Of
pPb76MYIce7
xIy/4oQNdG6
fOq41/FrajB
v+WkzDVPa
Km6z7YmwfLN
/YMZBHXSR58
oOGP9W

- ▼ Parser
 - Parser:: firstfile_relative_uri
- ▼ PassengerApps
 - PassengerApps:: disable_application
 - PassengerApps:: edit_application
 - PassengerApps:: enable_application
 - PassengerApps:: ensure_deps
 - PassengerApps:: list_applications
 - PassengerApps:: register_application
 - PassengerApps:: unregister_application
- ▼ PasswdStrength
 - PasswdStrength:: get_required_strength
- ▼ Personalization
 - Personalization:: set
 - Personalization:: get
- ▼ Postgresql
 - Postgresql:: create_database
 - Postgresql:: create_user
 - Postgresql:: delete_database
 - Postgresql:: get_restrictions
 - Postgresql:: grant_all_privileges
 - Postgresql:: rename_database
 - Postgresql:: rename_user
 - Postgresql:: rename_user_no_password
 - Postgresql:: revoke_all_privileges
 - Postgresql:: set_password
- ▼ Pushbullet
 - Pushbullet:: send_test_message

				-----END CERTIFICATE-----
text	string	The parsed information from the OpenSSL command-line tool.	A valid string.	<ul style="list-style-type: none"> ▼ Click to view... <pre> Certificate :\n Data:\n Version: 3 (0x2)\n Serial Number:\n d1:e8:74:8c :d0:69:d2:5 5\n Signature Algorithm: sha1WithRSA Encryption\n Issuer: CN = example.com , C = US, emailAddress s = username@ex ample.com, O = Example, ST = Texas, L = Houston\n Validity\n Not Before: Apr 10 22:38:10 2013 GMT\n Not After : Apr 10 22:38:10 2014 GMT\n Subject: CN = example.com , C = US, emailAddress s = username@ex ample.com, O = Example, ST = Texas, L = Houston\n Subject Public Key Info:\n Public Key Algorithm: rsaEncrypti on\n Public-Key: (2048 bit)\n Modulus:\n 00:c6:9c:e3 :37:1a:fc:e 6:1b:e4:29: 4d:8e:ee:ec :\n bd:7a:52:12 :ef: 34:71:64:77 :e0:79:76:6 d:ba:f0:\n 77:fd:f0:92 :18:b0:84:c 3:f7:12:3a: a9:b9:1d:16 :\n 6c:a0:10:6d :f0:55:17:3 5:27:ff:81: a7:46:e6:d4 :\n 36:97:34:01 :3a:2f:6d:6 1:9a: 04:20:e3:fd :06:11:\n 8b:a4:5e:4f :6d:0d:93:8 e:3b:cc:cb: 19:b3:cb:74 :\n 7a:54:82:ae :52:9e:46:3 1:7a:02:44: 0b:7b:26:e8 :\n 84:aa:91:2b </pre>

- Quota:: get_quota_info
- Resellers:: list_accounts
- ResourceUsage:: get_usages
- Restore:: directory_listing
 - Restore:: get_users
 - Restore:: query_file_info
 - Restore:: restore_file
- Session:: create_temp_user
- SiteTemplates:: list_site_templates
 - SiteTemplates:: list_user_settings
 - SiteTemplates:: publish
- SpamAssassin:: clear_spam_box
 - SpamAssassin:: get_symbolic_test_names
 - SpamAssassin:: get_user_preferences
 - SpamAssassin:: update_user_preference
- SSH:: get_port
- SSL:: add_autossl_excluded_domains
 - SSL:: can_ssl_redirect
 - SSL:: check_shared_cert
 - SSL:: delete_cert
 - SSL:: delete_csr
 - SSL:: delete_key

```

:25:c1:42:0
c:cc:5d:c4:
d5:
c4:cf:df:\n

de:4c:7c:22
:99:ab:06:7
9:99:16:1e:
a7:49:5b:9b
:\n
89:97:18:3c
:1e:4b:c6:c
5:b5:b2:9d:
7d:be:b9:91
:\n
c6:08:38:7d
:dc:81:18:2
b:0c:2c:da:
29:f4:aa:a2
:\n
72:46:d9:c2
:68:31:89:5
1:ab:32:af:
7a:8d:9b:a7
:\n
d8:b8:b5:37
:21:03:91:1
d:4e:d8:fc:
f1:0e:1f:96
:\n
17:d6:90:25
:c1:3a:1a:7
6:4c:9e:2b:
7e:b9:9c:f5
:\n
86:0a:cf:ea
:
2f:eb:bc:33
:ee:69:49:b
9:c2:e6:a0:
\n
ef:ee:90:19
:4a:2a:64:7
e:ef:96:46:
7e:7d:e2:35
:\n
ec:d9:cf:34
:42:7a:3d:c
1:22:b9:68:
a2:b3:02:a3
:\n 7f:f5\n
Exponent:
65537
(0x10001)\n
X509v3
extensions:
\n
X509v3
Subject Key
Identifier:
\n
6A:A1:EA:62
:FB:B2:C4:A
C:04:B0:43:
DD:56:BE:8A
:8D:FA:16:D
3:F4\n
X509v3
Authority
Key
Identifier:
\n
keyid:6A:A1
:EA:62:FB:B
2:C4:AC:04:
B0:43:DD:56
:BE:8A:8D:F
A:16:D3:F4\
\n\n
X509v3
Basic
Constraints
: \n
CA:TRUE\n
Signature
Algorithm:
sha1WithRSA
Encryption\
n
3c:1e:f7:3d
:20:1b:a2:b
d:5c:d6:0f:
2a:9e:f3:b0
:83:bf:a9:\
n
a0:90:9b:96
:b1:a6:1e:8
b:be:7c:f5:
72:58:a0:48
:3e:68:
43:\n
06:37:63:0a
:cb:9c:23:9

```

SSL:: delete_ssl
SSL:: disable_mail_sni
SSL:: enable_mail_sni
SSL:: fetch_best_for_domain
SSL:: fetch_certificate_for_fqdns
SSL:: fetch_key_and_certificate
SSL:: find_certificates_for_key
SSL:: find_csrs_for_key
SSL:: generate_certificate
SSL:: generate_csr
SSL:: generate_key
SSL:: get_autossl_excluded_domains
SSL:: get_autossl_pending_queue
SSL:: get_autossl_problems
SSL:: get_certificate
SSL:: get_cn_name
SSL:: install_ssl
SSL:: installed_hosts
SSL:: installed_hosts
SSL:: is_autossl_check_in_progress
SSL:: is_mail_sni_supported
SSL:: is_sni_supported
SSL:: list_certs
SSL:: list_csrs
SSL:: list_keys
SSL:: list_ssl_items
SSL:: mail_sni_status

8:c6:9e:f1:
73:e8:4b:71:
:ac:07:fc:\n
d0:5c:e1:55:
:4f:be:a7:7
5:5a:57:da:
a1:c2:46:63:
:8f:3a:70:\n
n
4c:42:3c:03:
:4c:a0:47:a
3:fc:
ae:15:03:25:
:a5:78:63:a
2:73:\n
cd:47:d5:64:
:7c:d4:f5:8
5:f7:03:b8:
b4:d8:95:75:
:6a:78:5c:\n
n
e6:c7:69:02:
:7b:a4:fc:4
d:8c:80:7b:
c7:1c:71:04:
:ba:53:71:\n
n 7a:
ce:00:cb:0e:
:5e:21:89:0
2:ba:90:02:
8e:b5:79:8e:
:84:50:\n
b0:21:63:b0:
:ac:19:80:c
5:1d:a2:95:
68:b7:ee:35:
:10:fa:db:\n
n
f5:bf:b0:16:
:b1:34:76:f
2:d6:ee:07:
3b:6d:b6:0c:
:1d:b4:e5:\n
n
53:50:23:b8:
:c4:bf:fe:d
6:77:ec:89:
68:a0:d8:dd:
:f4:f5:fa:\n
n
7d:f6:c4:72:
:02:b1:e8:8
7:f7:e1:16:
71:80:2e:e7:
:94:7b:eb:\n
n
c6:a7:07:36:
:05:6d:34:b
4:25:74:e9:
c2:2c:9e:3d:
:bc:97:8e:\n
n
84:ce:cc:4f:
:1f:11:67:a
d:30:f6:83:
3e:be:bb:88:
:48:10:65:\n

tus

SSL:: rebuild_mail
_sni_config

SSL:: rebuildssldb

SSL:: remove_aut
ossl_excluded_do
mains

SSL:: set_autossl_
excluded_domains

SSL:: set_cert_frie
ndly_name

SSL:: set_csr_frien
dly_name

SSL:: set_key_frie
ndly_name

SSL:: set_primary
_ssl

SSL:: set_ssl_shar
e

SSL:: show_cert

SSL:: show_csr

SSL:: show_key

SSL:: start_autossl
_check

SSL:: toggle_ssl_r
edirects_for_doma
ins

SSL:: upload_cert

SSL:: upload_key

▼ StatsBar

StatsBar:: get_stat
s

▼ Styles

Styles:: current

Styles:: list

Styles:: set_default

Styles:: update

▼ SubDomain

SubDomain:: adds
ubdomain

▼ Themes

Themes:: get_the
me_base

Themes:: list

Themes:: update

▼ Tokens

Tokens:: create_fu
ll_access

Tokens:: list

				n f7:4b:2f:80 \n
details	hash	A hash of the certificate's details.	This hash includes the <code>is_self_signed</code> , <code>modulus</code> , <code>notbefore</code> , <code>notafter</code> , <code>domains</code> , and <code>key_algorithm</code> , <code>signature_algorithm</code> , and <code>validation_type</code> returns and the subject and issuer hashes.	
is_self_signed	Boolean	Whether the certificate is self-signed. The function returns this value in the <code>details</code> hash.	<ul style="list-style-type: none"> 1 — Self-signed. 0 — Not self-signed. 	1
validation_type	string	The certificate's validation type. <div style="border: 1px solid orange; padding: 5px; margin: 5px 0;"> Note: We introduced this return in cPanel & WHM version 56. </div> The function returns this value in the <code>details</code> hash.	<ul style="list-style-type: none"> ev — Extended Validation. ov — Organization Validation. dv — Domain Validation. undef — The system could not parse and determine the certificate's validation type. 	dv
signature_algorithm	string	The signature algorithm of the certificate. <div style="border: 1px solid orange; padding: 5px; margin: 5px 0;"> Note: We introduced this return in cPanel & WHM version 56. </div> The function returns this value in the <code>details</code> hash.	A valid OID hash algorithm name.	sha256WithRSAEncryption
subject	hash	A hash of the certificate's ownership details. The function returns this hash in the <code>details</code> hash.	This hash includes the <code>commonName</code> , <code>stateOrProvinceName</code> , <code>organizationName</code> , <code>emailAddress</code> , <code>countryName</code> , and <code>localityName</code> returns.	
commonName	string	The certificate's Common Name or Distinguished Name. The function returns this value in the <code>subject</code> hash.	A valid domain name.	example.com
stateOrProvinceName	string	The certificate's state or province name. The function returns this value in the <code>subject</code> hash.	A valid string.	Texas

Tokens:: rename

Tokens:: revoke

TwoFactorAuth

TwoFactorAuth:: generate_user_configuration

TwoFactorAuth:: get_user_configuration

TwoFactorAuth:: remove_user_configuration

TwoFactorAuth:: set_user_configuration

UserManager

UserManager:: check_account_conflicts

UserManager:: create_user

UserManager:: delete_user

UserManager:: dismiss_user

UserManager:: edit_user

UserManager:: list_users

UserManager:: lookup_service_account

UserManager:: lookup_user

UserManager:: merge_service_account

UserManager:: unlink_service_account

UserTasks

UserTasks:: delete

UserTasks:: retrieve

VersionControl

VersionControl:: create

VersionControl:: delete

VersionControl:: retrieve

VersionControl:: update

VersionControlDepl

	organizationName	string	The certificate's organization name. The function returns this value in the subject hash.	A valid string.	Organization
	emailAddress	string	The certificate's email address. The function returns this value in the subject hash.	A valid email address.	username@example.com
	countryName	string	The certificate's country. The function returns this value in the subject hash.	A valid two-letter ISO-3166 country code.	US
	localityName	string	The certificate's locality or city. The function returns this value in the subject hash.	A valid string.	Houston
	modulus	string	The certificate's modulus. The function returns this value in the details hash.	A valid string.	Click to view... a74f7636fa6ac93ee6836a83a995b55deb5019ea36d7ba3dafb00e38d693acdb0c81b2ff77d6b433a420fae523f127f352a68bcc8b8f2d6ee7b70395bafabd8237ada8164fdddf8376b30375c35d4d4cbce7d33d08069c17b409176a3689f1ebc97c0b08fe6ae44c19a92ac6d68448e7f1d13f3b360affd4222a51b4f35342de99b5a1fb5548e438f2d824664562a448002eed7fce24dedc7dc3e1ed179973d1dae959b33716eeb410d172708954e00632cbf60a0e26419860c8c0bc285d6bfe4b479de0dd189772a5dae676bd2a92acccc1369821be8cffddd8a7e6ecc061f8a32a9ae0661e4e946ed8e3827b277138d3a76116567cbd129cbd869ef9dddf
	issuer	hash	A hash of the issuer's details. The function returns this value in the details hash.	This hash includes the commonName, stateOrProvinceName, organizationName, emailAddress, countryName, and localityName returns.	
	commonName	string	The issuer's Common Name or Distinguished Name. The function returns this value in the issuer hash.	A valid domain name.	example.com

oyment

VersionControlDeployment:: **create**

VersionControlDeployment:: **delete**

VersionControlDeployment:: **retrieve**

WebDisk

WebDisk:: **delete_user**

WebDisk:: **set_home_dir**

WebDisk:: **set_password**

WebDisk:: **set_permissions**

WebmailApps

WebmailApps:: **list_webmailapps**

WebVhosts

WebVhost:: **list_domains**

WebVhost:: **list_ssl_capable_domains**

WordPressBackup

WordPressBackup:: **any_running**

WordPressBackup:: **cancel**

WordPressBackup:: **cleanup**

WordPressBackup:: **get_available_backups**

WordPressBackup:: **is_running**

WordPressBackup:: **start**

WordPressInstanceManager

WordPressInstanceManager:: **cancel_scan**

WordPressInstanceManager:: **cleanup_scan**

WordPressInstanceManager:: **change_admin_password**

WordPressInstanceManager:: **configure_autoupdate**

WordPressInstanceManager:: **get_ap**

stateOrProvinceName	string	The issuer's state or province name. The function returns this value in the issuer hash.	A valid string.	Texas
organizationName	string	The issuer's organization name. The function returns this value in the issuer hash.	A valid string.	Organization
emailAddress	string	The issuer's email address. The function returns this value in the issuer hash.	A valid email address.	username@example.com
countryName	string	The certificate's country. The function returns this value in the issuer hash.	A valid two-letter ISO-3166 country code.	US
localityName	string	The issuer's locality or city. The function returns this value in the issuer hash.	A valid string.	Houston
notBefore	integer	The certificate's start time. The function returns this value in the details hash.	A date in Unix time format.	1365633490
notAfter	integer	The certificate's expiration time. The function returns this value in the details hash.	A date in Unix time format.	1397169490
domains	string	The certificate's domains or list of domains. The function returns this value in the details hash.	A valid domain or list of domains.	example.com
keyAlgorithm	string	The certificate's method of encryption. The function returns this value in the details hash.	A valid string.	rsaEncryption
id	string	The certificate's ID.	A valid string.	Click to view... example_com_c69ce_37ff5_1397169490_169c717cb2c260281df792788accf041
friendlyName	string	The certificate's friendly name.	A valid string.	TestCert

i_version

WordPressInstanceManager:: **get_instance_by_id**

WordPressInstanceManager:: **get_instances**

WordPressInstanceManager:: **get_latest_wordpress_version_from_wordpress_org**

WordPressInstanceManager:: **get_scan_results**

WordPressInstanceManager:: **is_installable_addon_available**

WordPressInstanceManager:: **start_scan**

▼ WordPressRestore

WordPressRestore:: **any_running**

WordPressRestore:: **cleanup**

WordPressRestore:: **start**