

cPanel API 2 Functions - CustInfo::displaycontactinfo

Guide to cPanel API 2

Return Data

Filter and Sort Output

Paginate Output

Output Columns

Calls from the WHM API

cPanel Tags (deprecated)

AddonDomain:: adddondomain

omain

AddonDomain:: listaddondomain

AddonDomain:: listaddondomains

Backups

Backups:: listfullbackups

Bandwidth

Bandwidth:: addhttpbandwidth

Bandwidth:: getbwdata

Bandwidth:: gethourlyaveragebwoveryear

BoxTrapper

BoxTrapper:: accountmanagelist

Branding

Branding:: addbrandingobj

Branding:: applist

Branding:: brandingeditor

Branding:: createpkg

Branding:: cssmerge

Branding:: delbrandingobj

Branding:: delpkg

Description

This function displays an account's contact and notification settings.

Warning:

We **strongly** recommend that you use [UAPI](#) instead of cPanel API 2. However, no equivalent UAPI function exists.

Examples

WHM API (JSON)

```
https://hostname.example.com:2087/cpsess#####/json-api/cpanel?cpanel_jsonapi_user=user&cpanel_jsonapi_version=2&cpanel_jsonapi_module=CustInfo&cpanel_jsonapi_function=displaycontactinfo
```

Note:

For more information, read our [Calls from the WHM API](#) documentation.

Function information

About this module

The `CustInfo` module manages the account's notifications and contact information.

Branding:: gensprites

Branding:: getbrandingpkg

Branding:: getbrandingpkgstatus

Branding:: getdefaultbrandingpkg

Branding:: installbrandingpkgs

Branding:: installimages

Branding:: killimages

Branding:: listingtypes

Branding:: listobjecttypes

Branding:: preloadconf

Branding:: resetall

Branding:: resetscss

Branding:: resethtml

Branding:: resolvefile

Branding:: resolveocalcss

Branding:: saveocalcss

Branding:: setbrandingpkgstatus

Branding:: showpackages

Branding:: spriteslist

▼ CSVImport

CSVImport:: columnchoices

CSVImport:: configimport

CSVImport:: data

CSVImport:: fetchimportdata

CSVImport:: isenabled

CSVImport:: loaddata

CSVImport:: processdata

CSVImport:: sendcontact

▼ LiveAPI PHP Class

```
$cpanel = new  
CPANEL(); // Connect  
to cPanel - only do  
this once.
```

```
// Display contact  
information.  
$display_contact =  
$cpanel->api2(  
    'CustInfo',  
    'displaycontactinfo'  
);
```

Note:

For more information, read our [Guide to the LiveAPI System](#).

▼ LiveAPI Perl Module

```
my $cpliveapi =  
Cpanel::LiveAPI->new(  
); # Connect to  
cPanel - only do this  
once.
```

```
# Display contact  
information.  
my $display_contact =  
$cpliveapi->api2(  
    'CustInfo',  
    'displaycontactinfo',  
);
```

Note:

For more information, read our [Guide to the LiveAPI System](#).

About cPanel API 2

cPanel API 2 accesses and modifies data for cPanel accounts.

Notes:

- The *Fe*

int
• Ur
mu
us
or
20
)'.
20
or
20
)'.

Find a function

- CSVImport:: uploadimport
- Contactus
 - Contactus:: isenabled
 - Contactus:: sendcontact
 - Cron
 - Cron:: add_line
 - Cron:: edit_line
 - Cron:: fetchcron
 - Cron:: get_email
 - Cron:: listcron
 - Cron:: remove_line
 - Cron:: set_email
 - CustInfo
 - CustInfo:: contactemails
 - CustInfo:: contactprefs
 - CustInfo:: displaycontactinfo
 - CustInfo:: savecontactinfo
 - DBmap
 - DBmap:: status
 - DBmap:: version
 - DKIMUI
 - DKIMUI:: available
 - DKIMUI:: getrecords
 - DKIMUI:: install
 - DKIMUI:: installed
 - DKIMUI:: uninstall
 - DenyIp
 - DenyIp:: listdenyps
 - DiskCounter
 - DiskCounter:: disk_counter
 - DiskUsage
 - DiskUsage:: buildcache
 - DiskUsage:: clearcache
 - DiskUsage:: fetch_raw_disk_usage
 - DiskUsage:: fetchdiskusage

▼ cPanel Tag System (deprecated)

Warnings:

- In cPanel & WHM version 11.30 and later, cPanel tags are **deprecated**. We **strongly** recommend that you **only** use the [LiveAPI](#) system to call the cPanel APIs. Examples are **only** present in order to help developers move from the old cPanel tag system to our [LiveAPI](#).
- cPanel API 2 calls that use cPanel tags vary in code syntax and in their output.
- For more information, read our [Deprecated cPanel Tag Usage](#) documentation.

▼ Command Line

```
cpapi2
--user=username
CustInfo
displaycontactinfo
```

Notes:

- You **must** URI-encode values.
- username represents your account-level username.
- You **must** run the `--user=username` command.
- For more information and additional output options, read our [Guide to cPanel API 2](#) documentation or run the `cpapi2 --help` command.
- If you run CloudLinux™, you **must** use the full path of the `cpapi2` command:

```
/usr/local
/cpanel/bin/cpapi2
```

▼ Output (JSON)

```
{
  "cpanelresult": {
    "apiversion": 2,

    "func": "displaycontactinfo",
    "data": [
```

- cPanel API 2 Functions - Contactus::isenabled — This function checks whether the account's contact option is enabled.
- cPanel API 2 Functions - CustInfo::displaycontactinfo — This function displays an account's contact and notification settings.

```

DiskUsage:: fetchd
iskusagewithextras

▼ DnsLookup
  DnsLookup:: name
  2ip

▼ DomainLookup
  DomainLookup:: c
  ountbaseddomains

  DomainLookup:: g
  etbaseddomains

  DomainLookup:: g
  etdocroot

  DomainLookup:: g
  etdocroots

  DomainLookup:: g
  etmaindomain

▼ Email
  Email:: accountna
  me

  Email:: adddomain
  forward

  Email:: addforward

  Email:: addmx

  Email:: addpop

  Email:: browsebox
  es

  Email:: changemx

  Email:: checkmain
  discard

  Email:: clearpopca
  che

  Email:: deletefilter

  Email:: delforward

  Email:: delmx

  Email:: delpop

  Email:: disablefilter

  Email:: editquota

  Email:: enablefilter

  Email:: fetchautore
  sponder

  Email:: fetchcharm
  aps

  Email:: filteractions

  Email:: filterlist

  Email:: filtername

  Email:: filterrules

  Email:: get_archivi
  ng_configuration

```

```

{

"value": "username@exa
mple.com",

"name": "email",

"descp": "This is an
email address at
which the system can
contact you. This
should be an email
address that is not
on your account.",

"type": "string",

"enabled": 1
},
{

"value": "username.2@e
xample.com",

"name": "second_email"
,

"descp": "If you wish
to provide a second
email address to
receive
notifications, enter
it here.",

"type": "string",

"enabled": 1
},
{

"value": 1,

"name": "notify_contac
t_address_change",

"descp": "My contact
email address
changes.",

"type": "boolean",

"enabled": 1
},

```

- cPanel API 2 Functions - Cutoff: save contact info — This function modifies an account's contact and notification settings.
- cPanel API 2 Functions - Cutoff: contact emails — This function retrieves the account's primary and secondary email addresses.

Email: get_archiving_default_configuration
Email: get_archiving_types
Email: get_default_email_quota
Email: get_email_signing
Email: get_max_email_quota
Email: getalwaysaccepted
Email: getdiskusage
Email: getmxcheck
Email: has_delegated_mailman_lists
Email: list_system_filter_info
Email: listaliasbackups
Email: listautoresponders
Email: listdefaultaddresses
Email: listdomainforwards
Email: listfilterbackups
Email: listfilters
Email: listforwards
Email: listlists
Email: listmaildomains
Email: listmx
Email: listmxs
Email: listpops
Email: listpopssingle
Email: listpopswitchdisk
Email: listpopswitchimage
Email: loadfilter
Email: passwdpop

```
{  
  "value":1,  
  "name":"notify_contact_address_change_notification_disabled",  
  "descp":"My preference for contact email address change notifications is disabled.",  
  "type":"boolean",  
  "enabled":1  
},  
{  
  "value":1,  
  "name":"notify_disk_limit",  
  "descp":"My account approaches its disk quota.",  
  "type":"boolean",  
  "enabled":1  
},  
{  
  "value":1,  
  "name":"notify_bandwidth_limit",  
  "descp":"My account approaches its bandwidth usage limit.",  
  "type":"boolean",  
  "enabled":1  
},  
{  
  "value":1,
```

Email:: reorderfilters
Email:: set_archiving_configuration
Email:: set_archiving_default_configuration
Email:: set_email_signing
Email:: setalwaysaccept
Email:: setdefaultaddress
Email:: setmxcheck
Email:: storefilter
Email:: tracefilter
▼ EmailTrack
 EmailTrack:: search
 EmailTrack:: stats
 EmailTrack:: trace
▼ Encoding
 Encoding:: get_encodings
 Encoding:: guess_file
 Encoding:: guess_file_opts
▼ FSTest
 FSTest:: dirisempty
▼ Fileman
 Fileman:: autocompletedir
 Fileman:: fileop
 Fileman:: getabsdir
 Fileman:: getdir
 Fileman:: getdiractions
 Fileman:: getdiskinfo
 Fileman:: geteditty
 Fileman:: getfileactions
 Fileman:: getpath
 Fileman:: listfiles
 Fileman:: mkdir
 Fileman:: mkfile

```
"name": "notify_email_quota_limit",  
  
"desc": "Any of my account's email accounts approaches or is over quota.",  
  
"type": "boolean",  
  
"enabled": 1  
    },  
    {  
  
"value": 1,  
  
"name": "notify_password_change",  
  
"desc": "My account's password changes.",  
  
"type": "boolean",  
  
"enabled": 1  
    },  
    {  
  
"value": 1,  
  
"name": "notify_password_change_notification_disabled",  
  
"desc": "My preference for account password change notifications is disabled.",  
  
"type": "boolean",  
  
"enabled": 1  
    }  
  ],  
  "event": {  
    "result": 1  
  },  
  
"module": "CustInfo"
```

Fileman:: savefile
 Fileman:: search
 Fileman:: statfiles
 Fileman:: uploadfiles
 Fileman:: viewfile

ForcePassword
 ForcePassword:: get_force_password_flags
 ForcePassword:: update_force_password_flags

Frontpage
 Frontpage:: fpenabled
 Frontpage:: list

Ftp
 Ftp:: addftp
 Ftp:: delftp
 Ftp:: listftp
 Ftp:: listftpsessions
 Ftp:: listftpwithdisk
 Ftp:: passwd
 Ftp:: setquota

Gpg
 Gpg:: listgpgkeys
 Gpg:: listsecretgpgkeys
 Gpg:: number_of_private_keys
 Gpg:: number_of_public_keys


Htaccess
 Htaccess:: listusers
 Htaccess:: listusers

HttpUtils
 HttpUtils:: getdirindices

ImageManager
 ImageManager:: thumbnail

LVEInfo
 LVEInfo:: getUsage

LangMods
 LangMods:: getarchname

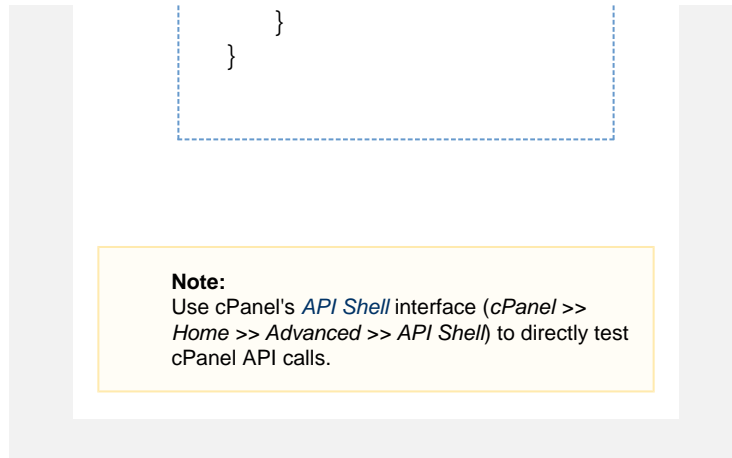

Parameters

This function does not accept parameters.

Returns

Return	Type	Description	Possible values	Example
enabled	<i>Boolean</i>	Whether the notification setting is enabled.	<ul style="list-style-type: none"> 1 — Send notification . 0 — Do not send notification . 	1
value	<i>string</i>	The notification setting's value.	<ul style="list-style-type: none"> A Boolean value, if the type value is <code>boolean</code>. A string value, if the type value is <code>string</code>. 	1
type	<i>string</i>	The notification setting's data type.	<ul style="list-style-type: none"> <code>string</code> <code>boolean</code> 	<code>string</code>

LangMods:: [getkey](#)

LangMods:: [getprefix](#)

LangMods:: [install](#)

LangMods:: [langlist](#)

LangMods:: [list_available](#)

LangMods:: [list_installed](#)

LangMods:: [magic_status](#)

LangMods:: [pre_run](#)

LangMods:: [search](#)

LangMods:: [setup](#)

LangMods:: [uninstall](#)

LangMods:: [update](#)

▼ [LeechProtect](#)

LeechProtect:: [setup](#)

▼ [Locale](#)

Locale:: [get_encoding](#)

Locale:: [get_html_dir_attr](#)

Locale:: [get_locale_name](#)

Locale:: [get_user_locale](#)

Locale:: [get_user_locale_name](#)

Locale:: [numf](#)

▼ [Logaholic](#)

Logaholic:: [adduser](#)

Logaholic:: [adduserprofile](#)

Logaholic:: [deleteuser](#)

Logaholic:: [deleteuserprofile](#)

Logaholic:: [edituser](#)

Logaholic:: [fetchuser](#)

Logaholic:: [listuserprofiles](#)

Logaholic:: [logahol](#)

	<i>descp</i>	<i>string</i>	The notification setting's description.	A valid string.	▼ Click to view... This is an email address at which the system can contact you. This should be an email address that is not on your account.
	<i>name</i>	<i>string</i>	The notification setting's name.	<ul style="list-style-type: none"> • email • second_email • notify_disk_limit • notify_bandwidth_limit • notify_contact_address_change • notify_contact_address_change_notification_disabled • notify_email_quota_limit • notify_password_change • notify_password_change_notification_disabled 	<i>second_email</i>
	<i>reason</i>	<i>string</i>	A reason for failure. <div style="border: 1px solid orange; padding: 5px; margin-top: 10px;"> <p>Note: This function only returns a reason value if it failed.</p> </div>	A string that describes the error.	This is an error message.

iclink

Logaholic:: proces
sstats

▼ Mime

Mime:: list_hotlinks

Mime:: listhandlers

Mime:: listmime

Mime:: listredirects

Mime:: redirectna
me

Mime:: redirecturln
ame

▼ MysqlFE

MysqlFE:: authoriz
ehost

MysqlFE:: change
dbuserpassword

MysqlFE:: created
b

MysqlFE:: created
buser

MysqlFE:: dbusere
xists

MysqlFE:: deautho
rizehost

MysqlFE:: deleted
b

MysqlFE:: deleted
buser

MysqlFE:: getalldb
sinfo

MysqlFE:: getalldb
usersanddbs

MysqlFE:: getdbus
erprivileges

MysqlFE:: getdbus
ers

MysqlFE:: gethosts

MysqlFE:: getmys
qlprivileges

MysqlFE:: getmys
qlserverprivileges

MysqlFE:: has_my
cnf_for_cpuser

MysqlFE:: listdbs

MysqlFE:: listdbsb
ackup

MysqlFE:: listhosts

MysqlFE:: listusers

MysqlFE:: listusers

result	<i>Boolean</i>	Whether the function succeeded.	<ul style="list-style-type: none"> • 1 — The function succeeded • 0 — The function failed. 	1
--------	----------------	---------------------------------	--	---

indb

MysqlFE:: revoked
buserprivileges

MysqlFE:: setdbu
erprivileges

MysqlFE:: userdbp
rivs

▼ MysqlOptimizer

MysqlOptimizer:: f
etch_slow_queries

▼ NVData

NVData:: get

NVData:: set

NVData:: setall

▼ Net

Net:: dnszone

Net:: traceroute

▼ News

News:: does_news
_exist

News:: does_news
_type_exist

News:: get_news

▼ PHPINI

PHPINI:: getallopti
ons

PHPINI:: getoption
s

▼ Park

Park:: listaddondo
mains

Park:: listparkeddo
mains

Park:: park

Park:: unpark

▼ Passwd

Passwd:: change_
password

Passwd:: set_dige
st_auth

▼ PasswdStrength

PasswdStrength::
appstrengths

PasswdStrength::
get_password_stre
ngth

PasswdStrength::
get_required_stren
gth

▼ Postgres

Postgres:: listdbs

Postgres:: listusers

Postgres:: listusers
indb

Postgres:: userexists

▼ Rand

Rand:: getranddata

▼ Resellers

Resellers:: get_sub_accounts

▼ RoR

RoR:: addapp

RoR:: changeapp

RoR:: importrails

RoR:: listapps

RoR:: listrewrites

RoR:: needsimport

RoR:: removeapp

RoR:: removerewrite

RoR:: restartapp

RoR:: setuprewrite

RoR:: softrestartapp

RoR:: startapp

RoR:: stopapp

▼ SetLang

SetLang:: setlocale

▼ SourceIPCheck

SourceIPCheck:: addip

SourceIPCheck:: delip

SourceIPCheck:: getaccount

SourceIPCheck:: listips

SourceIPCheck:: loadsecquestions

SourceIPCheck:: resetsecquestions

SourceIPCheck:: samplequestions

SourceIPCheck:: savequestions

▼ SPFUI

SPFUI:: available

SPFUI:: count_settings

SPFUI:: entries_complete

SPFUI:: get_raw_record

SPFUI:: getmainserverip

SPFUI:: install

SPFUI:: installed

SPFUI:: list_settings

SPFUI:: load_current_values

SPFUI:: uninstall

▼ SSH

SSH:: authkey

SSH:: converttopk

SSH:: delkey

SSH:: fetchkey

SSH:: genkey

SSH:: genkey_legacy

SSH:: importkey

SSH:: listkeys

▼ SSL

SSL:: fetchcertificate

SSL:: fetchinfo

SSL:: genctr

SSL:: gencsr

SSL:: genkey

SSL:: getcnname

SSL:: installssl

SSL:: listcrts

SSL:: listcsrs

SSL:: listkeys

SSL:: listsslitems

SSL:: uploadcrt

SSL:: uploadkey

▼ SSLInfo

SSLInfo:: fetchinfo

▼ StatCache

StatCache:: clearcache

▼ Stats

- Stats:: getmonthly bandwidth
- Stats:: getmonthly domainbandwidth
- Stats:: getthismont hsbwusage
- Stats:: lastapache hits
- Stats:: lastvisitors
- Stats:: listanalog
- Stats:: listawstats
- Stats:: listlastvisitors
- Stats:: listrawlogs
- Stats:: listurchin
- Stats:: listwebalizer

▼ StatsBar

- StatsBar:: getrowcounter
- StatsBar:: rowcounter
- StatsBar:: setrowcounter
- StatsBar:: stat

▼ SubDomain

- SubDomain:: adds ubdomain
- SubDomain:: changedocroot
- SubDomain:: delsubdomain
- SubDomain:: getservedsubdomains
- SubDomain:: listsubdomains
- SubDomain:: validregex

▼ Themes

- Themes:: apply_new_theme
- Themes:: does_cpanel_theme_exist
- Themes:: get_available_themes
- Themes:: get_themes_list
- Themes:: restore_saved_theme

▼ UI

- UI:: dynamicincludelist
- UI:: includelist
- UI:: listform
- UI:: paginate
- UI:: paginate_list

▼ UserHttpUtils

- UserHttpUtils:: getdirindices

▼ WebDisk

- WebDisk:: addwebdisk
- WebDisk:: delwebdisk
- WebDisk:: hasdigest
- WebDisk:: listwebdisks
- WebDisk:: passwdwebdisk
- WebDisk:: set_digest_auth
- WebDisk:: set_homedir
- WebDisk:: set_perms
- WebDisk:: setstatus

▼ WebmailApps

- WebmailApps:: listwebmailapps

▼ ZoneEdit

- ZoneEdit:: add_zone_record
- ZoneEdit:: edit_zone_record
- ZoneEdit:: fetch_cpanel_generated_domains
- ZoneEdit:: fetchzone
- ZoneEdit:: fetchzone_records
- ZoneEdit:: fetchzones
- ZoneEdit:: get_zone_record
- ZoneEdit:: remove_zone_record
- ZoneEdit:: resetzone

