

# UAPI Functions - Branding::get\_applications

## Guide to UAPI

- Return Data
- Filter Output
- Sort Output
- Paginate Output
- Output Columns
- Calls from the WHM API
- Custom UAPI Modules

Backup  
Backup::  
fullbacku

p\_to\_ftp

Backup:: fullbacku  
p\_to\_homedir

Backup:: fullbacku  
p\_to\_scp\_with\_key

Backup:: fullbacku  
p\_to\_scp\_with\_password

Backup:: list\_backups

### Bandwidth

Bandwidth:: get\_enabled\_protocols

Bandwidth:: get\_retention\_periods

Bandwidth:: query

### Batch

Batch:: strict

### Brand

Brand:: read

### Branding

Branding:: file

Branding:: get\_applications

Branding:: get\_application\_information

Branding:: get\_available\_applications

Branding:: get\_information\_for\_applications

## Description

This function retrieves an application's information from a specific theme's `dynamicui.i.conf` file.

## Examples

### ▼ cPanel or Webmail Session URL

```
https://hostname.example.com:2083/cpsess#####/execute/Branding/get_applications?&app_keys=addon_domains,ftp_accounts,anonymous_ftp
```

#### Note:

This example calls the UAPI function via a cPanel session. For more information, read our [Guide to UAPI](#) documentation.

## Function information

## About this module

The Branding module accesses cPanel's theming system.

## About UAPI

UAPI accesses and modifies data for cPanel accounts.

- Branding:: image
- Branding:: include
- Branding:: spritelist
- CacheBuster
  - CacheBuster:: read
  - CacheBuster:: update
- Chkservd
  - Chkservd:: get\_exim\_ports
  - Chkservd:: get\_exim\_ports\_ssl
- Chrome
  - Chrome:: get\_dom
- Contactus
  - Contactus:: is\_enabled
- cPAddons
  - cPAddons:: get\_available\_addons
  - cPAddons:: get\_instance\_settings
  - cPAddons:: list\_addon\_instances
- cPGreyList
  - cPGreyList:: disable\_all\_domains
  - cPGreyList:: disable\_domains
  - cPGreyList:: enable\_all\_domains
  - cPGreyList:: enable\_domains
  - cPGreyList:: has\_greylisting\_enabled
  - cPGreyList:: list\_domains
- DAV
  - DAV:: disable\_shared\_global\_addressbook
  - DAV:: enable\_shared\_global\_addressbook
  - DAV:: get\_calendar\_contacts\_config
  - DAV:: has\_shared\_global\_addressbook
  - DAV:: is\_dav\_service\_enabled

## LiveAPI PHP Class

```

$cpanel = new
CPANEL(); // Connect
to cPanel - only do
this once.

// Get the
dynamicui.conf
settings for Addon
Domains, FTP
Accounts, and
Anonymous FTP.
$app_info =
$cpanel->uapi(
    'Branding',
    'get_applications',
    array(
        'app_keys' =>
        'addon_domains,ftp_ac
counts,anonymous_ftp'
    )
);

```

**Note:**  
For more information, read our [Guide to the LiveAPI System](#).

**Notes:**

- Th  
Fe
- int
- Ur  
mu  
us  
20  
or  
20  
)\'  
20  
or  
20  
)

## Find a function

- UAPI Functions - [Style s::list](#) — This function lists information about a reseller account's available styles.

DAV:: is\_horde\_enabled

#### ▼ DCV

DCV:: check\_domains\_via\_dns

DCV:: check\_domains\_via\_http

DCV:: ensure\_domains\_can\_pass\_dcv

#### ▼ DomainInfo

DomainInfo:: domains\_data

DomainInfo:: list\_domains

DomainInfo:: main\_domain\_builtin\_subdomain\_aliases

DomainInfo:: single\_domain\_data

#### ▼ DNS

DNS:: ensure\_domains\_reside\_only\_locally

DNS:: has\_local\_authority

#### ▼ DNSSEC

DNSSEC:: disable\_dnssec

DNSSEC:: enable\_dnssec

DNSSEC:: fetch\_dns\_records

DNSSEC:: set\_nsec3

DNSSEC:: unset\_nsec3

#### ▼ Email

Email:: account\_name

Email:: add\_auto\_responder

Email:: add\_domain\_forwarder

Email:: add\_forwarder

Email:: add\_list

Email:: add\_mailman\_delegates

Email:: add\_mx

Email:: add\_pop

Email:: add\_spam\_filter

### ▼ LiveAPI Perl Module

```
my $cpliveapi =  
Cpanel::LiveAPI->new(  
); # Connect to  
cPanel - only do this  
once.
```

```
# Get the  
dynamicui.conf  
settings for Addon  
Domains, FTP  
Accounts, and  
Anonymous FTP.  
my $app_info =  
$cpliveapi->uapi(  
    'Branding',  
    'get_applications',  
    {  
        'app_keys' =>  
        'addon_domains,ftp_ac  
counts,anonymous_ftp'  
    }  
);
```

#### **Note:**

For more information, read our [Guide to the LiveAPI System](#).

- UAPI Functions - `Style::set_default` — This function sets a customer's default style.
- UAPI Functions - `Style::update` — This function applies a new style to the cPanel interface.
- UAPI Functions - `The::update` — This function applies a new style to the cPanel interface.

Email: browse\_mailbox  
Email: change\_mx  
Email: check\_fast\_mail  
Email: check\_pipe\_forwarder  
Email: delete\_auto\_responder  
Email: delete\_domain\_forwarder  
Email: delete\_filter  
Email: delete\_forwarder  
Email: delete\_held\_messages  
Email: delete\_list  
Email: delete\_mx  
Email: delete\_pop  
Email: disable\_filter  
Email: disable\_mailbox\_autocreate  
Email: disable\_spam\_assassin  
Email: disable\_spam\_autodelete  
Email: disable\_spam\_box  
Email: dispatch\_client\_settings  
Email: edit\_pop\_quota  
Email: enable\_filter  
Email: enable\_mailbox\_autocreate  
Email: enable\_spam\_assassin  
Email: enable\_spam\_box  
Email: fetch\_charmaps  
Email: fts\_rescan\_mailbox  
Email: generate\_mailman\_opt  
Email: get\_auto\_responder  
Email: get\_chase

## ▼ cPanel Template Toolkit

```
<!-- Get a hash of all the data, then display the file value. -->
[% data = execute(
  'Branding',
  'get_information_for_application', {
    'app_keys' =>
    'addon_domains,ftp_accounts,anonymous_ftp'
  } ); %]
[% FOREACH q = data.itemdesc %]
  <p>
    [% q %]
  </p>
[% END %]

<!-- Get only a hash of the data. -->
[%
  execute('Branding',
  'get_applications', {
    'app_keys' =>
    'addon_domains,ftp_accounts,anonymous_ftp'
  } ).data.file %]
```

**Note:**

For more information, read our [Guide to Template Toolkit documentation](#).

ts

Email: `get_client_settings`

Email: `get_default_email_quota`

Email: `get_default_email_quota_mib`

Email: `get_disk_usage`

Email: `get_filter`

Email: `get_held_message_count`

Email: `get_mailbox_autocreate`

Email: `get_mailman_delegates`

Email: `get_main_account_disk_usage`

Email: `get_main_account_disk_usage_bytes`

Email: `get_max_email_quota`

Email: `get_max_email_quota_mib`

Email: `get_pop_quota`

Email: `get_spam_settings`

Email: `get_webmail_settings`

Email: `has_delegated_mailman_lists`

Email: `has_plaintext_authentication`

Email: `hold_outgoing`

Email: `is_integer`

Email: `list_autoresponders`

Email: `list_default_address`

Email: `list_domain_forwarders`

Email: `list_filters`

Email: `list_filters_backups`

Email: `list_forwarders`

Email: `list_forward`

## Command Line

```
uapi --user=username  
Branding  
get_applications  
app_keys=addon_domains,anonymous_ftp
```

### Notes:

- You **must** URI-encode values.
- `username` represents your account-level username.
- For more information and additional output options, read our [Guide to UAPI](#) documentation or run the `uapi --help` command.
- If you run CloudLinux™, you **must** use the full path of the `uapi` command:

```
/usr/local  
/cpanel/bin/uapi
```

## Output (JSON)

```
{  
  "messages": null,  
  "errors": null,  
  "status": 1,  
  "metadata": {  
  
  },  
  "data": {  
    "addon_domains":  
    {  
      "width": "48",  
      "itemorder":  
      "1",  
      "file":  
      "addon_domains",  
      "itemdesc":  
      "Addon Domains",  
      "height": "48",  
      "feature":  
      "addondomains",  
      "group":  
      "domains",
```

ers\_backups  
Email: list\_lists  
Email: list\_mail\_domains  
Email: list\_mx  
Email: list\_pops  
Email: list\_pops\_with\_disk  
Email: list\_system\_filter\_info  
Email: passwd\_list  
Email: passwd\_pop  
Email: release\_outgoing  
Email: remove\_mailman\_delegates  
Email: reorder\_filters  
Email: set\_always\_accept  
Email: set\_default\_address  
Email: set\_list\_privacy\_options  
Email: stats\_db\_status  
Email: store\_filter  
Email: suspend\_incoming  
Email: suspend\_login  
Email: suspend\_outgoing  
Email: trace\_filter  
Email: unsuspend\_incoming  
Email: unsuspend\_login  
Email: unsuspend\_outgoing  
Email: verify\_password  
▼ EmailAuth  
EmailAuth: disable\_dkim  
EmailAuth: enable\_dkim  
EmailAuth: ensure\_dkim\_keys\_exist

```
"subtype":  
"img",  
  "imgtype":  
"icon",  
  "searchtext":  
"Domains Addon  
domain",  
  "url":  
"addon/index.html",  
  "type":  
"image",  
  "implements":  
"Domains_AddonDomains  
",  
  },  
  "ftp_accounts": {  
    "width": "48",  
    "itemorder":  
"6",  
    "file":  
"ftp_accounts",  
    "itemdesc":  
"FTP Accounts",  
    "height": "48",  
    "feature":  
"ftpaccts",  
    "group":  
"files",  
    "subtype":  
"img",  
    "imgtype":  
"icon",  
    "searchtext":  
"FTP Accounts ftp  
create",  
    "url":  
"ftp/accounts.html",  
    "touch": "ftp",  
    "type": "image"  
  },  
  "anonymous_ftp": {  
    "width": "48",  
    "itemorder":  
"8",  
    "file":  
"anonymous_ftp",  
    "itemdesc":  
"Anonymous FTP",  
    "height": "48",  
    "if":  
"$hasanonftp",  
    "feature":  
"ftpaccts",
```

EmailAuth:: fetch\_  
dkim\_private\_keys

EmailAuth:: install  
\_dkim\_private\_key  
s

EmailAuth:: install  
\_spf\_records

EmailAuth:: validat  
e\_current\_dkims

EmailAuth:: validat  
e\_current\_ptrs

EmailAuth:: validat  
e\_current\_spfs

#### ExternalAuthenticat ion

ExternalAuthentic  
ation:: add\_authn\_li  
nk

ExternalAuthentic  
ation:: configured\_  
modules

ExternalAuthentic  
ation:: get\_authn\_lin  
ks

ExternalAuthentic  
ation:: has\_external  
\_auth\_modules\_co  
nfigured

ExternalAuthentic  
ation:: remove\_auth  
n\_link

#### Features

Features:: get\_feat  
ure\_metadata

Features:: has\_fea  
ture

Features:: list\_feat  
ures

#### Fileman

Fileman:: autocom  
pletedir

Fileman:: empty\_tr  
ash

Fileman:: get\_file\_  
content

Fileman:: get\_file\_i  
nformation

Fileman:: list\_files


Fileman:: save\_file  
\_content

Fileman:: transcod  
e

Fileman:: upload\_fi  
les

```
"group":  
"files",  
  "subtype":  
"img",  
  "imgtype":  
"icon",  
  "searchtext":  
"Anonymous FTP  
anonymousftp",  
  "url":  
"ftp/anonymous.html",  
  "touch": "ftp",  
  "type": "image"
```

- Ftp:: add\_ftp
  - Ftp:: allows\_anonymous\_ftp
  - Ftp:: allows\_anonymous\_ftp\_incoming
  - Ftp:: delete\_ftp
  - Ftp:: ftp\_exists
  - Ftp:: get\_ftp\_daemon\_info
  - Ftp:: get\_port
  - Ftp:: get\_quota
  - Ftp:: get\_welcome\_message
  - Ftp:: kill\_session
  - Ftp:: list\_ftp
  - Ftp:: list\_ftp\_with\_disk
  - Ftp:: list\_sessions
  - Ftp:: passwd
  - Ftp:: server\_name
  - Ftp:: set\_anonymous\_ftp
  - Ftp:: set\_anonymous\_ftp\_incoming
  - Ftp:: set\_homedir
  - Ftp:: set\_quota
  - Ftp:: set\_welcome\_message
- Integration
  - Integration:: fetch\_url
- KnownHosts
  - KnownHosts:: create
  - KnownHosts:: delete
  - KnownHosts:: update
  - KnownHosts:: verify
- LangPHP
  - LangPHP:: php\_get\_domain\_handler
  - LangPHP:: php\_get\_impacted\_domains
  - LangPHP:: php\_get\_installed\_version

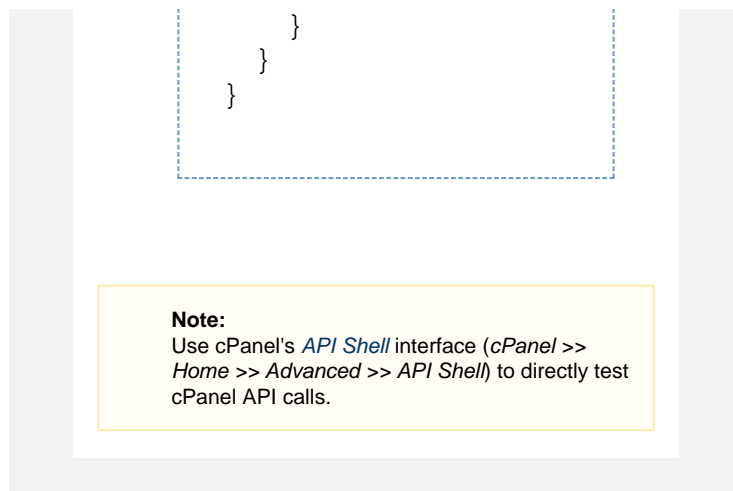

## Parameters

Parameter	Type	Description	Possible values	Example
-----------	------	-------------	-----------------	---------



s

LangPHP:: php\_get\_system\_default\_version

LangPHP:: php\_get\_vhost\_versions

LangPHP:: php\_ini\_get\_user\_basic\_directives

LangPHP:: php\_ini\_get\_user\_content

LangPHP:: php\_ini\_get\_user\_paths

LangPHP:: php\_ini\_set\_user\_basic\_directives

LangPHP:: php\_ini\_set\_user\_content

LangPHP:: php\_set\_vhost\_versions

▼ LastLogin

LastLogin:: get\_last\_or\_current\_logged\_in\_ip

▼ Locale

Locale:: get\_attributes

▼ Mailboxes

Mailboxes:: expunge\_mailbox\_messages

Mailboxes:: expunge\_messages\_for\_mailbox\_guid

Mailboxes:: get\_mailbox\_status

Mailboxes:: has\_utf8\_mailbox\_names

Mailboxes:: set\_utf8\_mailbox\_names

▼ Market

Market:: cancel\_pending\_ssl\_certificate

Market:: create\_shipping\_cart

Market:: get\_all\_products

Market:: get\_certificate\_status\_details

Market:: get\_login\_url

Market:: get\_pending\_ssl\_certificates

app_keys	string	<p>The application's feature name.</p> <p>If you do <b>not</b> specify this parameter, the output will include all of the applications that the dynamicui.conf file contains.</p>	<p>A comma-separated list of application feature names.</p> <div style="border: 1px solid orange; padding: 5px; margin-top: 10px;"> <p><b>Note</b>: This value <b>must</b> match an application's feature name value in the dynamicui.conf file. For more information, read our <a href="#">Guide to cPanel Interface Customization - Appkeys documentation</a>.</p> </div>	addon_domains, ftp_accounts, anonymous_ftp
----------	--------	---	---	--

## Returns

Return	Type	Description	Possible values	Example
--------	------	-------------	-----------------	---------

Market: [get\\_provider\\_specific\\_dcvs\\_constraints](#)

Market: [get\\_providers\\_list](#)

Market: [get\\_ssl\\_certificate\\_if\\_available](#)

Market: [process\\_ssl\\_pending\\_queue](#)

Market: [request\\_ssl\\_certificates](#)

Market: [set\\_status\\_of\\_pending\\_queue\\_items](#)

Market: [set\\_url\\_after\\_checkout](#)

Market: [validate\\_login\\_token](#)

▼ Mime

Mime: [add\\_handler](#)

Mime: [add\\_hotlink](#)

Mime: [add\\_mime](#)

Mime: [add\\_redirect](#)

Mime: [delete\\_handler](#)

Mime: [delete\\_hotlink](#)

Mime: [delete\\_mime](#)

Mime: [delete\\_redirect](#)

Mime: [list\\_handlers](#)

Mime: [list\\_hotlinks](#)

Mime: [list\\_mime](#)

Mime: [list\\_redirects](#)

Mime: [redirect\\_info](#)

▼ ModSecurity

ModSecurity: [disable\\_all\\_domains](#)

ModSecurity: [disable\\_domains](#)

ModSecurity: [enable\\_all\\_domains](#)

ModSecurity: [enable\\_domains](#)

addon_domains	hash	A hash that lists the details for a feature.  <b>Note</b> : This parameter returns a feature's app_key value.	This hash includes the width, itemorder, file, itemdesc, height, feature, group, subtype, imgtype, seachtext, url, type, implements, touch, and if returns.	
width	integer	The application's icon's width.  The function returns this value in the addondomains hash.	The application's icon's width, in pixels.	48
itemorder	integer	The application's order in the dynamicui.conf file.  The function returns this value in the addondomains hash.	A positive integer that represents the application's display order in cPanel's Home interface.  For example, the first item on the cPanel Home interface has an itemorder value of 1.	4
file	string	The application's icon's filename.  The function returns this value in the addondomains hash.	An image's filename.	addon_domains
itemdesc	string	The application's display name.  The function returns this value in the addondomains hash.	A string value.	Addon Domain
height	integer	The application's icon's height.  The function returns this value in the addondomains hash.	The application's icon's height, in pixels.	48

- ModSecurity:: has\_modsecurity\_installed
- ModSecurity:: list\_domains
- ▼ Mysql
  - Mysql:: add\_host
  - Mysql:: add\_host\_note
  - Mysql:: check\_database
  - Mysql:: create\_database
  - Mysql:: create\_user
  - Mysql:: delete\_database
  - Mysql:: delete\_host
  - Mysql:: delete\_user
  - Mysql:: get\_host\_notes
  - Mysql:: get\_privileges\_on\_database
  - Mysql:: get\_restrictions
  - Mysql:: get\_server\_information
  - Mysql:: locate\_server
  - Mysql:: rename\_database
  - Mysql:: rename\_user
  - Mysql:: repair\_database
  - Mysql:: revoke\_access\_to\_database
  - Mysql:: set\_password
  - Mysql:: set\_privileges\_on\_database
- ▼ Notifications
  - Notifications:: get\_notifications\_count
- ▼ NVData
  - NVData:: get
  - NVData:: set
- ▼ Parser
  - Parser:: firstfile\_relative\_uri

feature	string	A feature name.  The item will <b>only</b> display if the cPanel user has access to this feature.  The function returns this value in the addondomains hash.	A feature name.	addondomains
group	string	The item's group.  The function returns this value in the addondomains hash.	A string value.	advanced
subtype	string	The item's subtype.  The function returns this value in the addondomains hash.	img is the only possible value.	img
imgtype	string	The item's image type.  The function returns this value in the addondomains hash.	icon is the only possible value.	icon
searchtext	string	One or more search terms.  The item will display when users enter these search terms in the <i>Quick Find</i> textbox.  The function returns this value in the addondomains hash.	A space-separated list of search terms.	Domains Addon domain
url	string	The location to which the application's icon links.  The function returns this value in the addondomains hash.	A valid filepath or URL.	addon/index.html
type	string	The application's type.  The function returns this value in the addondomains hash.	image is the only possible value.	image
implementations	string	The app_key value that the system modified.  The function returns this value in the addondomains hash.	An application.	Domains_AddonDomains

- PassengerApps:: disable\_application
  - PassengerApps:: edit\_application
  - PassengerApps:: enable\_application
  - PassengerApps:: ensure\_deps
  - PassengerApps:: list\_applications
  - PassengerApps:: register\_application
  - PassengerApps:: unregister\_application
- PasswdStrength:: get\_required\_strength
- Personalization::set
  - Personalization::get
- Postgresql:: create\_database
  - Postgresql:: create\_user
  - Postgresql:: delete\_database
  - Postgresql:: get\_restrictions
  - Postgresql:: grant\_all\_privileges
  - Postgresql:: rename\_database
  - Postgresql:: rename\_user
  - Postgresql:: rename\_user\_no\_password
  - Postgresql:: revoke\_all\_privileges
  - Postgresql:: set\_password
- Pushbullet:: send\_test\_message
- Quota:: get\_quota\_info

touch	string	<p>Conditional arguments that determine whether to display the item, if the touch file exists.</p> <p>The function returns this value in the addondomains hash.</p>	A valid string.	ftp
if	string	<p>Conditional arguments that determine whether to display the item, if any exist.</p> <p>For example, \$isreseller indicates that the item <b>only</b> displays for reseller accounts.</p> <p>For more information, read our <a href="#">Guide to cPanel Variables</a> documentation.</p> <p>The function returns this value in the addondomains hash.</p>	A valid string.	\$isreseller

- ▼ Resellers
  - Resellers:: list\_accounts
- ▼ ResourceUsage
  - ResourceUsage:: get\_usages
- ▼ Restore
  - Restore:: directory\_listing
  - Restore:: get\_users
  - Restore:: query\_file\_info
  - Restore:: restore\_file
- ▼ Session
  - Session:: create\_temp\_user
- ▼ SiteTemplates
  - SiteTemplates:: list\_site\_templates
  - SiteTemplates:: list\_user\_settings
  - SiteTemplates:: publish
- ▼ SpamAssassin
  - SpamAssassin :: clear\_spam\_box
  - SpamAssassin:: get\_symbolic\_test\_names
  - SpamAssassin:: get\_user\_preferences
  - SpamAssassin:: update\_user\_preference
- ▼ SSH
  - SSH:: get\_port
- ▼ SSL
  - SSL:: add\_autossl\_excluded\_domains
  - SSL:: can\_ssl\_redirect
  - SSL:: check\_shared\_cert
  - SSL:: delete\_cert
  - SSL:: delete\_csr
  - SSL:: delete\_key
  - SSL:: delete\_ssl
  - SSL :: disable\_mail\_sni

SSL:: enable\_mail  
\_sni

SSL:: fetch\_best\_f  
or\_domain

SSL:: fetch\_cert\_in  
fo

SSL:: fetch\_certific  
ates\_for\_fqdns

SSL:: fetch\_key\_a  
nd\_cabundle\_for\_  
certificate

SSL:: find\_certifica  
tes\_for\_key

SSL:: find\_csrs\_for  
\_key

SSL:: generate\_ce  
rt

SSL:: generate\_cs  
r

SSL:: generate\_ke  
y

SSL:: get\_autossl\_  
excluded\_domains

SSL:: get\_autossl\_  
pending\_queue

SSL:: get\_autossl\_  
problems

SSL:: get\_cabundl  
e

SSL:: get\_cn\_nam  
e

SSL:: install\_ssl

SSL:: installed\_ho  
st

SSL:: installed\_ho  
sts

SSL:: is\_autossl\_c  
heck\_in\_progress

SSL:: is\_mail\_sni\_  
supported

SSL:: is\_sni\_supp  
orted

SSL:: list\_certs

SSL:: list\_csrs

SSL:: list\_keys

SSL:: list\_ssl\_item  
s

SSL:: mail\_sni\_sta  
tus

SSL:: rebuild\_mail  
\_sni\_config

SSL:: rebuildssldb

SSL:: remove\_aut  
ossl\_excluded\_do  
mains

SSL:: set\_autossl\_  
excluded\_domains

SSL:: set\_cert\_frie  
ndly\_name

SSL:: set\_csr\_frien  
dly\_name

SSL:: set\_key\_frie  
ndly\_name

SSL:: set\_primary  
\_ssl

SSL:: set\_ssl\_shar  
e

SSL:: show\_cert

SSL:: show\_csr

SSL:: show\_key

SSL:: start\_autossl\_  
\_check

SSL:: toggle\_ssl\_r  
edirects\_for\_doma  
ins

SSL:: upload\_cert

SSL:: upload\_key

▼ StatsBar

StatsBar:: get\_stat  
s

▼ Styles

Styles:: current

Styles:: list

Styles:: set\_default

Styles:: update

▼ SubDomain

SubDomain:: adds  
ubdomain

▼ Themes

Themes:: get\_the  
me\_base

Themes:: list

Themes:: update

▼ Tokens

Tokens:: create\_fu  
ll\_access

Tokens:: list

Tokens:: rename

Tokens:: revoke

▼ TwoFactorAuth

TwoFactorAuth:: generate\_user\_configuration

TwoFactorAuth:: get\_user\_configuration

TwoFactorAuth:: remove\_user\_configuration

TwoFactorAuth:: set\_user\_configuration

▼ UserManager

UserManager:: check\_account\_conflicts

UserManager:: create\_user

UserManager:: delete\_user

UserManager:: dismiss\_user

UserManager:: edit\_user

UserManager:: list\_users

UserManager:: lookup\_service\_account

UserManager:: lookup\_user

UserManager:: merge\_service\_account

UserManager:: unlink\_service\_account

▼ UserTasks

UserTasks:: delete

UserTasks:: retrieve

▼ VersionControl

VersionControl:: create

VersionControl:: delete

VersionControl:: retrieve

VersionControl:: update

▼ VersionControlDeployment

VersionControlDeployment:: create



VersionControlDeployment:: delete

VersionControlDeployment:: retrieve

▼ WebDisk

WebDisk:: delete\_user

WebDisk:: set\_homedir

WebDisk:: set\_password

WebDisk:: set\_permissions

▼ WebmailApps

WebmailApps:: list\_webmailapps

▼ WebVhosts

WebVhost:: list\_domains

WebVhost:: list\_ssl\_capable\_domains

▼ WordPressBackup

WordPressBackup:: any\_running

WordPressBackup:: cancel

WordPressBackup:: cleanup

WordPressBackup:: get\_available\_backups

WordPressBackup:: is\_running

WordPressBackup:: start

▼ WordPressInstance

Manager

WordPressInstanceManager:: cancel\_scan

WordPressInstanceManager:: cleanup\_scan

WordPressInstanceManager:: change\_admin\_password

WordPressInstanceManager:: configure\_autoupdate

WordPressInstanceManager:: get\_api\_version

WordPressInstanceManager:: get\_in

stance\_by\_id

WordPressInstanceManager::get\_instances

WordPressInstanceManager::get\_latest\_wordpress\_version\_from\_wordpress\_org

WordPressInstanceManager::get\_scan\_results

WordPressInstanceManager::is\_installable\_addon\_available

WordPressInstanceManager::start\_scan

▼ WordPressRestore

WordPressRestore::any\_running

WordPressRestore::cleanup

WordPressRestore::start