

# UAPI Functions - Market::process\_ssl\_pending\_queue

## Guide to UAPI

Return Data  
Filter Output  
Sort Output  
Paginate Output  
Output Columns  
Calls from the WHM API  
Custom UAPI Modules

Backup  
Backup::fullbackup  
p\_to\_ftp  
Backup::fullbackup\_to\_homedir  
Backup::fullbackup\_to\_scp\_with\_key

Backup::fullbackup\_to\_scp\_with\_password  
Backup::list\_backups

### Bandwidth

Bandwidth::get\_enabled\_protocols  
Bandwidth::get\_retention\_periods  
Bandwidth::query

### Batch

Batch::strict

### Brand

Brand::read

### Branding

Branding::file  
Branding::get\_applications  
Branding::get\_application\_information  
Branding::get\_available\_applications  
Branding::get\_info

## Description

This function manually processes the cPanel Market's SSL certificate request pending queue.

## Examples

### ▼ cPanel or Webmail Session URL

```
https://hostname.example.com:2083/cpsess#####/execute/Market/process_ssl_pending_queue
```

#### Note:

This example calls the UAPI function via a cPanel session. For more information, read our [Guide to UAPI](#) documentation.

### ▼ LiveAPI PHP Class

```
$cpanel = new CPANEL(); // Connect to cPanel - only do this once.  
  
// Process the SSL pending queue.  
$flush_twice = $cpanel->uapi('Market', 'process_ssl_pending_queue');
```

#### Note:

For more information, read our [Guide to the LiveAPI System](#).

## Function information

## About this module

The Market module manages connections to cPanel Market providers.

## About UAPI

UAPI accesses and modifies data for cPanel accounts.

information\_for\_applications

Branding:: image

Branding:: include

Branding:: spritelist

#### CacheBuster

CacheBuster:: read

CacheBuster:: update

#### Chkserverd

Chkserverd:: get\_exit\_ports

Chkserverd:: get\_exit\_ports\_ssl

#### Chrome

Chrome:: get\_dom

#### Contactus

Contactus:: is\_enabled

#### cPAddons

cPAddons:: get\_available\_addons

cPAddons:: get\_instance\_settings

cPAddons:: list\_addon\_instances

#### cPGreyList

cPGreyList:: disable\_all\_domains

cPGreyList:: disable\_domains

cPGreyList:: enable\_all\_domains

cPGreyList:: enable\_domains

cPGreyList:: has\_greylisting\_enabled

cPGreyList:: list\_domains

#### DAV

DAV:: disable\_shared\_global\_addressbook

DAV:: enable\_shared\_global\_addressbook

DAV:: get\_calendar\_contacts\_config

DAV:: has\_shared\_global\_addressbook

### LiveAPI Perl Module

```
my $cpliveapi =  
Cpanel::LiveAPI->new(  
); # Connect to  
cPanel - only do this  
once.
```

```
# Process the SSL  
pending queue.  
my $flush_twice =  
$cpliveapi->uapi(  
    'Market',  
    'process_ssl_pending_  
queue'  
);
```

#### Note:

For more information, read our [Guide to the LiveAPI System](#).

### cPanel Template Toolkit

```
<!-- Process the SSL  
pending queue. -->  
[% execute('Market',  
'process_ssl_pending_  
queue') %]
```

#### Note:

For more information, read our [Guide to Template Toolkit documentation](#).

#### Notes:

- The `Fe`
- The `int`
- The `Ur`
- The `mt`
- The `us`
- The `20`
- The `or`
- The `20`
- The `).'`
- The `20`
- The `or`
- The `20`
- The `).`

## Find a function

- UAPI Functions - SSL: delete\_ssl | — This function removes SSL from a domain.

DAV:: is\_dav\_service\_enabled

DAV:: is\_horde\_enabled

#### ▼ DCV

DCV:: check\_domains\_via\_dns

DCV:: check\_domains\_via\_http

DCV:: ensure\_domains\_can\_pass\_dcv

#### ▼ DomainInfo

DomainInfo:: domains\_data

DomainInfo:: list\_domains

DomainInfo:: main\_domain\_builtin\_subdomain\_aliases

DomainInfo:: single\_domain\_data

#### ▼ DNS

DNS:: ensure\_domains\_reside\_only\_locally

DNS:: has\_local\_authority

#### ▼ DNSSEC

DNSSEC:: disable\_dnssec

DNSSEC:: enable\_dnssec

DNSSEC:: fetch\_dns\_records

DNSSEC:: set\_nsec3

DNSSEC:: unset\_nsec3

#### ▼ Email

Email:: account\_name

Email:: add\_auto\_responder

Email:: add\_domain\_forwarder

Email:: add\_forwarder

Email:: add\_list

Email:: add\_mailman\_delegates

Email:: add\_mx

Email:: add\_pop

#### ▼ Command Line

```
uapi --user=username  
Market  
process_ssl_pending_queue
```

#### Notes:

- You **must** URI-encode values.
- `username` represents your account-level username.
- For more information and additional output options, read our [Guide to UAPI](#) documentation or run the `uapi --help` command.
- If you run CloudLinux™, you **must** use the full path of the `uapi` command:

```
/usr/local  
/cpanel/bin/uapi
```

#### ▼ Output (JSON)

```
{  
  "messages":null,  
  "errors":null,  
  "status":1,  
  "metadata":{  
    "transformed":1  
  },  
  "data": [  
    {  
      "certificate_pem":  
null,  
      "created_time":  
"1460136406",  
      "csr": "-----BEGIN  
CERTIFICATE  
REQUEST-----\nMIICqjC  
CAZICAQAWhDEaAMBgGAlUE  
AxMRY3BhbmVsc3NsdGVzd  
C5vcmcwggEiMA0G\nSIb3DQEBAQUAA4IBDwAwg  
gEKAoIBAQCqu4KLpXCgAE  
NTJFjcUyc4v5KaF8Lu\n2OldjIT/vB58IRCIUxdDSD  
29v/qHFVBaUFetr+Ssey0
```

- UAPI Functions - SSL: :fetch\_certificate\_for\_domain — This function retrieves the best-available certificate for the domain.
- UAPI Functions - SSL: :fetch\_certificate\_info — This function retrieves all of a certificate's available information.

Email: add\_spam\_filter  
Email: browse\_mailbox  
Email: change\_mx  
Email: check\_fast\_mail  
Email: check\_pipe\_forwarder  
Email: delete\_auto\_responder  
Email: delete\_domin\_forwarder  
Email: delete\_filter  
Email: delete\_forwarder  
Email: delete\_held\_messages  
Email: delete\_list  
Email: delete\_mx  
Email: delete\_pop  
Email: disable\_filter  
Email: disable\_mailbox\_autocreate  
Email: disable\_spam\_assassin  
Email: disable\_spam\_autodelete  
Email: disable\_spam\_box  
Email: dispatch\_client\_settings  
Email: edit\_pop\_quota  
Email: enable\_filter  
Email: enable\_mailbox\_autocreate  
Email: enable\_spam\_assassin  
Email: enable\_spam\_box  
Email: fetch\_charmaps  
Email: fts\_rescan\_mailbox  
Email: generate\_mailman\_otp  
Email: get\_auto\_r

```
strMcc6JYS18Vdwfe2qwv
\npB6+Ufg+h1N41Agojxg
wz7iZ1PnGuRVfNTvNmmlj
VRzGDc4SSzskpDxZhk+aa
MgP\nSkMLFg6f6pFZ+44a
lrid1SG5gxD34xWAtt8Qy
2v+6Q4XVuMNCd9KlyAoCV
9Q+wH1\nq49yoRdwvcY6G
6mq1FWtHsToz4tdYk/Nt7
odZnyKcjHWGwn1RzO2FGb
bBxVKF8s6\ns3DL5OwPRF
QQD18V7eL7NmcFo45zmdn
dBOevrLuwXJ1yWITM2bmY
gF1nAgMBAAGg\nSTBHBGjk
qhkiG9w0BCQ4xOjA4MDYG
A1UdEQEB/wQsMCqCEWNwY
W51bHNzbHRlc3Qu\nb3Jn
ghV3d3cuY3BhbmVsc3Nsd
GVzdC5vcmcwDQYJKoZIhvc
NAQFELBQADggEBFAFAJ\ns
qTvd3d8PN26UiT4uX0Wjo
faX8u1/11hU5Saekai0Dx
l/ijq2R7TpebXe9r0t6Cr
\ns7NXXszVoKzQHV4nSFb
fb3ZxEsnVDXbPUv3D+oLf
GpMASLG+P2yOjmdHzZBNJ
go4\nQu6nf6ggJxJ0PRM8
1xL234FAKqsOvvTwTLXtY
VrwbUCzFB+yKJXvfeGETR
/3HGxR\nqoJ97Zmjsbw78
fETEsZ6rsBHPuxtsum73
BC7qoLjCl4psPznHshXvW
TeV9fyR3c\nqgdpLvwbXh
I8ZOWoNGgJlUpY9jUFggG
+YI/Mkmzmxk9QC9edIHSS
cTXxroYkmwMC\nnginnKRL
DafSp+7FyIzs=\n-----E
ND CERTIFICATE
REQUEST-----",
"deleted": 0,
"domains": [
"example.com"
],
"first_poll_time":
1458061262,
"installed": 0,
"last_poll_time":
1458061299,
"order_id": 19461,
"order_item_id":
"f9d7",
"product_id": "fg2",
"provider":
```

- UAPI Functions - SSL: :fetch\_key\_and\_certificate — This function extracts the private key and CA bundle information from a certificate.

esponder  
Email: get\_charts  
Email: get\_client\_settings  
Email: get\_default\_email\_quota  
Email: get\_default\_email\_quota\_mib  
Email: get\_disk\_usage  
Email: get\_filter  
Email: get\_held\_message\_count  
Email: get\_mailbox\_autocreate  
Email: get\_mailman\_delegates  
Email: get\_main\_account\_disk\_usage  
Email: get\_main\_account\_disk\_usage\_bytes  
Email: get\_max\_email\_quota  
Email: get\_max\_email\_quota\_mib  
Email: get\_pop\_quota  
Email: get\_spam\_settings  
Email: get\_webmail\_settings  
Email: has\_delegated\_mailman\_lists  
Email: has\_plaintext\_authentication  
Email: hold\_outgoing  
Email: is\_integer  
Email: list\_auto\_responders  
Email: list\_default\_address  
Email: list\_domain\_forwarders  
Email: list\_filters  
Email: list\_filters\_backups  
Email: list\_forward

```
"cPStore",  
"status":  
"confirmed",  
"vhost_names": [  
"example.com"  
],  
  
"last_status_code":  
"CertificateNotFound"  
,  
    "expired": 0
```

ers

Email:: list\_forwarders\_backups

Email:: list\_lists

Email:: list\_mail\_domains

Email:: list\_mx

Email:: list\_pops

Email:: list\_pops\_with\_disk

Email:: list\_system\_filter\_info

Email:: passwd\_list

Email:: passwd\_pop

Email:: release\_outgoing

Email:: remove\_mailman\_delegates

Email:: reorder\_filters

Email:: set\_always\_accept

Email:: set\_default\_address

Email:: set\_list\_privacy\_options

Email:: stats\_db\_status

Email:: store\_filter

Email:: suspend\_incoming

Email:: suspend\_login

Email:: suspend\_outgoing

Email:: trace\_filter

Email:: unsuspend\_incoming

Email:: unsuspend\_login


Email:: unsuspend\_outgoing

Email:: verify\_password

▼ EmailAuth

EmailAuth:: disable\_dkim

EmailAuth:: enable\_dkim

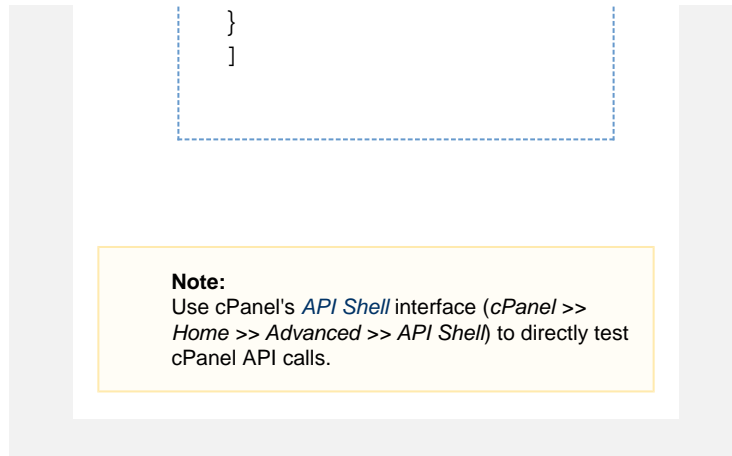

## Parameters

This function does not accept parameters.

## Returns

Return	Type	Description	Possible values	Example
	<i>array of hashes</i>	Information about each certificate request in the pending queue.	This hash includes the certificate_pem, created_time, csr, deleted, first_poll_time, installed, last_poll_time, order_id, order_item_id, product_id, provider, status, last_status_code, and expired returns, and the domains and vhost_names arrays.	
certificate_pem	<i>string</i>	The text of the certificate, if available.  The function returns this value in the unnamed hash.	<ul style="list-style-type: none"> <li>• null — The certificate is not available.</li> <li>• A certificate file in Base64 PEM format.</li> </ul>	null
created_time	<i>integer</i>	When the system placed the order.  The function returns this value in the unnamed hash.	A date in Unix time format.	1460136406
csr	<i>string</i>	The Certificate Signing Request's (CSR's) text.  The function returns this value in the unnamed hash.	A CSR file in Base64 PEM format.	▼ <a href="#">Click to view...</a> <pre>-----BEGIN CERTIFICAT E REQUEST--- --\nMIICqj CCAZICAQAw HDEaMBgGAl UEAxMRY3Bh bmVsc3NsdG VzdC5vcmcw ggEiMA0G\n CSqGSIb3DQ EBAQUAA4IB</pre>

EmailAuth:: ensure  
\_dkim\_keys\_exist

EmailAuth:: fetch\_  
dkim\_private\_keys

EmailAuth:: install  
\_dkim\_private\_key  
s

EmailAuth:: install  
\_spf\_records

EmailAuth:: validat  
e\_current\_dkims

EmailAuth:: validat  
e\_current\_ptrs

EmailAuth:: validat  
e\_current\_spfs

ExternalAuthenticat  
ion

ExternalAuthenticat  
ion:: add\_authn\_li  
nk

ExternalAuthenticat  
ion:: configured\_  
modules

ExternalAuthenticat  
ion:: get\_authn\_lin  
ks

ExternalAuthenticat  
ion:: has\_external\_  
\_auth\_modules\_co  
nfigured

ExternalAuthenticat  
ion:: remove\_auth  
n\_link

Features

Features:: get\_feat  
ure\_metadata

Features:: has\_fea  
ture

Features:: list\_feat  
ures

Fileman

Fileman:: autocom  
pletedir

Fileman:: empty\_tr  
ash

Fileman:: get\_file\_  
content

Fileman:: get\_file\_i  
nformation

Fileman:: list\_files

Fileman:: save\_file  
\_content

Fileman:: transcod  
e

DwAwggEKAo  
IBAQCqu4KL  
PxCgAENTJF  
jcUyc4v5Ka  
F8Lu\n201d  
jIT/vB58IR  
CIUxdDSD29  
v/qHFVBaUF  
Etr+Ssey0s  
trMcc6JYS1  
8Vdwfe2qvw  
\npB6+Ufg+  
hlN4lAgojx  
gwz7iZlPnG  
uRVfNTvNMm  
ljVRzGdc4S  
SzskpDxZhk  
+aaMgP\nSk  
MLFg6f6pFZ  
+44alridLS  
G5gxD34xWA  
tt8Qy2v+6Q  
4XVuMNCd9K  
lyAoCV9Q+w  
Hl\nq49yoR  
dwvcY6G6mq  
lFWtHsToz4  
tdYk/Nt7od  
ZnyKc jHWGW  
nlRzO2FGbb  
BxVKF8s6\ns3DL5OwPRF  
QQD18V7eL7  
NmcoFo45zmd  
ndBOevrLuw  
XJlyWITM2b  
mYgFlnAgMB  
AGG\nSTBH  
BgkqhkIG9w  
0BCQ4xOjA4  
MDYGA1UdEQ  
EB/wQsMCqC  
EWNwYw5lbH  
NzbHRlc3Qu  
\nb3JnghV3  
d3cuY3Bhbm  
Vsc3NsdGVz  
dC5vcmcwDQ  
YJKoZlIhvcN  
AQELBQADgg  
EBFAFAJ\nsQ  
Tvd3d8PN26  
UiT4uX0Wjo  
faX8u1/1lh  
U5SaekaiOD  
xl/ijq2R7T  
pebXe9r0t6  
Cr\ns7NXKs  
zVoKzQHV4n  
SFfb3ZxEs  
nVDXbPUv3D  
+oLfGpMASL  
G+P2yOjmdh  
zZBNJgo4\nQu6nf6ggJx  
J0PRM81xL2  
34FAKqsOvv  
TwTLXtYVrv  
bUCzfB+yKJ  
XvfeGETR/3  
HGxR\nnqOJ9  
7Zmjsbw78f  
ETEsZ6rsBH  
DPuhtxum73  
BC7qoLjC14  
psPznHshXv  
WTeV9fyR3c  
\nqpdpLvWB  
xhI8ZOWoNG  
gJlUpY9jUF  
gqG+YI/Mkm  
zmxk9QC9ed  
IHSScTXxro  
YkmwMC\nngi  
nnKRLDaFSp  
+7FyIzs=\n  
-----END  
CERTIFICAT

Fileman:: upload\_files

▼ Ftp

Ftp:: add\_ftp

Ftp:: allows\_anonymous\_ftp

Ftp:: allows\_anonymous\_ftp\_incoming

Ftp:: delete\_ftp

Ftp:: ftp\_exists

Ftp:: get\_ftp\_daemon\_info

Ftp:: get\_port

Ftp:: get\_quota

Ftp:: get\_welcome\_message

Ftp:: kill\_session

Ftp:: list\_ftp

Ftp:: list\_ftp\_with\_disk

Ftp:: list\_sessions

Ftp:: passwd

Ftp:: server\_name

Ftp:: set\_anonymous\_ftp

Ftp:: set\_anonymous\_ftp\_incoming

Ftp:: set\_homedir

Ftp:: set\_quota

Ftp:: set\_welcome\_message

▼ Integration

Integration:: fetch\_url

▼ KnownHosts

KnownHosts:: create

KnownHosts:: delete

KnownHosts:: update

KnownHosts:: verify

▼ LangPHP

LangPHP:: php\_get\_domain\_handler

LangPHP:: php\_get\_impacted\_domains

				E REQUEST---
deleted	Boolean	Whether the system has deleted the item from the pending queue.  The functions returns this value in the unnamed hash.	<ul style="list-style-type: none"> <li>0 — Deleted.</li> <li>1 — <b>Not</b> deleted.</li> </ul>	0
domains	array	An array of domains that the certificate request covers.  The function returns this array in the unnamed hash.	An array of valid domain names.	example.com
first_poll_time	string	The first time that the system polled the provider for the certificate.  The function returns this value in the unnamed hash.	A date in Unix time format.	1458061262
installed	Boolean	Whether the system installed the certificate.  The function returns this value in the unnamed hash.	<ul style="list-style-type: none"> <li>1 — Installed.</li> <li>0 — <b>Not</b> installed.</li> </ul>	0
last_poll_time	string	The last time that the system polled the provider for the certificate.  The function returns this value in the unnamed hash.	A date in Unix time format.	1458061299
order_id	string	A unique identifier for the order.  The function returns this value in the unnamed hash.	A valid string.	19461
order_item_id	string	A unique identifier of each item in the order.  The function returns this value in the unnamed hash.	A valid string.	f9d7
product_id	string	An identifier for a given product.  The function returns this value in the unnamed hash.	A valid string.	f92
provider	string	The cPanel Market provider's name.  The function returns this value in the unnamed hash.	A valid string.	cPStore



LangPHP:: php\_get\_installed\_versions

LangPHP:: php\_get\_system\_default\_version

LangPHP:: php\_get\_vhost\_versions

LangPHP:: php\_ini\_get\_user\_basic\_directives

LangPHP:: php\_ini\_get\_user\_content

LangPHP:: php\_ini\_get\_user\_paths

LangPHP:: php\_ini\_set\_user\_basic\_directives

LangPHP:: php\_ini\_set\_user\_content

LangPHP:: php\_set\_vhost\_versions

▼ LastLogin

LastLogin:: get\_last\_or\_current\_logged\_in\_ip

▼ Locale

Locale:: get\_attributes

▼ Mailboxes

Mailboxes:: expunge\_mailbox\_messages

Mailboxes:: expunge\_messages\_for\_mailbox\_guid

Mailboxes:: get\_mailbox\_status

Mailboxes:: has\_utf8\_mailbox\_names

Mailboxes:: set\_utf8\_mailbox\_names

▼ Market

Market:: cancel\_pending\_ssl\_certificate

Market:: create\_shopping\_cart

Market:: get\_all\_products

Market:: get\_certificate\_status\_details

Market:: get\_login\_url

status	string	The status of the order.  The function returns this value in the unnamed hash.	<ul style="list-style-type: none"> <li>confirmed — Payment confirmed.</li> <li>unconfirmed — Payment <b>not</b> confirmed.</li> </ul>	confirmed
vhost_names	array	An array of virtual host names.  The function returns this array in the unnamed hash.	An array of valid virtual host names.	example.com
last_status_code	string	The last status code of the order.  The function returns the value in the unnamed hash.	<ul style="list-style-type: none"> <li>CertificateNotFound — The system cannot locate the specified certificate.</li> <li>RequiresApproval — The specified certificate requires approval.</li> <li>OrderCanceled — The system canceled the order of the specified certificate.</li> <li>OrderItemCanceled — The system canceled the order item of the specified certificate.</li> </ul>	CertificateNotFound
expired	Boolean	Whether the system has deleted the item from the pending queue.  The function returns the value in the unnamed hash.	<ul style="list-style-type: none"> <li>1 — Deleted.</li> <li>0 — <b>Not</b> deleted.</li> </ul>	0

Market:: get\_pending\_ssl\_certificates

Market:: get\_provider\_specific\_dcv\_constraints

Market:: get\_providers\_list

Market:: get\_ssl\_certificate\_if\_available

Market:: process\_ssl\_pending\_queue

Market:: request\_ssl\_certificates

Market:: set\_status\_of\_pending\_queue\_items

Market:: set\_url\_after\_checkout

Market:: validate\_login\_token

#### ▼ Mime

Mime:: add\_handler

Mime:: add\_hotlink

Mime:: add\_mime

Mime:: add\_redirect

Mime:: delete\_handler

Mime:: delete\_hotlink

Mime:: delete\_mime

Mime:: delete\_redirect

Mime:: list\_handlers

Mime:: list\_hotlinks

Mime:: list\_mime

Mime:: list\_redirects

Mime:: redirect\_info

#### ▼ ModSecurity

ModSecurity:: disable\_all\_domains

ModSecurity:: disable\_domains

ModSecurity:: enable\_all\_domains

ModSecurity:: enable\_domains

ModSecurity:: has\_modsecurity\_installed

ModSecurity:: list\_domains

▼ Mysql

Mysql:: add\_host

Mysql:: add\_host\_note

Mysql :: check\_database

Mysql:: create\_database

Mysql:: create\_user

Mysql:: delete\_database

Mysql:: delete\_host

Mysql:: delete\_user

Mysql:: get\_host\_notes

Mysql:: get\_privileges\_on\_database

Mysql:: get\_restrictions

Mysql:: get\_server\_information

Mysql:: locate\_server

Mysql:: rename\_database

Mysql:: rename\_user

Mysql:: repair\_database

Mysql:: revoke\_access\_to\_database

Mysql:: set\_password

Mysql:: set\_privileges\_on\_database

▼ Notifications

Notifications:: get\_notifications\_count

▼ NVData

NVData:: get

NVData:: set

▼ Parser

Parser:: firstfile\_relati  
ative\_uri

▼ PassengerApps

PassengerApps:: d  
isable\_application

PassengerApps:: e  
dit\_application

PassengerApps:: e  
nable\_application

PassengerApps:: e  
nsure\_deps

PassengerApps:: li  
st\_applications

PassengerApps:: r  
egister\_application

PassengerApps:: u  
nregister\_applicati  
on

▼ PasswdStrength

PasswdStrength::  
get\_required\_stren  
gth

▼ Personalization

Personalization::se  
t

Personalization ::g  
et

▼ Postgresql

Postgresql:: create  
\_database

Postgresql:: create  
\_user

Postgresql:: delete  
\_database

Postgresql:: get\_re  
strictions

Postgresql:: grant\_  
all\_privileges

Postgresql:: renam  
e\_database

Postgresql:: renam  
e\_user

Postgresql:: renam  
e\_user\_no\_passw  
ord

Postgresql:: revok  
e\_all\_privileges

Postgresql:: set\_p  
assword

▼ Pushbullet

Pushbullet:: send\_  
test\_message

- ▼ Quota
  - Quota:: get\_quota\_info
- ▼ Resellers
  - Resellers:: list\_accounts
- ▼ ResourceUsage
  - ResourceUsage:: get\_usages
- ▼ Restore
  - Restore:: directory\_listing
  - Restore:: get\_users
  - Restore:: query\_file\_info
  - Restore:: restore\_file
- ▼ Session
  - Session:: create\_temp\_user
- ▼ SiteTemplates
  - SiteTemplates:: list\_site\_templates
  - SiteTemplates:: list\_user\_settings
  - SiteTemplates:: publish
- ▼ SpamAssassin
  - SpamAssassin :: clear\_spam\_box
  - SpamAssassin:: get\_symbolic\_test\_names
  - SpamAssassin:: get\_user\_preferences
  - SpamAssassin:: update\_user\_preference
- ▼ SSH
  - SSH:: get\_port
- ▼ SSL
  - SSL:: add\_autossl\_excluded\_domains
  - SSL:: can\_ssl\_redirect
  - SSL:: check\_shared\_cert
  - SSL:: delete\_cert
  - SSL:: delete\_csr
  - SSL:: delete\_key

SSL:: delete\_ssl

SSL:: disable\_mail\_sni

SSL:: enable\_mail\_sni

SSL:: fetch\_best\_for\_domain

SSL:: fetch\_cert\_info

SSL:: fetch\_certificates\_for\_fqdns

SSL:: fetch\_key\_and\_cabundle\_for\_certificate

SSL:: find\_certificates\_for\_key

SSL:: find\_csrs\_for\_key

SSL:: generate\_certificate

SSL:: generate\_csr

SSL:: generate\_key

SSL:: get\_autossl\_excluded\_domains

SSL:: get\_autossl\_pending\_queue

SSL:: get\_autossl\_problems

SSL:: get\_cabundle

SSL:: get\_cn\_name

SSL:: install\_ssl

SSL:: installed\_host

SSL:: installed\_hosts

SSL:: is\_autossl\_check\_in\_progress

SSL:: is\_mail\_sni\_supported

SSL:: is\_sni\_supported

SSL:: list\_certs

SSL:: list\_csrs

SSL:: list\_keys

SSL:: list\_ssl\_items

SSL:: mail\_sni\_status

tus

SSL:: rebuild\_mail  
\_snl\_config

SSL:: rebuildssldb

SSL:: remove\_aut  
ossl\_excluded\_do  
mains

SSL:: set\_autossl\_  
excluded\_domains

SSL:: set\_cert\_frie  
ndly\_name

SSL:: set\_csr\_frien  
dly\_name

SSL:: set\_key\_frie  
ndly\_name

SSL:: set\_primary  
\_ssl

SSL:: set\_ssl\_shar  
e

SSL:: show\_cert

SSL:: show\_csr

SSL:: show\_key

SSL:: start\_autossl\_  
\_check

SSL:: toggle\_ssl\_r  
edirects\_for\_doma  
ins

SSL:: upload\_cert

SSL:: upload\_key

▼ StatsBar

StatsBar:: get\_stat  
s

▼ Styles

Styles:: current

Styles:: list

Styles:: set\_default

Styles:: update

▼ SubDomain

SubDomain:: adds  
ubdomain

▼ Themes

Themes:: get\_the  
me\_base

Themes:: list

Themes:: update

▼ Tokens

Tokens:: create\_fu  
ll\_access

Tokens:: list

Tokens:: rename

Tokens:: revoke

▼ TwoFactorAuth

TwoFactorAuth:: generate\_user\_configuration

TwoFactorAuth:: get\_user\_configuration

TwoFactorAuth:: remove\_user\_configuration

TwoFactorAuth:: set\_user\_configuration

▼ UserManager

UserManager:: check\_account\_conflicts

UserManager:: create\_user

UserManager:: delete\_user

UserManager:: dismiss\_user

UserManager:: edit\_user

UserManager:: list\_users

UserManager:: lookup\_service\_account

UserManager:: lookup\_user

UserManager:: merge\_service\_account

UserManager:: unlink\_service\_account

▼ UserTasks

UserTasks:: delete

UserTasks:: retrieve

▼ VersionControl

VersionControl:: create

VersionControl:: delete

VersionControl:: retrieve

VersionControl:: update

▼ VersionControlDepl



## oyment

VersionControlDep  
loyment:: **create**

VersionControlDep  
loyment:: **delete**

VersionControlDep  
loyment:: **retrieve**

### ▼ WebDisk

WebDisk:: **delete\_**  
**user**

WebDisk:: **set\_ho**  
**medir**

WebDisk:: **set\_pas**  
**sword**

WebDisk:: **set\_per**  
**missions**

### ▼ WebmailApps

WebmailApps:: **list**  
**webmailapps**

### ▼ WebVhosts

WebVhost:: **list\_do**  
**mains**

WebVhost:: **list\_ssl**  
**\_capable\_domains**

### ▼ WordPressBackup

WordPressBackup  
:: **any\_running**

WordPressBackup  
:: **cancel**

WordPressBackup  
:: **cleanup**

WordPressBackup  
:: **get\_available\_ba**  
**ckups**

WordPressBackup  
:: **is\_running**

WordPressBackup  
:: **start**

### ▼ WordPressInstance

#### Manager

WordPressInstanc  
eManager:: **cancel**  
**\_scan**

WordPressInstanc  
eManager:: **cleanu**  
**p\_scan**

WordPressInstanc  
eManager:: **chang**  
**e\_admin\_passwor**  
**d**

WordPressInstanc  
eManager:: **config**  
**ure\_autoupdate**

WordPressInstanc  
eManager:: **get\_ap**

i\_version

WordPressInstanceManager:: **get\_instance\_by\_id**

WordPressInstanceManager:: **get\_instances**

WordPressInstanceManager:: **get\_latest\_wordpress\_version\_from\_wordpress\_org**

WordPressInstanceManager:: **get\_scan\_results**

WordPressInstanceManager:: **is\_installable\_addon\_available**

WordPressInstanceManager:: **start\_scan**

▼ WordPressRestore

WordPressRestore:: **any\_running**

WordPressRestore:: **cleanup**

WordPressRestore:: **start**