

# UAPI Functions - SSL::show\_csr

## Guide to UAPI

Return Data  
Filter Output  
Sort Output  
Paginate Output  
Output Columns  
Calls from the WHM API  
Custom UAPI Modules

Backup  
Backup::fullbackup\_to\_ftp  
Backup::fullbackup\_to\_homedir  
Backup::fullbackup\_to\_scp\_with\_key

Backup::fullbackup\_to\_scp\_with\_password

Backup::list\_backups

### Bandwidth

Bandwidth::get\_enabled\_protocols

Bandwidth::get\_retention\_periods

Bandwidth::query

### Batch

Batch::strict

### Brand

Brand::read

### Branding

Branding::file

Branding::get\_applications

Branding::get\_application\_information

Branding::get\_available\_applications

Branding::get\_information\_for\_applications

## Description

This function retrieves a certificate signing request (CSR).

## Examples

### ▼ cPanel or Webmail Session URL

```
https://hostname.example.com:2083/cpsess#####/execute/SSL/show_csr?friendly_name=TestCSR
```

#### Note:

This example calls the UAPI function via a cPanel session. For more information, read our Guide to UAPI documentation.

### ▼ LiveAPI PHP Class

```
$cpanel = new CPANEL(); // Connect to cPanel - only do this once.  
  
// Retrieve the CSR called TestCSR  
$SSL_show_csr = $cpanel->uapi('SSL', 'show_csr', array('friendly_name' => 'TestCSR', ));
```

#### Note:

For more information, read our Guide to the LiveAPI System.

## Function information

## About this module

The SSL module manages certificates, certificate requests, and keys on your server.

## About UAPI

UAPI accesses and modifies data for cPanel accounts.

Branding:: image  
Branding:: include  
Branding:: spritelist

#### CacheBuster

CacheBuster:: read  
CacheBuster:: update

#### Chkserverd

Chkserverd:: get\_exit\_ports  
Chkserverd:: get\_exit\_ports\_ssl

#### Chrome

Chrome:: get\_domain

#### Contactus

Contactus:: is\_enabled

#### cPAddons

cPAddons:: get\_available\_addons  
cPAddons:: get\_instance\_settings  
cPAddons:: list\_addon\_instances

#### cPGreyList

cPGreyList:: disable\_all\_domains  
cPGreyList:: disable\_domains  
cPGreyList:: enable\_all\_domains  
cPGreyList:: enable\_domains  
cPGreyList:: has\_greylisting\_enabled  
cPGreyList:: list\_domains

#### DAV

DAV:: disable\_shared\_global\_addressbook  
DAV:: enable\_shared\_global\_addressbook  
DAV:: get\_calendar\_contacts\_config  
DAV:: has\_shared\_global\_addressbook  
DAV:: is\_dav\_service\_enabled

### LiveAPI Perl Module

```
my $cpliveapi =  
Cpanel::LiveAPI->new(  
); # Connect to  
cPanel - only do this  
once.  
  
# Retrieve the CSR  
called TestCSR  
my $$SSL_show_csr =  
$cpliveapi->uapi(  
    'SSL',  
    'show_csr',  
    {  
        'friendly_name'  
=> 'TestCSR',  
    }  
);
```

#### Note:

For more information, read our [Guide to the LiveAPI System](#).

### cPanel Template Toolkit

```
<!-- Retrieve the  
CSR called TestCSR  
-->  
[% data = execute(  
    'SSL', 'show_csr', {  
        friendly_name =>  
        'TestCSR' } ); %]  
[% FOREACH q = data  
    %]  
    <p>  
        [% q %]  
    </p>  
[% END %]
```

#### Note:

For more information, read our [Guide to Template Toolkit documentation](#).

#### Notes:

- The
- Ur
- int
- us
- 20
- or
- 20
- or
- 20
- or
- 20
- ).

Find  
a  
function

- UAPI  
Func  
tions  
-  
SSL:  
:dele  
te\_ss  
l —  
This  
functi  
on  
remo  
ves  
SSL  
from  
a  
dom  
ain.

- DAV:: is\_horde\_enabled
- DCV
    - DCV:: check\_domains\_via\_dns
    - DCV:: check\_domains\_via\_http
    - DCV:: ensure\_domains\_can\_pass\_dcv
  - DomainInfo
  - DomainInfo:: domains\_data
  - DomainInfo:: list\_domains
  - DomainInfo:: main\_domain\_builtin\_subdomain\_aliases
  - DomainInfo:: single\_domain\_data
- DNS
  - DNS:: ensure\_domains\_reside\_only\_locally
  - DNS:: has\_local\_authority
- DNSSEC
  - DNSSEC:: disable\_dnssec
  - DNSSEC:: enable\_dnssec
  - DNSSEC:: fetch\_dns\_records
  - DNSSEC:: set\_nsec3
  - DNSSEC:: unset\_nsec3
- Email
  - Email:: account\_name
  - Email:: add\_auto\_responder
  - Email:: add\_domain\_forwarder
  - Email:: add\_forwarder
  - Email:: add\_list
  - Email:: add\_mailman\_delegates
  - Email:: add\_mx
  - Email:: add\_pop
  - Email:: add\_spam\_filter

## Command Line

```
uapi --user=username
SSL show_csr
friendly_name=TestCSR
```

### Notes:

- You **must** URI-encode values.
- username represents your account-level username.
- For more information and additional output options, read our [Guide to UAPI](#) documentation or run the `uapi --help` command.
- If you run CloudLinux™, you **must** use the full path of the `uapi` command:

```
/usr/local
/cpanel/bin/uapi
```

## Output (JSON)

```
{
  "messages": null,
  "errors": null,
  "status": 1,
  "data": {
    "text":
      "Certificate
      Request:\n Data:\n
      Version: 0 (0x0)\n
      Subject: CN =
      example.com, C = US,
      emailAddress =
      username@example.com,
      O = Example,
      ST = Texas, L =
      Houston\n
      Subject Public
      Key Info:\n Public
      Key Algorithm:
      rsaEncryption\n
      Public-Key: (2048
      bit)\n
      Modulus:\n
      00:bf:44:22:cb:13:2b:
      7f:41:9f:48:85:d6:2c:
```

- UAPI Functions - SSL: fetch\_certificate\_for\_domain — This function retrieves the best-available certificate for the domain.
- UAPI Functions - SSL: fetch\_certificate\_info — This function retrieves all of a certificate's available information.

Email: browse\_mailbox  
Email: change\_mx  
Email: check\_fastmail  
Email: check\_pipe\_forwarder  
Email: delete\_auto\_responder  
Email: delete\_dominant\_forwarder  
Email: delete\_filter  
Email: delete\_forwarder  
Email: delete\_held\_messages  
Email: delete\_list  
Email: delete\_mx  
Email: delete\_pop  
Email: disable\_filter  
Email: disable\_mailbox\_autocreate  
Email: disable\_spam\_assassin  
Email: disable\_spam\_autodelete  
Email: disable\_spam\_box  
Email: dispatch\_client\_settings  
Email: edit\_pop\_quota  
Email: enable\_filter  
Email: enable\_mailbox\_autocreate  
Email: enable\_spam\_assassin  
Email: enable\_spam\_box  
Email: fetch\_charmaps  
Email: fts\_rescan\_mailbox  
Email: generate\_mailman\_opt  
Email: get\_auto\_responder  
Email: get\_chase

77:\n  
03:cf:84:db:90:5c:5a:ed:e5:9c:cb:d6:9d:4b:fc:\n  
67:58:b7:db:71:dd:eb:8e:5a:77:6f:03:5d:96:85:\n  
60:dc:91:45:59:85:ff:9e:57:76:a5:b5:cd:dc:48:\n  
25:89:3f:8f:17:c1:c2:1e:4d:ec:f0:08:1a:a9:cc:\n  
2d:45:34:be:82:77:a5:e4:bb:0b:82:bc:82:51:c3:\n  
ac:1b:ed:c3:a4:b3:e6:14:4f:ba:9e:39:af:08:ae:\n  
3c:2c:15:bd:dc:03:17:93:01:95:4f:c0:2a:0f:3b:\n  
46:5f:5e:6f:96:d5:b2:dd:53:22:a9:91:e4:36:8e:\n  
f2:60:5b:ca:b3:72:e6:be:53:8b:9e:b6:72:26:04:\n  
85:37:f4:89:c1:78:91:7d:46:96:71:c4:be:39:f3:\n  
cc:1d:79:bc:33:61:5c:5f:76:52:4a:7d:d0:60:31:\n  
79:96:44:6e:6a:77:72:70:1f:3f:08:24:e6:d1:50:\n  
c0:6a:86:98:df:56:8b:ae:2f:c1:97:bc:ed:4c:70:\n  
a1:a6:b2:7e:25:97:8f:95:73:a1:84:71:43:da:33:\n  
48:d5:44:17:e1:28:1e:37:93:63:fa:ec:45:17:39:\n

- UAPI Functions - SSL:fetch\_key\_and\_certificate — This function extracts the private key and CA bundle information from a certificate.

ts

Email: get\_client\_settings

Email: get\_default\_email\_quota

Email: get\_default\_email\_quota\_mib

Email: get\_disk\_usage

Email: get\_filter

Email: get\_held\_message\_count

Email: get\_mailbox\_autocreate

Email: get\_mailman\_delegates

Email: get\_main\_account\_disk\_usage

Email: get\_main\_account\_disk\_usage\_bytes

Email: get\_max\_email\_quota

Email: get\_max\_email\_quota\_mib

Email: get\_pop\_quota

Email: get\_spam\_settings

Email: get\_webmail\_settings

Email: has\_delegated\_mailman\_lists

Email: has\_plaint\_authentication

Email: hold\_outgoing

Email: is\_integer

Email: list\_autoresponders

Email: list\_default\_address

Email: list\_domain\_forwarders

Email: list\_filters

Email: list\_filters\_backups

Email: list\_forwarders

Email: list\_forward

e5:ff:62:90:6b:b2:eb:  
11:5b:32:b2:ce:51:0b:  
8a:\n 3e:95\n

Exponent: 65537  
(0x10001)\n

Attributes:\n

a0:00\n Signature

Algorithm:

sha1WithRSAEncryption  
\n

41:bd:99:89:7a:1b:c2:  
71:90:f7:5a:17:05:c9:  
77:c8:f0:0e:\n

62:0f:85:0d:fb:16:02:  
74:34:5f:7a:93:3e:50:

8e:cf:f4:6f:\n

ee:ab:7b:c9:ef:7c:76:  
59:dd:85:fd:7d:4e:ac:

95:9d:b7:ae:\n

8a:89:fc:1f:5b:ee:ee:  
6b:cd:9b:4e:2d:2a:fb:

1b:32:8f:8f:\n

56:70:d1:42:c1:72:ed:  
04:4b:27:5a:ee:5a:e1:

2b:6e:53:59:\n

aa:14:25:87:7f:2b:c3:  
7a:f5:b2:6c:71:2a:93:

62:40:ca:87:\n

b4:fe:34:a1:95:77:1e:  
98:f1:71:5e:14:97:61:

73:07:8d:bc:\n

3e:e1:f8:47:f7:00:8b:  
06:a5:1c:84:a3:88:9a:

7b:37:74:5d:\n

34:a6:ae:22:ab:a3:b8:  
9f:d7:ab:60:9a:70:81:

15:13:0f:d9:\n

ff:ab:7a:2b:fd:cb:96:  
04:ad:00:6b:e4:74:4e:

59:57:a5:9e:\n

84:c7:74:d8:62:08:37:  
b3:ee:cc:74:b2:b6:26:

e8:c0:37:32:\n

19:dc:1c:ff:97:4a:cc:  
1c:36:c3:a7:2d:ca:77:

53:c4:1d:1c:\n

ers\_backups  
Email: list\_lists  
Email: list\_mail\_omains  
Email: list\_mx  
Email: list\_pops  
Email: list\_pops\_with\_disk  
Email: list\_system\_filter\_info  
Email: passwd\_list  
Email: passwd\_pop  
Email: release\_outgoing  
Email: remove\_mailman\_delegates  
Email: reorder\_filters  
Email: set\_always\_accept  
Email: set\_default\_address  
Email: set\_list\_privacy\_options  
Email: stats\_db\_status  
Email: store\_filter  
Email: suspend\_incoming  
Email: suspend\_login  
Email: suspend\_outgoing  
Email: trace\_filter  
Email: unsuspend\_incoming  
Email: unsuspend\_login  
Email: unsuspend\_outgoing  
Email: verify\_password  
▼ EmailAuth  
EmailAuth: disable\_dkim  
EmailAuth: enable\_dkim  
EmailAuth: ensure\_dkim\_keys\_exist

```
3c:36:5b:f8:90:46:01:
48:49:61:9b:ef:bb:b3:
a8:94:0b:3f:\n

50:51:93:29:9f:aa:9a:
ab:ae:3d:3c:72:8a:0b:
bc:2f:3f:19:\n
d7:5d:70:14\n",
    "csr":
"-----BEGIN
CERTIFICATE
REQUEST-----THE
CERTIFICATE
TEXT\n-----END
CERTIFICATE
REQUEST-----",
    "details": {

"organizationalUnitName": null,
    "emailAddress":
"username@example.com
",

"organizationName":
"Example",
    "countryName":
"US",

"stateOrProvinceName"
: "Texas",

"modulus":
"a74f7636fa6ac93ee683
6a83a995b55deb5019ea3
6d7ba3dafb00e38d693ac
db0c81b2ff777d6b433a4
20fae523f127f352a68bc
c8b8f2d6ee7b70395bafa
bd8237ada8164fddd837
6b30375c35d4d4cbcce7d
33d08069c17b409176a36
89f1ebc97c0b08fe6ae44
c19a92ac6d68448e7f1d1
3f3b360affd4222a51b4f
35342de99b5a1fb5548e4
38f2d824664562a448002
eed7fce24dedc7dc3e1ed
179973d1dae959b33716e
eb410d172708954e00632
cbf60a0e26419860c8c0b
c285d6bfe4b479de0dd18
9772a5dae676bd2a92acc
cc1369821be8cffddd8a7
```

EmailAuth:: fetch\_  
dkim\_private\_keys

EmailAuth:: install  
\_dkim\_private\_key  
s

EmailAuth:: install  
\_spf\_records

EmailAuth:: validat  
e\_current\_dkims

EmailAuth:: validat  
e\_current\_ptrs

EmailAuth:: validat  
e\_current\_spfs

ExternalAuthenticat  
ion

ExternalAuthenticat  
ion:: add\_auth\_li  
nk

ExternalAuthenticat  
ion:: configured\_  
modules

ExternalAuthenticat  
ion:: get\_authn\_lin  
ks

ExternalAuthenticat  
ion:: has\_external  
\_auth\_modules\_co  
nfigured

ExternalAuthenticat  
ion:: remove\_auth  
n\_link

Features

Features:: get\_feat  
ure\_metadata

Features:: has\_fea  
ture

Features:: list\_feat  
ures

Fileman

Fileman:: autocom  
pletedir

Fileman:: empty\_tr  
ash

Fileman:: get\_file\_  
content

Fileman:: get\_file\_i  
nformation

Fileman:: list\_files

Fileman:: save\_file  
\_content

Fileman:: transcod  
e

Fileman:: upload\_fi  
les


```
e6ecc061f8a32a9ae0661  
e4e946ed8e3827b277138  
d3a76116567cbd129cbd8  
69ef9ddd",
```

```
  "created":  
  "1365633415",  
  "domains": [  
    "example.com"  
  ],
```

```
  "key_algorithm":  
  "rsaEncryption",  
  "commonName":  
  "example.com",  
  "localityName":  
  "Houston",
```

```
  "friendly_name":  
  "TestCSR",  
  "id":  
  "example_com_bf442_a3  
e95_54c3220946c8c4952  
75386ec1728be3c"
```

- ▼ **Ftp**
  - Ftp:: add\_ftp
  - Ftp:: allows\_anonymous\_ftp
  - Ftp:: allows\_anonymous\_ftp\_incoming
  - Ftp:: delete\_ftp
  - Ftp:: ftp\_exists
  - Ftp:: get\_ftp\_daemon\_info
  - Ftp:: get\_port
  - Ftp:: get\_quota
  - Ftp:: get\_welcome\_message
  - Ftp:: kill\_session
  - Ftp:: list\_ftp
  - Ftp:: list\_ftp\_with\_disk
  - Ftp:: list\_sessions
  - Ftp:: passwd
  - Ftp:: server\_name
  - Ftp:: set\_anonymous\_ftp
  - Ftp:: set\_anonymous\_ftp\_incoming
  - Ftp:: set\_homedir
  - Ftp:: set\_quota
  - Ftp:: set\_welcome\_message

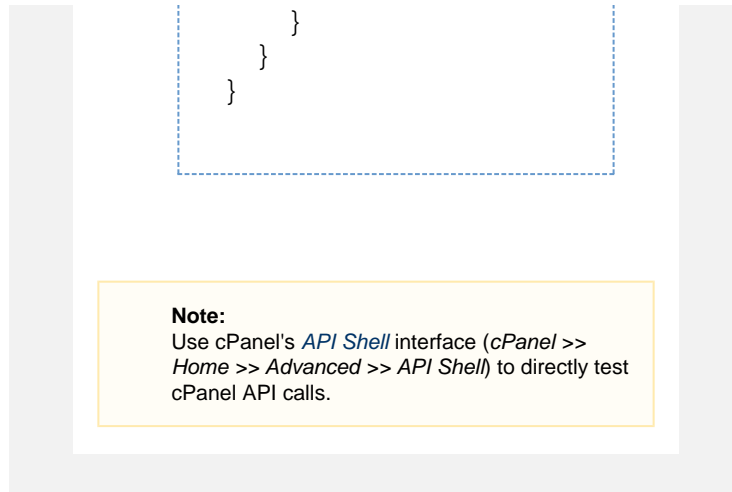

## Parameters

Parameter	Type	Description	Possible values	Example
id	string	The CSR's ID.	A valid string.	▼ <a href="#">Click to view...</a> example_com_e095f_0ab2f_ebcbe4a571276f48562241411556647f
friendly_name	string	The CSR's friendly name.	A valid string.	TestCSR

## Returns

Return	Type	Description	Possible values	Example
text	string	The parsed information from the OpenSSL command-line tool.	A valid string.	▼ <a href="#">Click to view...</a> Certificate Request:\n Data:\n Version: 0 (0x0)\n Subject: CN = example.com, C = US, emailAddress = username@example.com, O = Example, ST = Texas, L = Houston\n Subject Public Key Info:\n Public Key Algorithm: rsaEncryption\n Public-Key: (2048 bit)\n Modulus:\n

- ▼ **Integration**
  - Integration:: fetch\_url
- ▼ **KnownHosts**
  - KnownHosts:: create
  - KnownHosts:: delete
  - KnownHosts:: update
  - KnownHosts:: verify
- ▼ **LangPHP**
  - LangPHP:: php\_get\_domain\_handler
  - LangPHP:: php\_get\_impacted\_domains
  - LangPHP:: php\_get\_installed\_version



s

LangPHP:: php\_get\_system\_default\_version

LangPHP:: php\_get\_vhost\_versions

LangPHP:: php\_ini\_get\_user\_basic\_directives

LangPHP:: php\_ini\_get\_user\_content

LangPHP:: php\_ini\_get\_user\_paths

LangPHP:: php\_ini\_set\_user\_basic\_directives

LangPHP:: php\_ini\_set\_user\_content

LangPHP:: php\_set\_vhost\_versions

▼ LastLogin

LastLogin:: get\_last\_or\_current\_logged\_in\_ip

▼ Locale

Locale:: get\_attributes

▼ Mailboxes

Mailboxes:: expunge\_mailbox\_messages

Mailboxes:: expunge\_messages\_for\_mailbox\_guid

Mailboxes:: get\_mailbox\_status

Mailboxes:: has\_utf8\_mailbox\_names

Mailboxes:: set\_utf8\_mailbox\_names

▼ Market

Market:: cancel\_pending\_ssl\_certificate

Market:: create\_shopping\_cart

Market:: get\_all\_products

Market:: get\_certificate\_status\_details

Market:: get\_login\_url

Market:: get\_pending\_ssl\_certificates

```
00:bf:44:22
:cb:13:2b:7
f:41:9f:48:
85:d6:2c:77
:\n
03:cf:84:db
:90:5c:5a:e
d:e5:9c:cb:
d6:9d:4b:fc
:\n
67:58:b7:db
:71:dd:eb:8
e:5a:77:6f:
03:5d:96:85
:\n
60:dc:91:45
:59:85:ff:9
e:57:76:a5:
b5:cd:dc:48
:\n
25:89:3f:8f
:17:c1:c2:1
e:4d:ec:f0:
08:1a:a9:cc
:\n
2d:45:34:be
:82:77:a5:e
4:bb:0b:82:
bc:82:51:c3
:\n
ac:1b:ed:c3
:a4:b3:e6:1
4:4f:ba:9e:
39:af:08:ae
:\n
3c:2c:15:bd
:dc:03:17:9
3:01:95:4f:
c0:2a:0f:3b
:\n
46:5f:5e:6f
:96:d5:b2:d
d:53:22:a9:
91:e4:36:8e
:\n
f2:60:5b:ca
:b3:72:e6:b
e:53:8b:9e:
b6:72:26:04
:\n
85:37:f4:89
:c1:78:91:7
d:46:96:71:
c4:be:39:f3
:\n
cc:1d:79:bc
:33:61:5c:5
f:76:52:4a:
7d:d0:60:31
:\n
79:96:44:6e
:6a:77:72:7
0:1f:3f:08:
24:e6:d1:50
:\n
c0:6a:86:98
:df:56:8b:a
e:2f:c1:97:
bc:ed:4c:70
:\n
a1:a6:b2:7e
:25:97:8f:9
5:73:a1:84:
71:43:da:33
:\n
48:d5:44:17
:e1:28:1e:3
7:93:63:fa:
ec:45:17:39
:\n
e5:ff:62:90
:6b:b2:eb:1
1:5b:32:b2:
ce:51:0b:8a
:\n 3e:95\n
Exponent:
65537
(0x10001)\n
Attributes:
\n
a0:00\n
Signature
Algorithm:
sha1WithRSA
Encryption\n
n
41:bd:99:89
:7a:1b:c2:7
1:90:f7:5a:
17:05:c9:77
:c8:f0:0e:\n
62:0f:85:0d
```

Market:: get\_provider\_specific\_dcw\_constraints

Market:: get\_providers\_list

Market:: get\_ssl\_certificate\_if\_available

Market:: process\_ssl\_pending\_queue

Market:: request\_ssl\_certificates

Market:: set\_status\_of\_pending\_queue\_items

Market:: set\_url\_after\_checkout

Market:: validate\_login\_token

▼ Mime

Mime:: add\_handler

Mime:: add\_hotlink

Mime:: add\_mime

Mime:: add\_redirect

Mime:: delete\_handler

Mime:: delete\_hotlink

Mime:: delete\_mime

Mime:: delete\_redirect

Mime:: list\_handlers

Mime:: list\_hotlinks

Mime:: list\_mime

Mime:: list\_redirects

Mime:: redirect\_info

▼ ModSecurity

ModSecurity:: disable\_all\_domains

ModSecurity:: disable\_domains

ModSecurity:: enable\_all\_domains

ModSecurity:: enable\_domains

```
:fb:16:02:7
4:34:5f:7a:
93:3e:50:8e
:cf:f4:6f:\
n
ee:ab:7b:c9
:ef:7c:76:5
9:dd:85:fd:
7d:4e:ac:95
:9d:b7:ae:\
n
8a:89:fc:1f
:5b:ee:ee:6
b:cd:9b:4e:
2d:2a:fb:1b
:32:8f:8f:\
n
56:70:d1:42
:c1:72:ed:0
4:4b:27:5a:
ee:5a:e1:2b
:6e:53:59:\
n
aa:14:25:87
:7f:2b:c3:7
a:f5:b2:6c:
71:2a:93:62
:40:ca:87:\
n
b4:fe:34:a1
:95:77:1e:9
8:f1:71:5e:
14:97:61:73
:07:8d:bc:\
n
3e:e1:f8:47
:f7:00:8b:0
6:a5:1c:84:
a3:88:9a:7b
:37:74:5d:\
n
34:a6:ae:22
:ab:a3:b8:9
f:d7:ab:60:
9a:70:81:15
:13:0f:d9:\
n
ff:ab:7a:2b
:fd:cb:96:0
4:ad:00:6b:
e4:74:4e:59
:57:a5:9e:\
n
84:c7:74:d8
:62:08:37:b
3:ee:cc:74:
b2:b6:26:e8
:c0:37:32:\
n
19:dc:1c:ff
:97:4a:cc:1
c:36:c3:a7:
2d:ca:77:53
:c4:1d:1c:\
n
3c:36:5b:f8
:90:46:01:4
8:49:61:9b:
ef:bb:b3:a8
:94:0b:3f:\
n
50:51:93:29
:9f:aa:9a:a
b:ae:3d:3c:
72:8a:0b:bc
:2f:3f:19:\
```

ModSecurity:: has  
\_modsecurity\_inst  
alled

ModSecurity:: list\_  
domains

▼ Mysql

Mysql:: add\_host

Mysql:: add\_host\_  
note

Mysql :: check\_dat  
abase

Mysql:: create\_dat  
abase

Mysql:: create\_use  
r

Mysql:: delete\_dat  
abase

Mysql:: delete\_hos  
t

Mysql:: delete\_use  
r

Mysql:: get\_host\_n  
otes

Mysql:: get\_privile  
ges\_on\_database

Mysql:: get\_restrict  
ions

Mysql:: get\_server\_  
information

Mysql:: locate\_ser  
ver

Mysql:: rename\_d  
atabase

Mysql:: rename\_us  
er

Mysql:: repair\_dat  
abase

Mysql:: revoke\_ac  
cess\_to\_database

Mysql:: set\_passw  
ord

Mysql:: set\_privile  
ges\_on\_database

▼ Notifications

Notifications:: get\_  
notifications\_count

▼ NVData

NVData:: get

NVData:: set

▼ Parser

Parser:: firstfile\_rel  
ative\_uri

n  
d7:5d:70:14  
\n

csr

string

The CSR's text.

A valid CSR.

▼ [Click to view...](#)

- PassengerApps:: disable\_application
  - PassengerApps:: edit\_application
  - PassengerApps:: enable\_application
  - PassengerApps:: ensure\_deps
  - PassengerApps:: list\_applications
  - PassengerApps:: register\_application
  - PassengerApps:: unregister\_application
- PasswdStrength
  - PasswdStrength:: get\_required\_strength
- Personalization
  - Personalization::set
  - Personalization::get
- Postgresql
  - Postgresql:: create\_database
  - Postgresql:: create\_user
  - Postgresql:: delete\_database
  - Postgresql:: get\_restrictions
  - Postgresql:: grant\_all\_privileges
  - Postgresql:: rename\_database
  - Postgresql:: rename\_user
  - Postgresql:: rename\_user\_no\_password
  - Postgresql:: revoke\_all\_privileges
  - Postgresql:: set\_password
- Pushbullet
  - Pushbullet:: send\_test\_message
- Quota
  - Quota:: get\_quota\_info

```

-----BEGIN
CERTIFICATE
REQUEST-----
-
MIIC3TCCAaU
CAQAwgZcxFD
ASBgNVBAMM
C2V4YW1wbGUu
Y29tMRwYFA
YDVQQLDA1E
b2N1bWVudGF
0aW9uMQswCQ
YDVQQGEwJV
zEiMCAGCSqG
SIb3DQEJARY
TbGF1cmV
Y2VAY3Bhbm
sLm5ldDEUM
IGA1UECgwLY
1BhbmVsIEl
Yy4xDjAMB
VBAgMBVR1
eGFzMRAwDg
YDVQHDAdIb
VzdG9uMIIB
jANBgkqhkiG
9w0BAQEFAA
CAQ8AMIIB
CgKCAQEAp0
2NvpqyT7mg
2qDgZw1Xet
eo2l7o9r7A
ONaTrNsMgb
L/d3lrQzpc
D65SPxj/NS
povMi48tbue
3A5W6+r2CN
62oPk/d34N
2swN1w1lNT
LzOfTPqGnB
e0CRdqNonx
6818Cwj+auR
MgakqxtaES
OEx0T87Ngr
/1CIqUbTz
U0LembWh
+1VI5Djy
2CRmRwKkS
AAu7X/OJN
7cfcPh7Re
Zc9Ha6Vmz
NxbutBDR
cnCJVOAGM
sv2Cg4mQ2
hgYMC8KF1
r/ktHneDd
GJdyprmdr
0qkqzMw
TaY1b6M/9
3Yp+bswGH
4oyqa4GYe
TpRu200Ce
ydxONOYR
ZWfL0SnL
2Gnvnd3w
IDAQABoA
AwDQYJKo
ZihvcNAQE
FBQADggEB
AF1o1zJbc
viWcdZUv+
PJ7G8cAq
Fxa8a3W2a
0Y1U0BaM
rpDfuOHp
QgOt062r
r+i+hkrI
Reuk7Is
y16GeZkX
17KhQ1Vo
9aW8a8Ur
7+0RGDbx
R1K9jjW
nvSFn6cM
MqRSfADX
pptxhqBF
ZJIZMc3p
PX9Jqycu
u8bxeIv
UKeSMe3J
xc11ZXEX
X47FeRZx
vq+WXF9
4Xu4KZ
XHdzB5t
B6jPhzIa
N0/3d92
N/KhvCcn
w3YC2fE
GDKp0LZa
oa7072+a
q5K3bM1
htFv9de
AHqIHeFV
4110rxU
CIKIhdP
IjvAm77
41DHLzP
pJVrshO
/NpA74L
Ekny5FM
wKkx+6J
gx1HSWuc
n5kWek=
-----END
CERTIFICATE
REQUEST-----
-

```

- Resellers
  - Resellers:: list\_accounts
- ResourceUsage
  - ResourceUsage:: get\_usages
- Restore
  - Restore:: directory\_listing
  - Restore:: get\_users
  - Restore:: query\_file\_info
  - Restore:: restore\_file
- Session
  - Session:: create\_temp\_user
- SiteTemplates
  - SiteTemplates:: list\_site\_templates
  - SiteTemplates:: list\_user\_settings
  - SiteTemplates:: publish
- SpamAssassin
  - SpamAssassin :: clear\_spam\_box
  - SpamAssassin:: get\_symbolic\_test\_names
  - SpamAssassin:: get\_user\_preferences
  - SpamAssassin:: update\_user\_preference
- SSH
  - SSH:: get\_port
- SSL
  - SSL:: add\_autossl\_excluded\_domains
  - SSL:: can\_ssl\_redirect
  - SSL:: check\_shared\_cert
  - SSL:: delete\_cert
  - SSL:: delete\_csr
  - SSL:: delete\_key
  - SSL:: delete\_ssl
  - SSL :: disable\_mail\_sni

details	hash	A hash of the CSR's contents.	This hash includes the organizationalUnitName, emailAddress, organizationName, countryName, stateOrProvinceName, modulus, created, domains, key_algorithm, commonName, friendly_name, and id returns.	
organizationalUnitName	string	The CSR's organizational unit name.  The function returns this value in the details hash.	A valid string.	Department
emailAddress	string	The CSR's email address.  The function returns this parameter in the details hash.	A valid string.	username@example.com
organizationName	string	The CSR's organization name.  The function returns this value in the details hash.	A valid string.	Organization
countryName	string	The CSR's country name.  The function returns this value in the details hash.	A valid two-letter ISO-3166 country code.	US
stateOrProvinceName	string	The CSR's state or province name.  The function returns this value in the details hash.	A valid string.	Texas
modulus	string	The CSR's modulus.  The function returns this value in the details hash.	A valid string.	<ul style="list-style-type: none"> <li>Click to view...</li> <li>a74f7636fa6</li> <li>ac93ee6836a</li> <li>83a995b55de</li> <li>b5019ea36d7</li> <li>ba3dafb00e3</li> <li>8d693acdb0c</li> <li>81b2ff77d6</li> <li>b433a420fae</li> <li>523f127f352</li> <li>a68bcc8b8f2</li> <li>d6ee7b70395</li> <li>bafabd8237a</li> <li>da8164fddd</li> <li>8376b30375c</li> <li>35d4d4cbce</li> <li>7d33d08069c</li> <li>17b409176a3</li> <li>689f1ebc97c</li> <li>0b08fe6ae44</li> <li>c19a92ac6d6</li> <li>8448e7f1d13</li> <li>f3b360affd4</li> <li>222a51b4f35</li> <li>342de99b5a1</li> <li>fb5548e438f</li> <li>2d824664562</li> <li>a448002eed7</li> <li>fce24dedc7d</li> <li>c3e1ed17997</li> <li>3d1dae959b3</li> <li>3716eeb410d</li> <li>172708954e0</li> <li>0632cbf60a0</li> <li>e26419860c8</li> <li>c0bc285d6bf</li> <li>e4b479de0dd</li> <li>189772a5dae</li> <li>676bd2a92ac</li> <li>ccc1369821b</li> <li>e8cffddd8a7</li> <li>e6ecc061f8a</li> <li>32a9ae0661e</li> <li>4e946ed8e38</li> <li>27b277138d3</li> <li>a76116567cb</li> <li>d129cbd869e</li> <li>f9ddf</li> </ul>

SSL:: enable\_mail\_sni

SSL:: fetch\_best\_for\_domain

SSL:: fetch\_cert\_info

SSL:: fetch\_certificates\_for\_fqdns

SSL:: fetch\_key\_and\_cabundle\_for\_certificate

SSL:: find\_certificates\_for\_key

SSL:: find\_csrs\_for\_key

SSL:: generate\_certificate

SSL:: generate\_certificate

SSL:: generate\_key

SSL:: get\_autossl\_excluded\_domains

SSL:: get\_autossl\_pending\_queue

SSL:: get\_autossl\_problems

SSL:: get\_cabundle

SSL:: get\_cn\_name

SSL:: install\_ssl

SSL:: installed\_hosts

SSL:: installed\_hosts

SSL:: is\_autossl\_check\_in\_progress

SSL:: is\_mail\_sni\_supported

SSL:: is\_sni\_supported

SSL:: list\_certs

SSL:: list\_csrs

SSL:: list\_keys

SSL:: list\_ssl\_items

SSL:: mail\_sni\_status

SSL:: rebuild\_mail\_sni\_config

created	string	The CSR's creation date.  The function returns this value in the details hash.	A date in Unix time format.	1365633415
domains	string	The domains that the CSR covers.  The function returns this value in the details hash.	A valid domain name or list of domains.	example.com
key_algorithm	string	The key algorithm that encrypts the CSR.  The function returns this value in the details hash.	A valid string.	rsaEncryption
commonName	string	The CSR's Common Name or Distinguished Name.  The function returns this value in the details hash.	A valid string.	example.com
friendly_name	string	The CSR's friendly name.  The function returns this value in the details hash.	A valid string.	TestCSR
id	string	The CSR's ID.  The function returns this value in the details hash.	A valid string	<a href="#">Click to view...</a> example.com_c69ce_37ff5_1397169490_169c717cb2c260281df792788accf041

SSL:: rebuildssldb

SSL:: remove\_aut  
ossl\_excluded\_do  
mains

SSL:: set\_autossl\_  
excluded\_domains

SSL:: set\_cert\_frie  
ndly\_name

SSL:: set\_csr\_frien  
dly\_name

SSL:: set\_key\_frie  
ndly\_name

SSL:: set\_primary  
\_ssl

SSL:: set\_ssl\_shar  
e

SSL:: show\_cert

SSL:: show\_csr

SSL:: show\_key

SSL:: start\_autossl\_  
\_check

SSL:: toggle\_ssl\_r  
edirects\_for\_doma  
ins

SSL:: upload\_cert

SSL:: upload\_key

▼ StatsBar

StatsBar:: get\_stat  
s

▼ Styles

Styles:: current

Styles:: list

Styles:: set\_default

Styles:: update

▼ SubDomain

SubDomain:: adds  
ubdomain

▼ Themes

Themes:: get\_the  
me\_base

Themes:: list

Themes:: update

▼ Tokens

Tokens:: create\_fu  
ll\_access

Tokens:: list

Tokens:: rename

Tokens:: revoke

▼ TwoFactorAuth

TwoFactorAuth:: generate\_user\_configuration

TwoFactorAuth:: get\_user\_configuration

TwoFactorAuth:: remove\_user\_configuration

TwoFactorAuth:: set\_user\_configuration

▼ UserManager

UserManager:: check\_account\_conflicts

UserManager:: create\_user

UserManager:: delete\_user

UserManager:: dismiss\_user

UserManager:: edit\_user

UserManager:: list\_users

UserManager:: lookup\_service\_account

UserManager:: lookup\_user

UserManager:: merge\_service\_account

UserManager:: unlink\_service\_account

▼ UserTasks

UserTasks:: delete

UserTasks:: retrieve

▼ VersionControl

VersionControl:: create

VersionControl:: delete

VersionControl:: retrieve

VersionControl:: update

▼ VersionControlDeployment

VersionControlDeployment:: create



VersionControlDeployment:: delete

VersionControlDeployment:: retrieve

▼ WebDisk

WebDisk:: delete\_user

WebDisk:: set\_homedir

WebDisk:: set\_password

WebDisk:: set\_permissions

▼ WebmailApps

WebmailApps:: list\_webmailapps

▼ WebVhosts

WebVhost:: list\_domains

WebVhost:: list\_ssl\_capable\_domains

▼ WordPressBackup

WordPressBackup:: any\_running

WordPressBackup:: cancel

WordPressBackup:: cleanup

WordPressBackup:: get\_available\_backups

WordPressBackup:: is\_running

WordPressBackup:: start

▼ WordPressInstance

Manager

WordPressInstanceManager:: cancel\_scan

WordPressInstanceManager:: cleanup\_scan

WordPressInstanceManager:: change\_admin\_password

WordPressInstanceManager:: configure\_autoupdate

WordPressInstanceManager:: get\_api\_version

WordPressInstanceManager:: get\_in

stance\_by\_id

WordPressInstanceManager::get\_instances

WordPressInstanceManager::get\_latest\_wordpress\_version\_from\_wordpress\_org

WordPressInstanceManager::get\_scan\_results

WordPressInstanceManager::is\_installable\_addon\_available

WordPressInstanceManager::start\_scan

▼ WordPressRestore

WordPressRestore::any\_running

WordPressRestore::cleanup

WordPressRestore::start